



PRODUCT ADVANTAGES

- TOP-DRY: integrated drying technology - no need for manual drying.
- VAPOSTOP²: integrated steam condensation allows door opening without steam cloud. Also no steam escape during the condensation phase
- **500X500mm basket glasswasher: with 100% integrated reverse osmosis - installation height is 820 mm.**
- VISIOTRONIC-TOUCH control: single button control with colour code and remaining cycle time indication. With colour display and touch.
- WASHSMART APP: controlling your warewash operation with smart technology: status and messages, usage and operating cost, hygiene, order service and consumables
- SENSO-ACTIVE resource management: constantly measures the quality of the wash water and keeps the amount of rinsing needed in each rinse cycle to a minimum in order to guarantee a fully hygienic wash result
- CLIP-IN wash and rinse arms: wash and rinse arms can be removed with one hand and without any tools
- Intelligent data documentation: automatic recording of important operational data and consumptions and indication on the display
- USB-interface: comfortable download of operational data in form of a protocol via USB
- GENIUS-X² fine filter system: advanced filter system with pre-wash function reduces detergent consumption up to 35%
- Intensive programme: intensive rinse cycle to wash glasses with critical design with raised fresh-water amount
- Interlocked strainer: prevents operation without tank strainer
- Hygiene programme: for removal of calcium carbonate and other deposits from wash chamber


TECHNICAL DATA

Cycle times*	1. 60sec 2. 900sec 3. 120 sec 4. Continuous (20mins)
Water consumption	2.0 l/rack
Tank capacity	10.6 l
Tank heating	0.8 kW
Power supply	415 / 50 / 3N (240 / 50 / 1)
Booster loading	
Standard	6.2 kW
Alternative	4.1 kW
Total loading	
Standard	6.8 kW 3 x 15 A
Alternative	5.6 kW 25 A
Wash pump	0.6 kW 350 l/min
Rack size	500 x 500 mm
Loading height	305 mm
Noise level	60.5 dB (A)
Weight (gross / net)	70 / 60 kg

*Thermostop guarantees required temperatures with cold water and / or 240 V connection, the actual cycle times extend accordingly.

For machine protection the water hardness should not exceed 3°dH, if higher we recommend using an integrated water softener or an external water softener of the product line HYDROLINE PROTECT.

DIMENSIONAL DRAWING

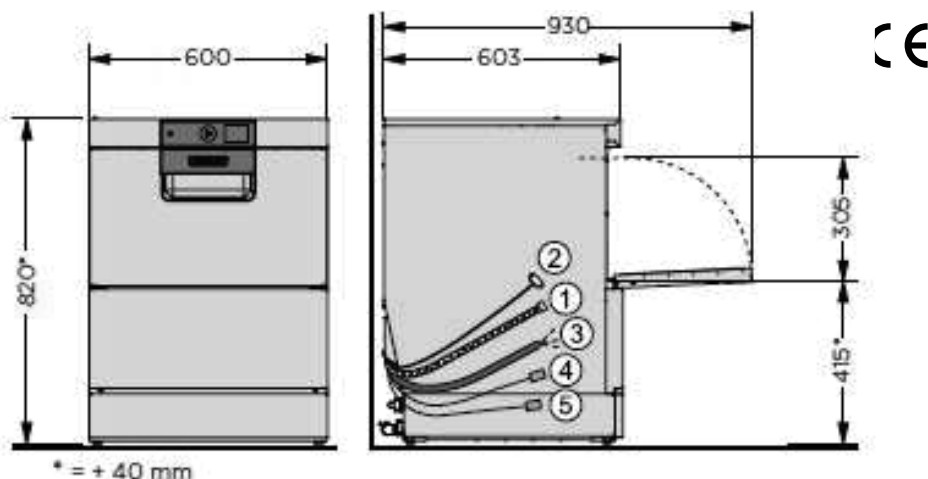

CONNECTIONS

① Drain hose	2,000 mm ID20/OD25
② Supply hose	2,000 mm R 3/4"
Required flow rate	5 l/min
Flow pressure	0.5 (0.8 with softener)- 6 bar
Max. supply water temperature	60 °C
③ Power cord	2,000 mm
Supply hose for	
④ Detergent	2,500 mm
⑤ Rinse aid	2,500 mm