

P1R, P2R Rack Prover




Product Features

- Full stainless steel construction internal and external
- Swing door fitted as standard
- Easy to use electronic panel
- Fitted with floor as standard
- Accommodates 750mm x 525mm racks
- Humidity adjustable up to 100%
- Temperature adjustable up to 40°C




P1R

P1R, P2R Rack Prover

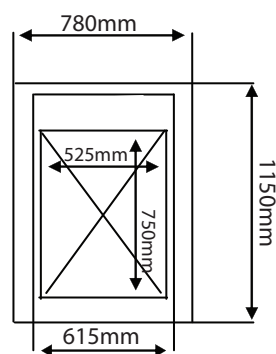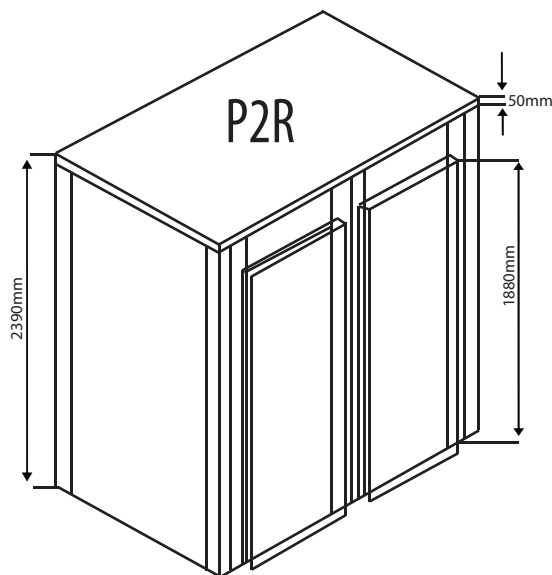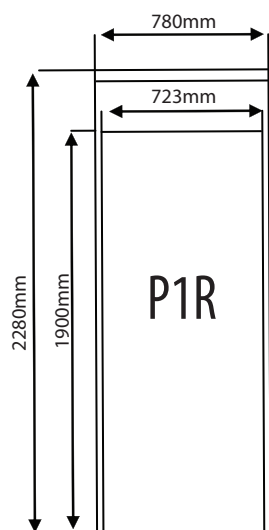

Door opening direction

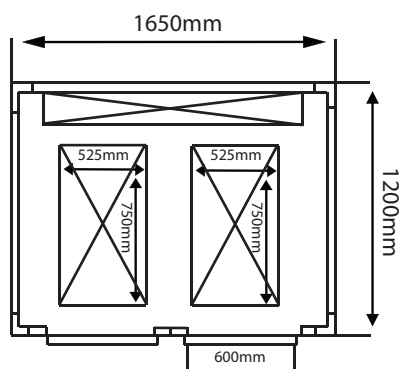

Digital Control Panel



Model	Width	Depth	Height	Electrical Requirements	Capacity
P23	780mm	1150mm	2280mm	240V, 1P+N+E, 50Hz, 15amp	1 rack
P2R	1860mm	1200mm	2390mm	400-415V, 3P+N+E, 50Hz, 20amp	2 racks

Additional Technical Information

Dimensions EXCLUDE all protrusions - door handles, drain exits etc...

Minimum Ceiling Height required - 2850mm

Units require the following:

- Drain Outlet
- 1/2" BSP Inlet



WA DEALER
PRACTICAL PRODUCTS PTY LTD

PH: 08 9302 1299
51 Paramount Dr Wangara WA 6065
sales@practicalproducts.com.au
www.practicalproducts.com.au