

Technical data sheet for

P8M DOUBLE STACKED

Full Size Manual / Electric Prover/Holding Cabinet Double Stacked



P8M/2

P8M units shall be Moffat electrically heated Turbofan Prover and Holding Cabinets. The prover and holding cabinets shall have double skin construction with stainless steel interior and exterior sides, front and top. Doors shall be side hinged and field reversible. Units shall have capacity for up to 16 half size sheet pans or 8 full size sheet pans. A single speed fan shall gently and evenly circulate air around the cabinet. Cabinets shall be controlled by a mechanical thermostat and humidity via a control of the water tank, thermometers shall indicate the cabinet temperature. Prover and Holding Cabinets shall be fitted with 10A plug-in cordsets. The prover and holding cabinets shall be double stacked using Double Stacking Kit DSKP8. Units shall be supplied in 100% recyclable shipping packaging.

Double stacked models are supplied as two individual prover and holding cabinets and a double stacking kit for field assembly.

STANDARD FEATURES

DOUBLE STACKED

- Two 8 full size sheet pan capacity
- Two 16 half size sheet pan capacity
- Compact 735mm width
- Full stainless steel spacer frame

PROVER/HOLDING CABINET FEATURES (each)

- Dual function Prover and Holding Cabinet
- 8 18" x 26" / 460 x 660 full size sheet pan capacity
- 16 18" x 13" / 460 x 330 half size sheet pan capacity
- 8 600 x 400 tray capacity (optional kit)
- 76mm tray spacing
- 10A plug-in cordset fitted
- Full double skin construction
- Auto water fill system with optional integrated water filter kit
- Continuous door seal
- Side hinged door (standard LH hinge). Optional RH hinge (field convertible)
- Off / Prove / Hold mode selection
- Low velocity circulation fan system
- Mechanical thermostat
- Humidity level control
- Dual halogen cabinet interior lamps
- Cabinet temperature display thermometer

ACCESSORIES

- 600 x 400 tray racking kit
- Optional 3M Cuno water filter kit complete with cartridge and connection fittings
- Installs in pre-fitted rear housing of cabinet for flush rear installation

turbofan®

P8M/2 Full Size Manual / Electric Prover/Holding Cabinet

CONSTRUCTION- PROVERS

- 304 stainless steel interior cabinet
- Stainless steel front, sides and top exterior
- Stainless steel interior side racks
- Stainless steel frame side hinged door
- 5mm thick door glass
- Stainless steel control panel
- Aluminised coated steel base and rear panels

CONSTRUCTION - DOUBLE STACKING KIT

- Stainless steel spacer frame

CONTROLS

- Off / Prove / Holding mode selector switch.
- Mechanical thermostat 20-85°C
- Air heating ON control panel indicator
- Humidity level control
- Humidity tank ON control panel indicator
- Cabinet temperature thermometer
- Auto-fill water system standard

CLEANING

- Stainless steel top and side exterior panels
- Stainless steel interior chamber
- Easy access to all interior surfaces
- Fully removable stainless steel rack support
- Removable humidity water tank (no tools)

SPECIFICATIONS

Electrical Requirements (each prover)
230-240V, 50Hz, 1P+N+E, 1.5kW, 6.3A
10A cordset fitted

Water Requirements (optional)
Cold water connection 3/4" BSP male
550kpa maximum inlet pressure /
150kpa minimum inlet pressure

External Dimensions

Width 735mm
Height 1792mm
Depth 810mm

Prover Internal Dimensions (each prover)

Width 465mm
Height 730mm
Depth 700mm
Volume 0.24m3

Nett Weight

164kg

Packing Data (P8M provers each)

95.3kg
0.76m3
Width 760mm
Height 1080mm
Depth 925mm

Double Stacking Kits


For after market double stacking two P8M prover/holding cabinets
DSKP8 - Double stacking kit

INSTALLATION CLEARANCES

Rear 0mm
LH Side 0mm
RH Side 25mm

CLEARANCE FROM SOURCES OF HEAT

A minimum distance of 300mm from the appliance sides is required

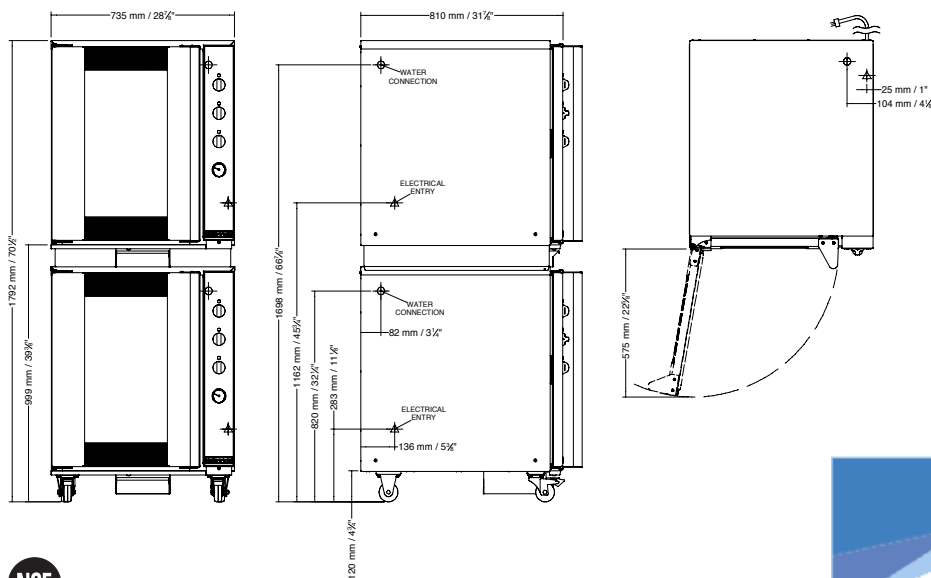

an Ali Group Company



The Spirit of Excellence

PH: 08 9302 1299
51 Paramount Dr Wangara WA 6065
sales@practicalproducts.com.au
www.practicalproducts.com.au