

Technical data sheet for

P85M8 PROVER/HOLDING CABINE

Full Size 8 Tray Electric / Manual Prover/Holding Cabinet



STANDARD FEATURES

- Dual function Prover and Hold
- Designed for individual use or Turbofan E35D and E35T Con
- 8 406mm x 736mm / 16" x 2
- 76mm tray spacing
- 910mm width
- 10A cordset fitted
- Full double skin construction
- Auto water fill system with optio
- Continuous door seal
- Side hinged door (standard LH (field convertible)
- Off / Proof / Hold mode selecti
- Low velocity circulation fan sys
- Mechanical thermostat
- Humidity level control
- Dual halogen cabinet interior I
- Cabinet temperature display th
- 4 dia. 76mm castors with 2 for swivel lock, 2 rigid rear castors
- 100% recyclable packaging

OPTIONS

- 457mm x 762mm / 18" x 30"

ACCESSORIES

- Optional M236060 Core Temp
- Optional 3M Cuno water filter k cartridge and connection fitting housing of cabinet for flush rea



P85M8

Unit shall be a Moffat electrically heated Turbofan Prover and Holding Cabinet. The prover and holding cabinet shall have double skin construction with stainless steel interior and exterior sides, front and top. Door shall be side hinged and field reversible. Unit shall have capacity for 8 16" x 29" trays, or 8 18" x 30" trays with optional 18" rack set. A single speed fan shall gently and evenly circulate air around the cabinet. Cabinet shall be controlled by a mechanical thermostat and humidity via a control of the water tank. A thermometer shall indicate the cabinet temperature. Prover and holding cabinet shall be mounted on castors, with two rigid castors at rear and two swivel castors dual swivel and wheel lock and front. Prover and Holding cabinet shall operate independently or in combination with Moffat Turbofan model E35D or E35T Convection Ovens. Prover and Holding Cabinets shall be fitted with 10A cordsets. Unit shall be supplied in 100% recyclable shipping packaging.

turbofan®

P85M8

P85M8 Full Size Manual / Electric Prover/Holding Cabinet

CONSTRUCTION

- 304 stainless steel interior cabinet
- Stainless steel front, sides and top exterior
- Stainless steel interior side racks
- Stainless steel frame side hinged door
- 5mm thick door glass
- Stainless steel control panel
- Aluminised coated steel base and rear panels

CONTROLS

- Off / Proof / Holding mode selector switch.
- Mechanical thermostat 20-85°C
- Air heating ON control panel indicator
- Humidity level control
- Humidity tank ON control panel indicator
- Cabinet temperature thermometer
- Auto-fill water system standard

CLEANING

- Stainless steel top and side exterior panels
- Stainless steel interior chamber
- Easy access to all interior surfaces
- Fully removable stainless steel rack support
- Removable humidity water tank (no tools)

SPECIFICATIONS

Electrical Requirements

- 230-240V, 50Hz, 1 phase, 1.5kW, 6.2A
- 10A cordset fitted

Water Requirements (optional)

- Cold water connection ¾" BSP male
- 80psi maximum inlet pressure / 20psi minimum inlet pressure

External Dimensions

- Width 910mm
- Height 914mm including dia. 76mm castors
- Depth 880mm

Prover Internal Dimensions

- Width 465mm
- Height 730mm
- Depth 795mm
- Volume 0.27m³

Nett Weight (P85M8)

93kg

Packing Data (P85M8)


- 133kg
- 1.05m³
- Width 950mm
- Height 1070mm
- Depth 1020mm

INSTALLATION CLEARANCES

- Rear 25mm
- LH Side 25mm
- RH Side 25mm

CLEARANCE FROM SOURCES OF HEAT

A minimum distance of 300mm from the appliance sides is required

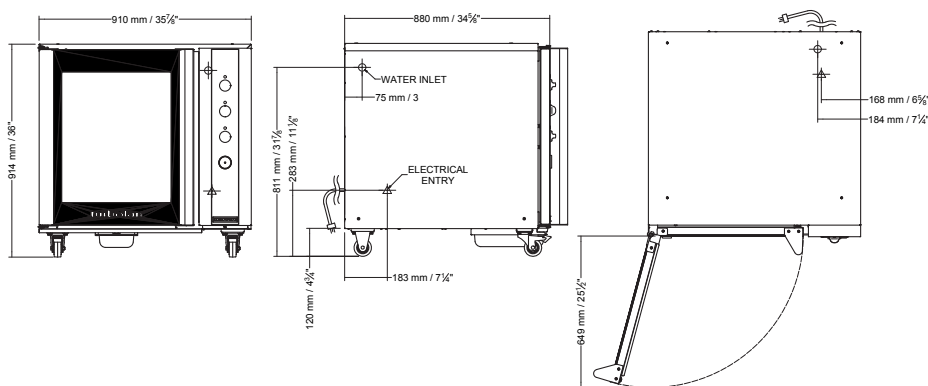

an Ali Group Company



The Spirit of Excellence



WA DEALER
PRACTICAL PRODUCTS PTY LTD

PH: 08 9302 1299
51 Paramount Dr Wangara WA 6065
sales@practicalproducts.com.au
www.practicalproducts.com.au