

Electrolux PROFESSIONAL

Modular Cooking Range Line 700XP 400mm Gas Fry Top, Smooth Brushed Chrome Plate



371320 (E7IIKAAOMCA)

Half module gas Fry Top with smooth brushed chrome cooking Plate, sloped, thermostatic control, scraper included

Short Form Specification

Item No.

To be installed on open base installations or bridging supports. Smooth cooking surface in brushed chrome. Suitable to be used with Natural or LPG gas. Temperature range from 100°C to 280°C. Removable drawer below the cooking surface for the collection of grease and fat. Exterior panels in stainless steel with Scotch Brite finish. One piece pressed work top in 1.5 mm thick stainless steel. Rightangled side edges to allow flush-fitting junction between units.

Main Features

- Unit to be mounted on open base cupboards, bridging supports or cantilever systems.
- Large drain hole on cooking surface permits the draining of fat into large 1 liter collector placed under the cooking surface.
- Large grease collection container available as optional accessory to be installed under top units over open base cupboard.
- Stainless steel high splash guard on the rear and sides of cooking surface. Splash guard can be easily removed for cleaning.
- Piezo spark ignition for added safety.
- Gas appliance supplied for use with natural or LPG gas, conversion jets supplied as standard.
- IPx4 water protection.
- Frontal simmering zone.
- Temperature range from 100° up to 280°C.
- Rough brushed chrome surface is highly resistant to scratches and facilitates cleaning operations at the end of the day.
- Scraper for smooth plate included as standard.

Construction

- Cooking surface completely smooth.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- One piece pressed 1.5 mm work top in Stainless steel.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- Cooking surface 12mm thick brushed chrome for optimum grilling results and ease of use.

Included Accessories

 1 of Scraper for smooth plate f 	fry PNC 164255
tops	

Optional Accessories

1600mm

Scraper for smooth plate fry tops	PNC 164255 □
• Junction sealing kit	PNC 206086 □
• Draught diverter, 120 mm diameter	PNC 206126
 Matching ring for flue condenser, 120 mm diameter 	PNC 206127 □
• Support for bridge type installation, 800mm	PNC 206137 □
• Support for bridge type installation, 1000mm	PNC 206138 □
• Support for bridge type installation, 1200mm	PNC 206139 □
• Support for bridge type installation, 1400mm	PNC 206140 □

Support for bridge type installation, PNC 206141

APPROVAL:





Modular Cooking Range Line 700XP 400mm Gas Fry Top, Smooth Brushed Chrome Plate


 Support for bridge type installation, 400mm 	PNC 206154 □
Chimney upstand, 400mm	PNC 206303 □
Right and left side handrails	PNC 206307 □
Back handrail 800mm, Marine	PNC 206308 □
• Flue condenser for 1/2 module, 120 mm diameter	PNC 206310
 Grease/oil kit container for 700 line frytops (half and module) and 900 line frytops (module) 	PNC 206346 □
• Chimney grid net, 400mm (700XP/900)	PNC 206400 □
• Frontal handrail, 400mm	PNC 216046 □
• Frontal handrail, 800mm	PNC 216047 □
• Frontal handrail, 1200mm	PNC 216049 □
• Frontal handrail, 1600mm	PNC 216050 □
 Large handrail - portioning shelf, 400mm 	PNC 216185 🗆
 Large handrail - portioning shelf, 800mm 	PNC 216186 🗆
 2 side covering panels for top appliances 	PNC 216277 □
Pressure regulator for gas units	PNC 927225 ☐






Modular Cooking Range Line 700XP 400mm Gas Fry Top, Smooth **Brushed Chrome Plate**

Front E 13 1/16 355 331 **(** 0 7/16 14 7/8 " 0 7/16 " 11 mm 378 mm 11 mm Side 30 13/16 " 782 mm 28 3/4 " 730 mm



Equipotential screw

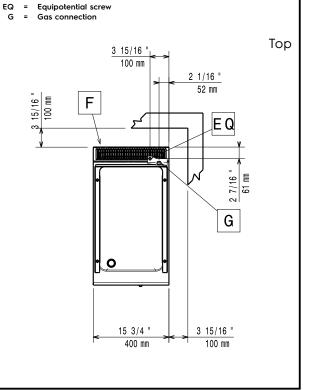

Gas

Gas Power:

371320 (E7IIKAAOMCA) 7 kW

Standard gas delivery: Natural Gas G20 (20mbar)

Gas Type Option: LPG Gas Inlet: 1/2"

Key Information:

Cooking surface width: 330 mm Cooking surface depth: 540 mm **Working Temperature MIN:** 100 °C Working Temperature MAX: 280 °C External dimensions, Width: 400 mm External dimensions, Height: 250 mm External dimensions, Depth: 730 mm Net weight: 40 kg Shipping weight: 42 kg Shipping height: 530 mm Shipping width: 460 mm 820 mm Shipping depth: Shipping volume: 0.2 m³

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

WA DEALER PRACTICAL PRODUCTS PTY LTD

PH: 08 9302 1299 51 Paramount Dr Wangara WA 6065 sales@practicalproducts.com.au www.practicalproducts.com.au

Modular Cooking Range Line 700XP 400mm Gas Fry Top, Smooth Brushed Chrome Plate

