

# **DROP-IN & BUILT-IN HEATED SHELVES**



(FOOD SERVICE MACHINERY PTY. LTD.) **HEAD OFFICE:** UNIT E6, 63-85 TURNER STREET,

PORT MELBOURNE, VIC. 3207 AUSTRALIA

T: +61 3 8645 2555 F: +61 3 8645 2565

E: sales@fsm-pl.com.au W: www.fsm-pl.com.au

## SYDNEY OFFICE:

UNIT 15, 7-9 PROGRESS CIRCUIT, PRESTONS, NSW 2170 AUSTRALIA T: +61 2 9608 8620 F: +61 2 9607 9370 E: sales@fsm-pl.com.au W: www.fsm-pl.com.au

### QUEENSLAND:

T: 0400 099 992 E: sales @fsm-pl.com.au W: www.fsm-pl.com.au




## **BLACK GLASS SHELF**

The Hatco Heated Black Glass Shelf has a smooth black glass to add just the right touch to any decor.

Thermostatically-controlled ceramic surface creates uniform heat across the entire area that can range from 100° to 200° F (38° - 93° C). The black glass is foodsafe and allows you to place food product directly on the surface.

The Choice is Yours.

- Lighted On/Off rocker switch
- Equipped with an attached trim mounting ring that is available in stainless steel (standard) or Designer Black powdercoated
- Includes a remote box with a 3' (914 mm) conduit and 6' (1829 mm) cord and pluq

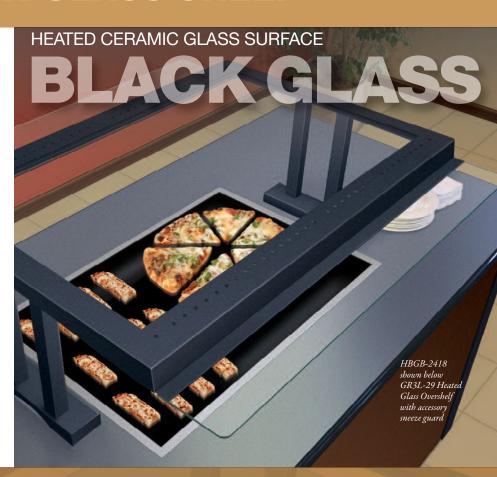

	CODE	DIMENSIONS	WATTS
	HBGB-2418	498 mm long x 610 mm wide	425
1	HBGB-3018	498 mm long x 762 mm wide	525
	HBGB-3618	498 mm long x 914 mm wide	630
	HBGB-4818	498 mm long x 1220 mm wide	850
No.	HBGB-6018	498 mm long x 1524 mm wide	1050
1	HBGB-7218	498 mm long x 1828 mm wide	1260

Units over 914 mm (36") are constructed of two equal size pieces of glass. Portable models include 102 mm (4") legs.

Recommended for use in a metallic countertop. For other surfaces, verify that the material is suitable for temperatures up to 94°C

Due to our policy of continual product development and improvement, all details and specification are subject to change without notice.

T: 0400 099 992

E: sales @fsm-pl.com.au W: www.fsm-pl.com.au



# **GLO-RAY® RECESSED TOP HEATED SHELF**

Let Hatco add heat to your serving surface with the Glo-Ray® Built-in Heated Shelf. This ¹/2" (13 mm) recessed top foodwarmer has a hardcoated aluminum top and blanket-type element for uniform heat to extend your food holding time. Widths from 25¹/2" to 73¹/2" (648-1867 mm). The Choice is Yours.

- 3' (914 mm) flexible conduit to a remote control enclosure
- Enclosure includes control thermostat, an illuminated power switch, and mounting brackets
- Thermostatically-controlled heated base



	С
	GF
The state of the s	GF

CODE	DIMENSIONS	WATTS
GRSB-24-I	610 mm long x 533 mm wide	550
GRSB-30-I	762 mm long x 533 mm wide	665
GRSB-36-I	914 mm long x 533 mm wide	780
GRSB-42-I	1067 mm long x 533 mm wide	885
GRSB-48-I	1219 mm long x 533 mm wide	1000
GRSB-54-I	1372 mm long x 533mm wide	1110
GRSB-60-I	1524 mm long x 533 mm wide	1220
GRSB-72-I	1829 mm long x 533 mm wide	1440

Due to our policy of continual product development and improvement, all details and specification are subject to change without notice.

T: 0400 099 992

E: sales @fsm-pl.com.au W: www.fsm-pl.com.au



# **GLO-RAY® FLUSH TOP HEATED SHELF**



Another choice for your serving surface is the Glo-Ray Built-in Flush Top Heated Shelf. This foodwarmer has a hardcoated aluminum top and blanket-type element for uniform heat to extend your food holding time. Available in widths from 25<sup>1</sup>/<sub>2</sub>" to 73<sup>1</sup>/<sub>2</sub>."(648-1867 mm). The Choice is Yours.

- Uniform heat distribution with hardcoated aluminum top and blanket-type element
- 3' (914 mm) flexible conduit to a remote control enclosure
- Enclosure includes control thermostat, an illuminated power switch, and mounting brackets
- Thermostatically-controlled heated base
- Optional stainless steel surface

CODE	DIMENSIONS	WATTS
GRSBF-24-I	Dimensions: 648 x 533 x 60 mm	550
GRSBF-30-I	Dimensions: 800 x 533 x 60 mm	665
GRSBF-36-I	Dimensions: 953 x 533 x 60 mm	780
GRSBF-42-I	Dimensions: 1105 x 533 x 60 mm	885
GRSBF-48-I	Dimensions: 1257 x 533 x 60 mm	1000
GRSBF-60-I	Dimensions: 1562 x 533 x 60 mm	1220
GRSBF-72-I	Dimensions: 1867 x 533 x 60 mm	1440




# **SPECIFICATIONS**

### **BUILT-IN HEATED BLACK GLASS** SHELVES

Model HBGB Heated Black Glass Shelves

Made of foodsafe materials. Available in single phase only, with a temperature range of 38°-93° C.



#### Minimum Width Maximum Width Minimum Depth Maximum Depth HBGB-2418 625 mm 632 mm 473 mm 480 mm 480 mm HBGB-3018 778 mm 784 mm 473 mm HBGR-3618 930 mm 937 mm 473 mm 480 mm 473 mm HBGB-4818 1235 mm 1241 mm 480 mm HBGB-6018 1540 mm 1546 mm 473 mm 480 mm HBGB-7218 1845 mm 1851 mm 473 mm 480 mm

### BUILT-IN HEATED STONE SHELVES

Model GRSSB Built-in Heated Stone Shelves

Made of simulated stone foodsafe materials. Available in single phase only, with a temperature range of

Models come in four Decorative Stone Colors

#### GRSSB 651 to 1870 mm 498 mm 610 to 1829 m 457 mm For Recessed Models height = 70mm SIDE VIEW FRONT VIEW **GRSSB Countertop Cut-Out Dimensions**

178 mm

#### **HEATED STONE COLORS**





Bermuda Sand





FRONT VIEW

Printed colors are a representation and may not exactly match our Heated

#### Minimum Width Maximum Width Model Minimum Depth **Maximum Depth** GRSSB-2418 625 mm 632 mm 473 mm 480 mm 473 mm GRSSB-3018 778 mm 784 mm 480 mm 480 mm GRSSB-3618 930 mm 937 mm 473 mm GRSSB-4818 1235 mm 1241 mm 473 mm 480 mm GRSSB-6018 480 mm 1540 mm 1546 mm 473 mm

1851 mm

473 mm


480 mm

1845 mm

### **GLO-RAY® BUILT-IN HEATED SHELVES**

### Model GRSB Built-in Heated Shelf with Recessed Top

Available in 240 volts, single phase, Flush mount control box bezel available in seven Designer colors.

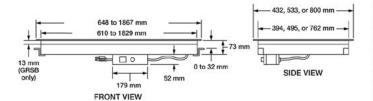


#### Model GRSBF Built-in Heated Shelf with Flush Mount Top

Available in 240 volts, single phase,

Flush mount control box bezel available in seven *Designer* colors.

Optional Stainless Steel surface also available.



#### GRSB/GRSBF Countertop Cut-Out Dimensions

GRSSB-7218

Item	Minimum Width	Maximum Width	Minimum Depth	Maximum Depth
GRSB-24-F/GRSBF-24-F	622 mm	629 mm	406 mm	413 mm
GRSB-24-I/GRSBF-24-I	622 mm	629 mm	508 mm	514 mm
GRSBF-24-S	622 mm	629 mm	622 mm	629 mm
GRSB-24-0/GRSBF-24-0	622 mm	629 mm	775 mm	781 mm
GRSB-30-F/GRSBF-30-F	775 mm	781 mm	406 mm	413 mm
GRSB-30-I/GRSBF-30-I	775 mm	781 mm	508 mm	514 mm
GRSBF-30-S	775 mm	781 mm	622 mm	629 mm
GRSB-30-0/GRSBF-30-0	775 mm	781 mm	775 mm	781 mm
GRSB-36-F/GRSBF-36-F	927 mm	934 mm	406 mm	413 mm
GRSB-36-I/GRSBF-36-I	927 mm	934 mm	508 mm	514 mm
GRSBF-36-S	927 mm	934 mm	622 mm	629 mm
GRSB-36-0/GRSBF-36-0	927 mm	934 mm	775 mm	781 mm
GRSB-42-F/GRSBF-42-F	1080 mm	1086 mm	406 mm	413 mm
GRSB-42-I/GRSBF-42-I	1080 mm	1086 mm	508 mm	514 mm
GRSBF-42-S	1080 mm	1086 mm	622 mm	629 mm
GRSB-42-0/GRSBF-42-0	1080 mm	1086 mm	775 mm	781 mm
GRSB-48-F/GRSBF-48-F	1232 mm	1238 mm	406 mm	413 mm
GRSB-48-I/GRSBF-48-I	1232 mm	1238 mm	508 mm	514 mm
GRSBF-48-S	1232 mm	1238 mm	622 mm	629 mm
GRSB-48-0/GRSBF-48-0	1232 mm	1238 mm	775 mm	781 mm
GRSB-54-I	1384 mm	1391 mm	508 mm	514 mm
GRSB-60-F/GRSBF-60-F	1537 mm	1543 mm	406 mm	413 mm
GRSB-60-I/GRSBF-60-I	1537 mm	1543 mm	508 mm	514 mm
GRSBF-60-S	1537 mm	1543 mm	622 mm	629 mm
GRSB-60-0/GRSBF-60-0	1537 mm	1543 mm	775 mm	781 mm
GRSB-66-I	1689 mm	1695 mm	508 mm	514 mm
GRSB-72-F/GRSBF-72-F	1842 mm	1848 mm	406 mm	413 mm
GRSB-72-I/GRSBF-72-I	1842 mm	1848 mm	508 mm	514 mm
GRSBF-72-S	1842 mm	1848 mm	622 mm	629 mm
GRSB-72-0/GRSBF-72-0	1842 mm	1848 mm	775 mm	781 mm

Due to our policy of continual product development and improvement, all details and specification are subject to change without notice.