



INVENTIVE SIMPLIFICATION

Project _____

Item _____

Quantity _____

Date _____

XEEC-1011-EPR

XEEC-1011-EPR

MODEL
EVEREO 600

- | | |
|--------------------------|--|
| • Food preserver | • Hinged Left (Right Hand Door) |
| • Electric | • 7" Touch control panel |
| • 10 Trays GN 1/1 | |



DESCRIPTION

Service Temperature Food Preserving is a patented technology that has been designed to preserve food at the temperature at which it is served and eaten. It means that you can cook food, keep it hot without blast freezing and regenerating it, and serve it in a few seconds at any time of the day and with zero waiting time for your customers.

With only 600 mm deep, the **EVEREO® 600** is the compact solution for quick installations in small spaces and outside the kitchen area.

The **EVEREO® 600** easily fits any business and is available with left or right door opening. The wide glass and the LED light allow maximum visibility of the products while the compact size allows you to quickly identify the products to be served without taking out the trays.

STANDARD TECHNOLOGY

AIR DISTRIBUTION IN THE PRESERVING CHAMBER:

- AIR.Maxi™ technology: airflow speed management intelligently redistributed.

TEMPERATURE CONTROL:

- Latest generation sensors allow to set up EVEREO with a certainty of a degree of precision of 0.5 °C (32,9 °F).

THERMAL INSULATION AND SAFETY

- Protek.SAFE™ technology: maximum thermal efficiency and working safety (complies with the IEC/EN60335-2-42 rule).
- Protek.SAFE™ technology: fan impeller brake to contain energy loss at door opening.
- Protek.SAFE™ technology: electrical power absorption related to the real needs.
- Protek.SAFE™ PLUS: double glazed door.

DOUBLE STACK COLUMN:

- MAXI.Link technology: allows double-stack EVEREO columns to be created.

STANDARD TECHNICAL FEATURES

- Rounded stainless steel AISI 304 cavity for hygiene and ease of cleaning.
- Cavity lighting through external LED lights.
- Light weight - heavy duty structure using innovative materials.
- Contactless contact latch.
- Self-diagnosis system for detecting problems or failures.
- Safety temperature limiter.
- Stainless steel C-shaped rackrails

APP & WEB SERVICES

- www.mealmefood.com

STANDARD PRESERVING FEATURES

SETTINGS:

- **TEMPERATURE:** 58 °C (136,4 °F) – 75 °C (167 °F).
- **AUTOMATIC PROGRAM SET:** possibility to select the food to be preserved in the pre-loaded program list and automatically regeneration time, preserving temperature and time will be set up for you.
- **TRAY ASSIGNMENT:** Possibility to assign one preserving program to a dedicated tray.
- **MULTI.TIME LIST:** technology to manage up to **06 timers** to preserve different products at the same time.
- **ROP:** Manage the programs Reorder Point (the minimum number of sous-vide single portions that must always be present in your chamber) in order to not run out during service of your best selling menu items.
- **CLIMA.Control:** Humidity or dry air set by 10%.

PROGRAMS:

- Store up to **256 users programs**.
- **PRESERVING MODE:** choose or set the program that is more suitable to preserve your food for days or weeks in sealed containers.
- **HOLDING MODE:** set your personal programs while using open containers or trays, and have your food held at the precise temperature.
- **MEALME MODE:** you will be able to use the programs to be used with the food that you have ordered by any of our MEALME approved vendors.




We reserve the right to make technical improvements - January, 2019

XEEC-1011-EPR

Views
Connection positions
Dimensions and Weights

XEEC-1011-EPR

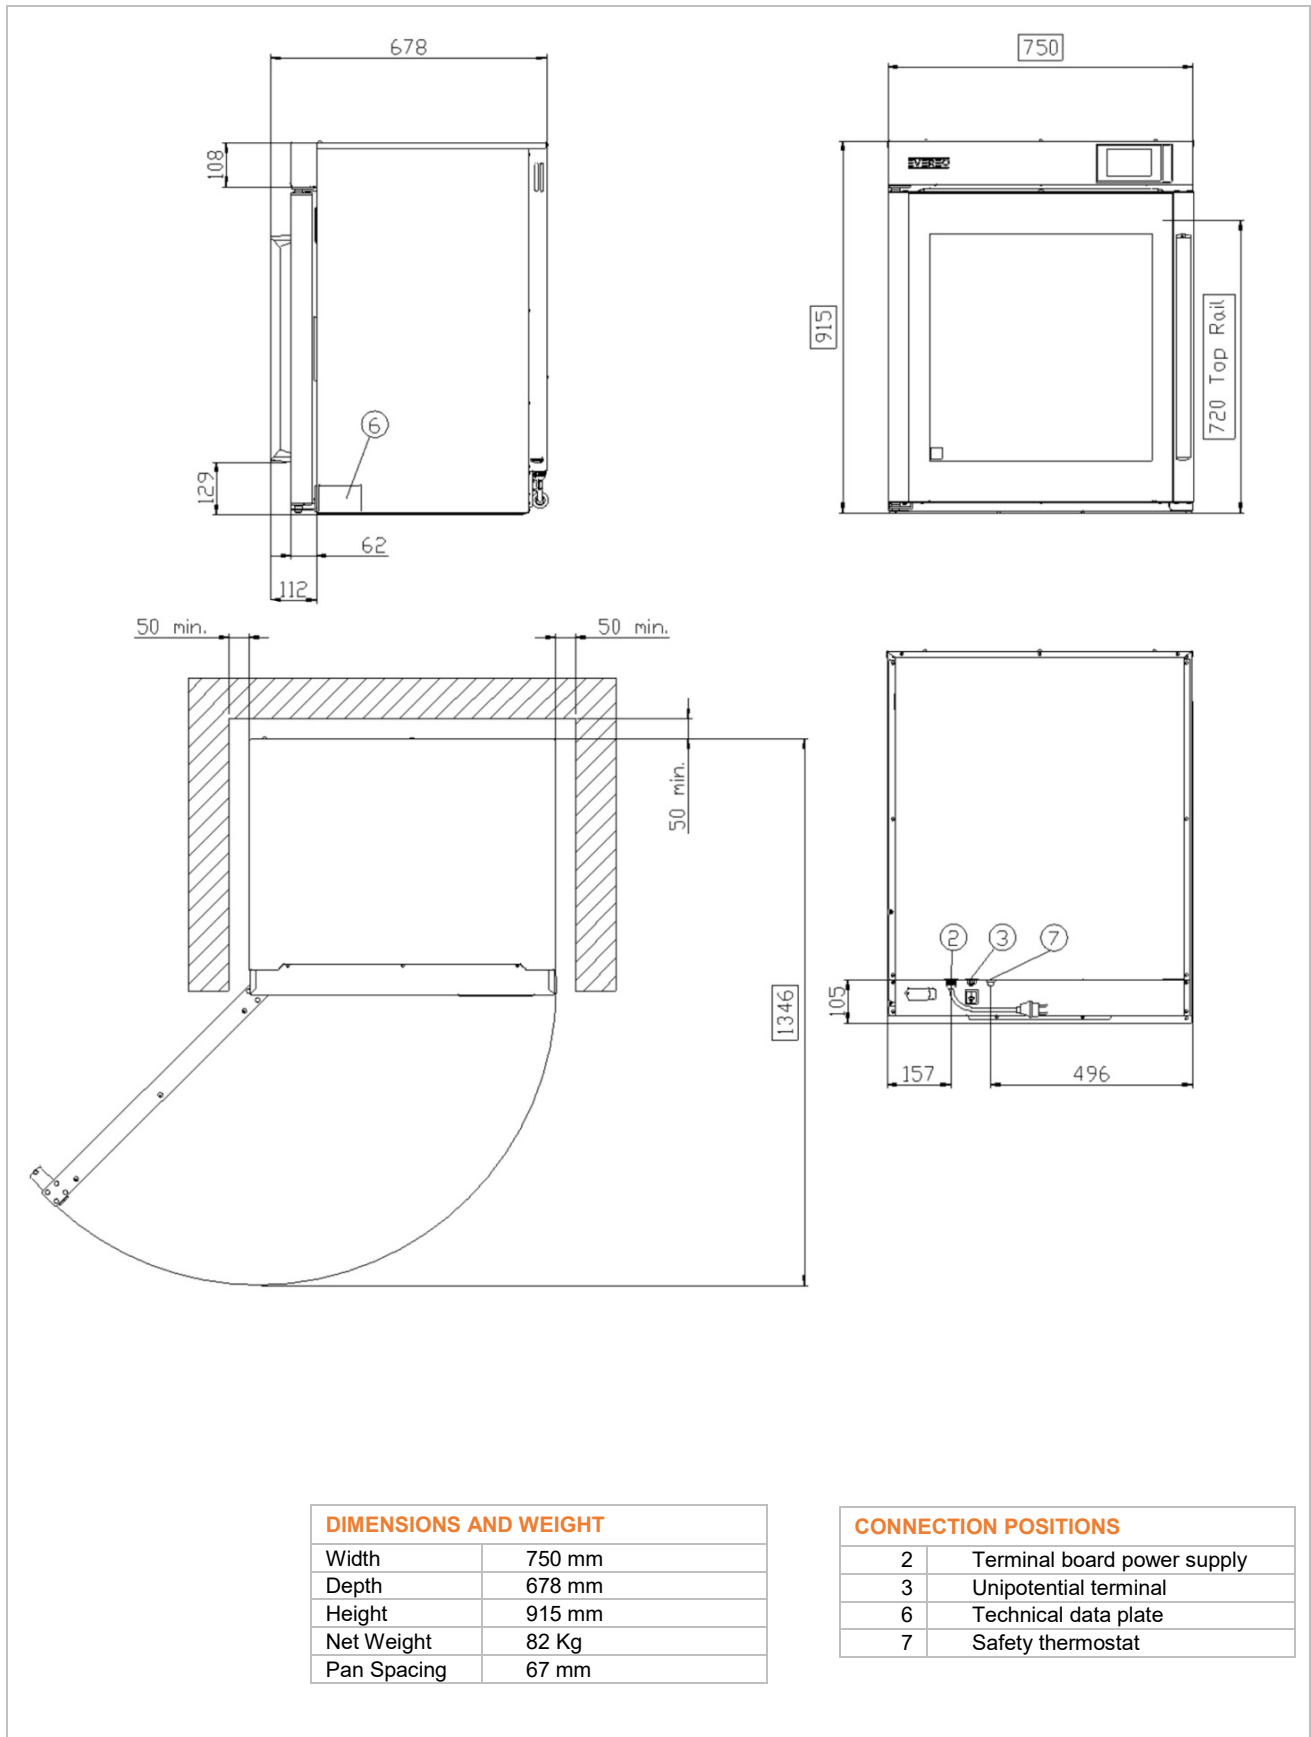

| DIMENSIONS AND WEIGHT | |
|-----------------------|--------|
| Width | 750 mm |
| Depth | 678 mm |
| Height | 915 mm |
| Net Weight | 82 Kg |
| Pan Spacing | 67 mm |

| CONNECTION POSITIONS | |
|----------------------|-----------------------------|
| 2 | Terminal board power supply |
| 3 | Unipotential terminal |
| 6 | Technical data plate |
| 7 | Safety thermostat |



INVENTIVE SIMPLIFICATION

XEEC-1011-EPR

Power supply
Water connections
Installation requirements
Accessories

XEEC-1011-EPR

POWER SUPPLY

| STANDARD | |
|-------------------------|--------------------------------|
| Voltage | 220-240 V |
| Phase | 1PH+N |
| Cycle | 50-60 Hz |
| Total power | 2.9 kW |
| Maximum Amp Draw | 14 A |
| Required breaker size * | 16 A |
| Power cable requirement | H07RN-F 3G 1.5 mm ² |
| Cord diameter | 10 mm |
| Plug | schuko |

INSTALLATION REQUIREMENTS

Installations must conform to all local electrical systems, specifically minimum wire gauge required for field connection, hydraulic and ventilation codes.



WA DEALER

Practical Products Pty Ltd

Ph: 08 9302 1299

51 Paramount Drive Wangara WA 6065

sales@practicalproducts.com.au

www.practicalproducts.com.au

ACCESSORIES

- **PRESERVING ESSENTIALS:** Special trays.
- **FLOOR STAND**
- **HIGH STAND**
- **FEET KIT**
- **Wi/Fi** Connection board to keep the oven connected to UNOX cloud mandatory to extend warranty.
- **SPRAY & RINSE:** detergent with natural ingredient.

Register to access data and product specifications
infonet.unox.com

