



VCR2 - REAR ENGINE

Double Drawer


Product Information:

- Modular refrigerated drawer system, providing bulk storage in a range of different configurations for extreme versatility (can be configured as a worktop or undercounter system)
- Energy efficient, insulated containers adopt 'hold the cold' technology when drawer is opened
- Low velocity cooling ensures stable temperatures and exceptional humidity control, prolonging shelf life by preventing food dehydration
- Precise temperature control in 1°C increments with adjustable digital temperature controller (15°C - -22°C)
- Designed to operate in ambient temperatures up to 40°C
- External drawer runners for hygiene and ease of cleaning
- Low maintenance internal condenser
- **Must** be installed level with a 5mm fall to the rear
- **24 month parts and labour warranty, extended 5 year warranty available upon registration**

NOTE: Adande units are not designed for use as a servery cabinet with multiple drawer openings and scooping of products such as: Ice-cream/ Sorbet/ Gelato and or frozen berries.

Extended drawer openings will result in decreased efficiency of the refrigeration system and may lead to temperature uncertainty.


For optimal energy efficiency and temperature stability the drawers should always be closed firmly and as quickly as possible during use.

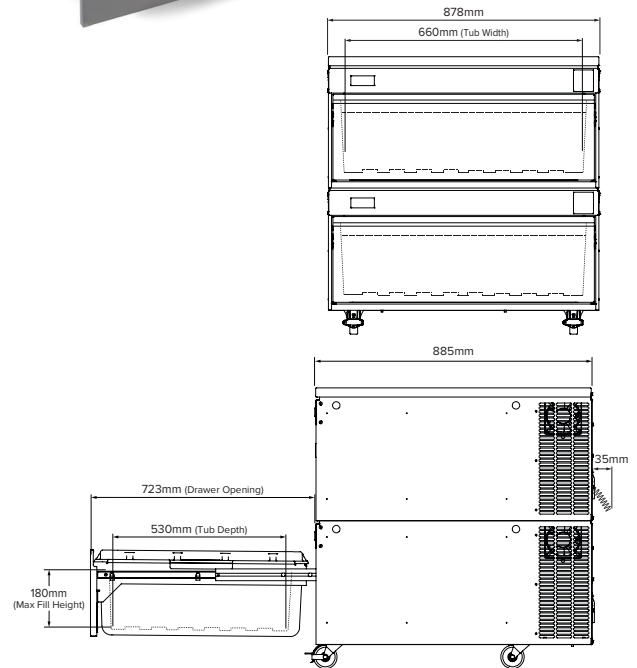


Configurations:

Models	Base Configuration	Top Configuration	W x D x H (mm)	Weight	Max Loading Weight	Packed Dimensions (mm)	Packed Weight
VCR2.PT	Plinth Base	Cover Top	878 x 885 x 815	145 kg	0 kg	998 x 955 x 1030	182 kg
VCR2.RT	Rollers	Cover Top	878 x 885 x 846	146 kg	0 kg	998 x 955 x 1061	183 kg
VCR2.RW	Rollers	Solid Work Top	878 x 885 x 854	154 kg	285 kg	998 x 955 x 1069	191 kg
VCR2.RHS	Rollers	Heatshield Top	878 x 885 x 895	165 kg	285 kg	998 x 955 x 1110	201 kg
VCR2.CT	Standard Castor	Cover Top	878 x 885 x 888	147 kg	0 kg	998 x 955 x 1103	181 kg
VCR2.CW	Standard Castor	Solid Work Top	878 x 885 x 900	155 kg	230 kg	998 x 955 x 1115	191 kg

Base Options:



Top Options:



***INSTALLATION NOTE:** Plinth mounted VCR units cannot be installed flush against the back wall & right hand side wall simultaneously. There must be 50mm clearance to one of these sides for ventilation.

***INSTALLATION NOTE:** Hard-wired, gas and plumbed equipment **cannot** be directly installed onto the Adande unit. This equipment must be installed above the Adande unit using an independent equipment stand. Installation must be non-fixed to allow service access.

Due to continuous product research and development, the information contained herein is subject to change without notice.

General Specifications:

Capacity	86 Litres (per drawer) 8 x 100mm deep 1/1 GN pans 12 x 65mm deep 1/1 GN pans	
Natural Refrigerant	R600a	
Climate Class	4	
Heat Rejection	1.17 kW	
Db Rating	50.6 - 54.2	
Total Power	230VAC / 50Hz / 0.58kW 10A plug & lead	
	Chiller	Freezer
Energy Usage kW/24hrs	1.68 kW	4.18 kW
Running Current	2.4A	1.4A

WA DEALER
PRACTICAL PRODUCTS PTY LTD

PH: 08 9302 1299
51 Paramount Dr Wangara WA 6065
sales@practicalproducts.com.au
www.practicalproducts.com.au