



CB1565A



Self-contained ice maker - Sprayer system Daily production up to 158 kg

Brema's CB range offers self-contained ice machines for bench top, under bench or free-standing installation. These machines produce attractive, crystalline cubes weighing 13g which rapidly chill and enhance the appearance of any beverage.

The Brema CB1565A is a free-standing ice cube machine that produces 155kg of ice per 24 hours and has storage capacity of 65kg.

The CB range of self-contained ice cube machines is the perfect fit for cafes, restaurants, hotels, bars and nightclubs.

Features

- Compact and crystal cube
- AISI 304 SS Scotch Brite finish
- Tropical class +43°C rated
- Cleanable antiscale filter
- Air cooling system
- Easy cleanable internal rounded surfaces HCFC-Free insulated storage
- RoHS Free
- Disappearing insulated door
- Electromechanical operation
- ON-OFF rocker switch
- Standard and special voltages
- 65kg storage capacity
- Produces 13g cubes













Accessories

- Water inlet hose
- Drainage hose
- External water filter
- Pressure limiting valve Plastic ice scoop
- Adjustable stainless steel legs (4)





AISI 304 SS Scotch Brite finish



Adjustable Stainless Steel feet




Easy cleanable internal rounded surfaces



Disappearing insulated door

Ice cube size



Production 24h

Air temp.	Water temp.	kg
10° C	7° C	158
21° C	15° C	155
220 C	210 C	122

3 Years Warranty

Certifications available for this model
























CB1565A



Self-contained ice maker - Sprayer system Daily production up to 158 kg

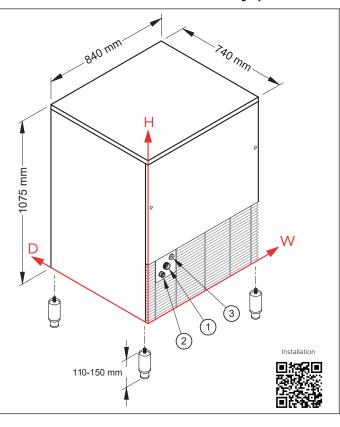

Working conditions

Location: Indoor

	Min	Max
Ambient temperature	+10°C	+43°C
Water temperature	+3°C	+32°C
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

WA DEALER PRACTICAL PRODUCTS PTY LTD

PH: 08 9302 1299 51 Paramount Dr Wangara WA 6065 sales@practicalproducts.com.au www.practicalproducts.com.au

Connections

All measures are referred to the rear bottom-left corner (W-H-Ø)

- (1) Water in.: 141mm 290mm 3/4" (2) Water out.: 79mm 245mm 24mm
- (3) Electrical connections.: 186mm 326mm

Technical Information

Production in 24h	155kg	
Store capacity, up to	65kg	
Cooling system	А	
Kind of cube (standard)	D-13g	
Kind of cube (non-stock)	A-18g, C-33g, E-42g, B-60g	
Refrigerant	R452A	
Standard voltage	240V ~ 50 Hz - 15A (lead with plug supplied)	
Energy consumption	1400W	
Fuse	16A	

All the technical information need to be considered at the following conditions: Sizes without feet

Standard Cube (13 g)

Ambient temperature +21°C Water temperature +15°C

Average power consumption at +43°C (standard voltage)

Clearance 100mm sides + back Water consumption A: 2.6l/kg Sizes (W-D-H) 840 - 740 - 1075 Sizes with pack (W-D-H) 880 - 785 - 1245 Net weight 118kg Gross weight 138kg	Finish	AISI 304 stainless steel	
Sizes (W-D-H) 840 - 740 - 1075 Sizes with pack (W-D-H) 880 - 785 - 1245 Net weight 118kg	Clearance	100mm sides + back	
Sizes with pack (W-D-H) 880 - 785 - 1245 Net weight 118kg	Water consumption	A: 2.6I/kg	
Net weight 118kg	Sizes (W-D-H)	840 - 740 - 1075	
	Sizes with pack (W-D-H)	880 - 785 - 1245	
Gross weight 138kg	Net weight	118kg	
	Gross weight	138kg	

Models and specifications are subject to change without notice