

CW3H

1800mm 3 Hole Gas Waterless Woks

CW3H-CCC 3 Hole, 3 Chimney Burners

CW3H-CCD 3 Hole, 2 Chimney Burners, 1 Duckbill Burner

CW3H-CDD 3 Hole, 1 Chimney Burner, 2 Duckbill Burners

CW3H-DDD 3 Hole, 3 Duckbill Burners



CW3H

- 800mm compact depth
- Cobra suite matching
- Waterless wok deck
- 14" wok hole
- Duckbill and Chimney burner model options
- 105 MJ/hr 18 jet Duckbill burners¹
- 95 MJ/hr 24 jet Chimney burners
- High splashback with shelf
- Water folding laundry arm on splashback
- Rear waste channel
- Stainless steel spill tray
- Lift out wok ring
- Flame failure protection with pilot burner

Also Available



CW1H



CW2H



Duckbill burner



Chimney burner

OVERALL CONSTRUCTION

- Full chassis construction
- Double skin insulated wok deck
- Stainless steel exterior finish
- Heavy-duty cast iron wok rings (removable)
- Stainless steel spill tray
- 63mm dia. stainless steel legs with adjustable feet

CONTROLS

- Pilot On/Off control with flame failure valve
- Main burner On/Off valve with High-Low burner adjustment
- Quarter turn main burner control handles
- Quarter turn water valve handle

CLEANING AND SERVICING

- Stainless steel exterior finish
- Lift out wok rings for full cleaning ability
- Slide out spill tray
- Rear waste channel with removable grate for debris collection
- Access to all parts from front and top for servicing

¹ NZ models Duckbill burner rating 105MJ/hr Natural Gas / 85MJ/hr on LP gas.

Matching Products



CSP6

CN4

CT9

CP4

CS9 / C900-S

C6B

CR9D

CR6C

CF4

C9C

CW3H


1800mm 3 Hole Gas Waterless Woks

CW3H-CCC 3 Hole, 3 Chimney Burners

CW3H-CCD 3 Hole, 2 Chimney Burners, 1 Duckbill Burner

CW3H-CDD 3 Hole, 1 Chimney Burner, 2 Duckbill Burners

CW3H-DDD 3 Hole, 3 Duckbill Burners

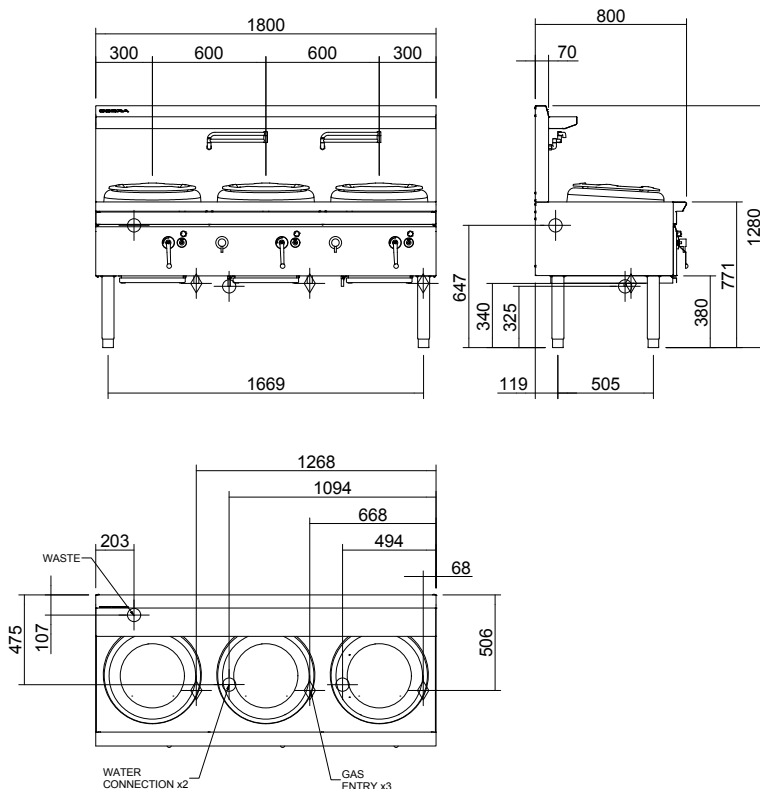

CW3H

SPECIFICATIONS

Burners

95MJ/hr 24 jet Chimney burner
105MJ/hr 18 jet Duckbill burner
(NZ - LP gas rating 85 MJ/hr)

Gas Rating - Total

CW3H-CCC 285 MJ/hr
CW3H-CCD 295 MJ/hr
(NZ- LP gas rating 275 MJ/hr)
CW3H-CDD 305 MJ/hr
(NZ- LP gas rating 265 MJ/hr)
CW3H-DDD 315 MJ/hr
(NZ- LP gas rating 255 MJ/hr)

Wok size

14" wok ring
Suits woks 40-60cm / 16-24"

Gas connection (x3)

Separate gas connection for each wok hole. R3/4 (BSP) male each wok hole 506mm from rear, 340mm from floor, 68mm, 668mm and 1268mm from RH side

All units supplied with Natural-LP gas regulators for each wok connection

Supplied gas regulators include Test Point for appliance operating pressure
Supplied regulator(s) must be fitted to each appliance gas connection when installed

Water connection (x2)

Cold water connection
2 x 1/2" O.D. copper tube
475mm from rear, 325mm from floor, 494mm and 1094mm from RH side

Drain connection

Connection to waste drain 1-1/4" BSP drain waste
107mm from rear, 647mm from floor, 203mm from LH side

Dimensions

Width 1800mm
Depth 800mm
Height 771mm
Incl. splashback 1280mm
Nett weight 194kg

Packing data

2.19m3, 294kg
Width 1835mm
Depth 865mm
Height 1382mm

Gas types

Available in Natural gas and LP gas, please specify when ordering



Cert. No. AGA 8593G

WA DEALER
PRACTICAL PRODUCTS PTY LTD

PH: 08 9302 1299
51 Paramount Dr Wangara WA 6065
sales@practicalproducts.com.au
www.practicalproducts.com.au