


CURVED - CC5

COSSIGA




Chilled

CC5RF6
CC5RF9
CC5RF12
CC5RF15

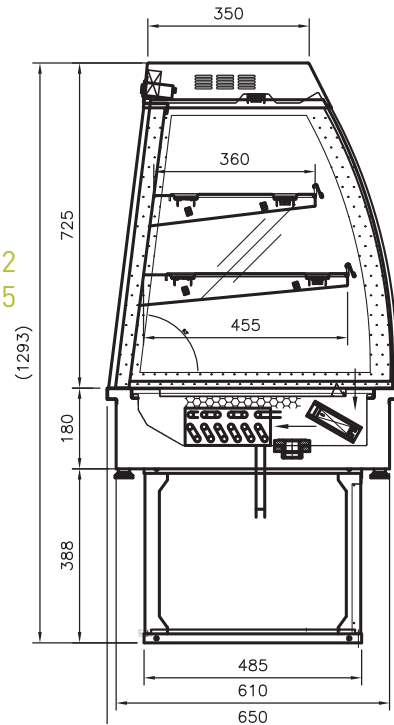


Deck forced Refrigeration
Sliding Doors Front and Rear
Double Glazed
Two adjustable shelves
Ticket strips on shelves and deck
Undershelf and canopy LED lights
Integral condensor
Self evaporating
Solid glass front available

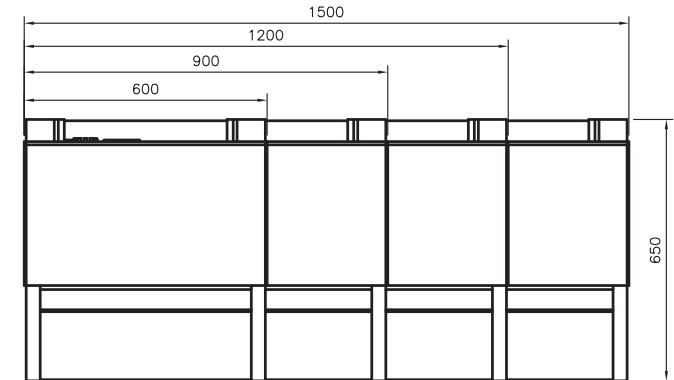


Heated

CC5HT6
CC5HT9
CC5HT12

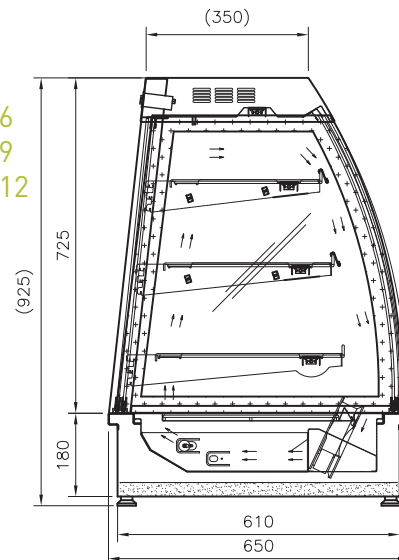


Sliding doors front and rear
Single glazed
Three adjustable shelves
Ticket strips on shelves and deck
Undershelf and canopy LED lights
Solid glass front available

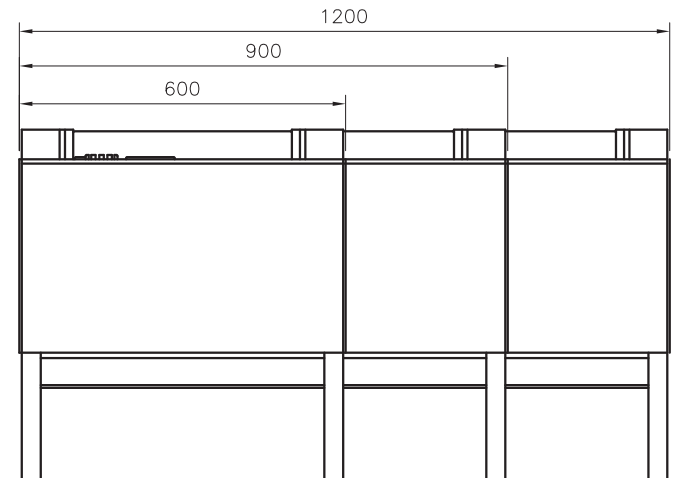




Bain Marie

CC5BM9
CC5BM12
CC5BM15

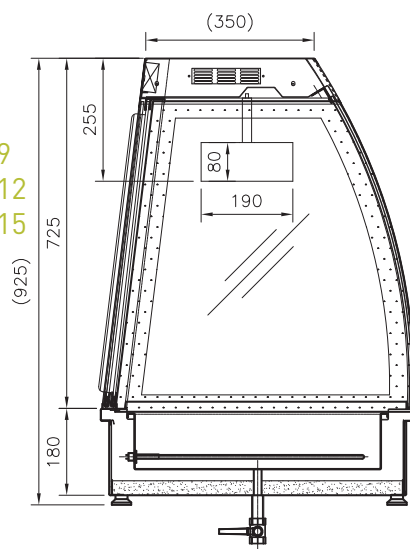


Sliding Doors Front and Rear
Overhead halogen lights
Wet/dry element in base
Single glazed glass
Solid glass front available

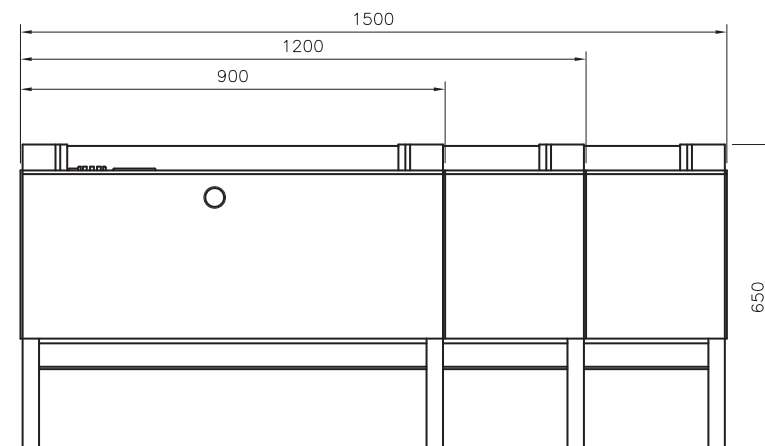


Ambient

CC5AB6
CC5AB9
CC5AB12

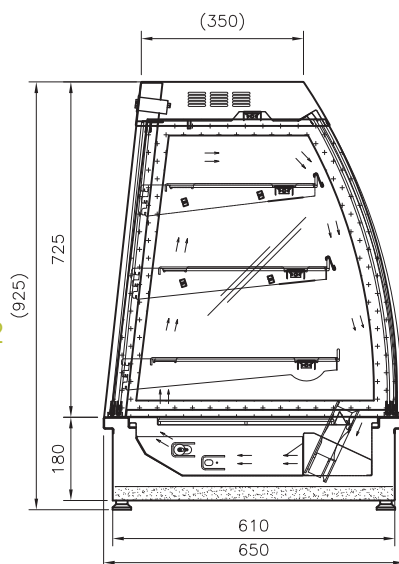

Sliding doors front and rear
Single glazed
Three adjustable shelves
Ticket strips on shelves and deck
Undershelf and canopy LED lights
Solid glass front available
Ambient converted from heated
Air removal fan installed in ceiling

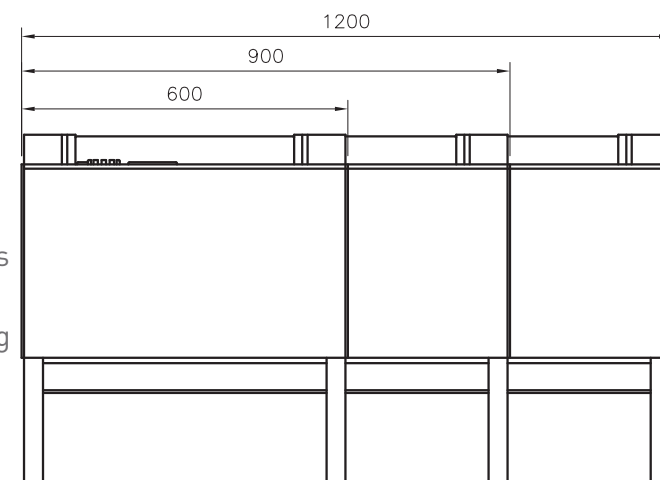


CURVED - CC5 Dimensions

coSSiga

CABINET DIMENSIONS & SPECIFICATIONS



[illegible]

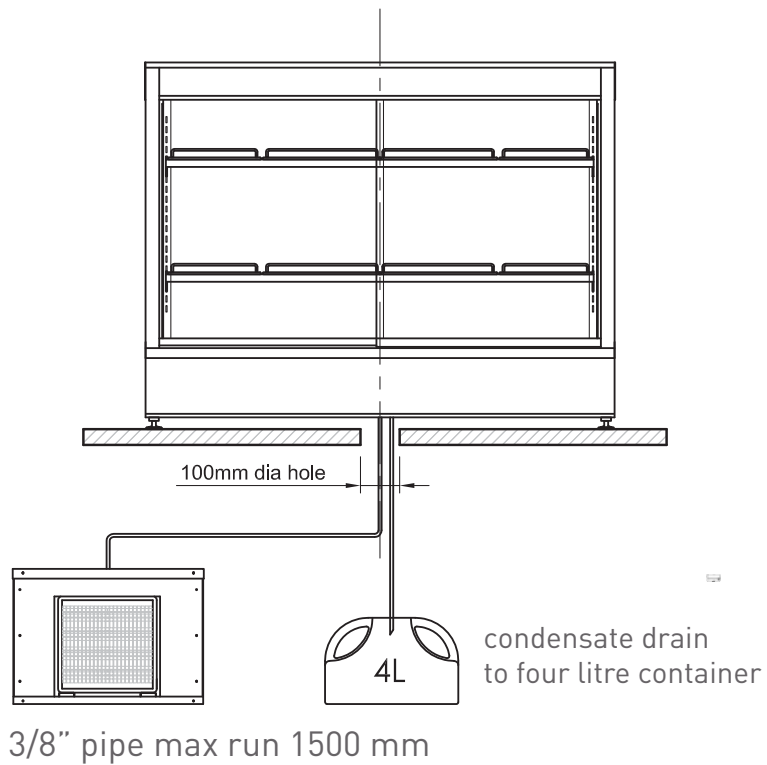

Vertical pipe runs are not recommended


Pipe runs over 150mm :

- Expansion valve will need to be fitted
- Correctly sized condensing unit fitted
- Correct pipe size determined

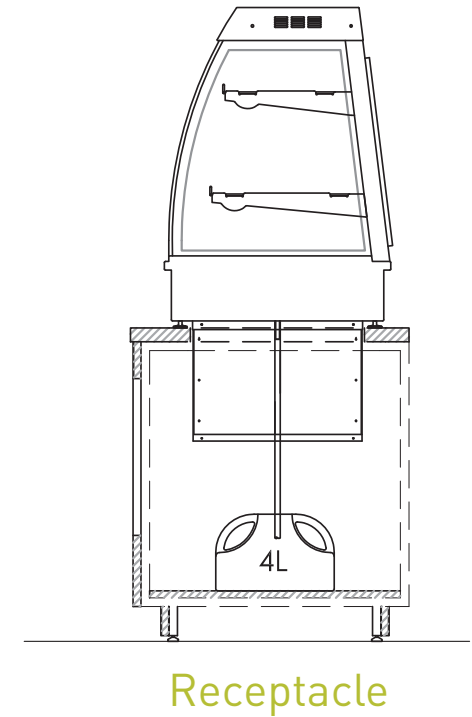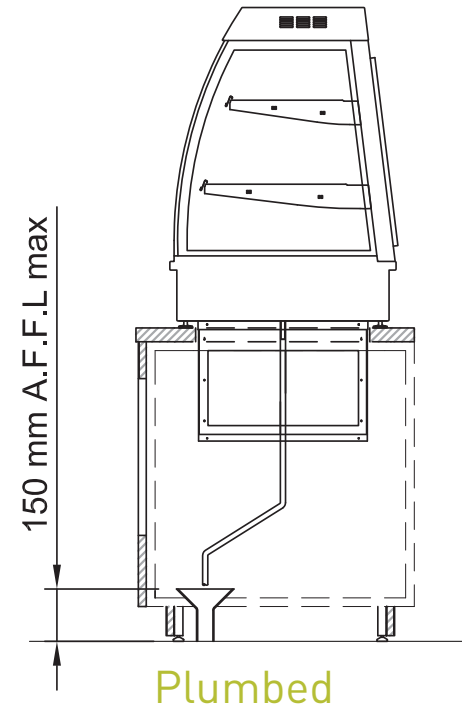


Units are self evaporating to a receptacle in the condensor unit
In areas of high humidity units should be plumbed directly to a waste.

- Maximum 150mm above finished floor level
- Drainage to building waste
- Building waste by client
- Receptacle placed under unit
- Dispose of water daily

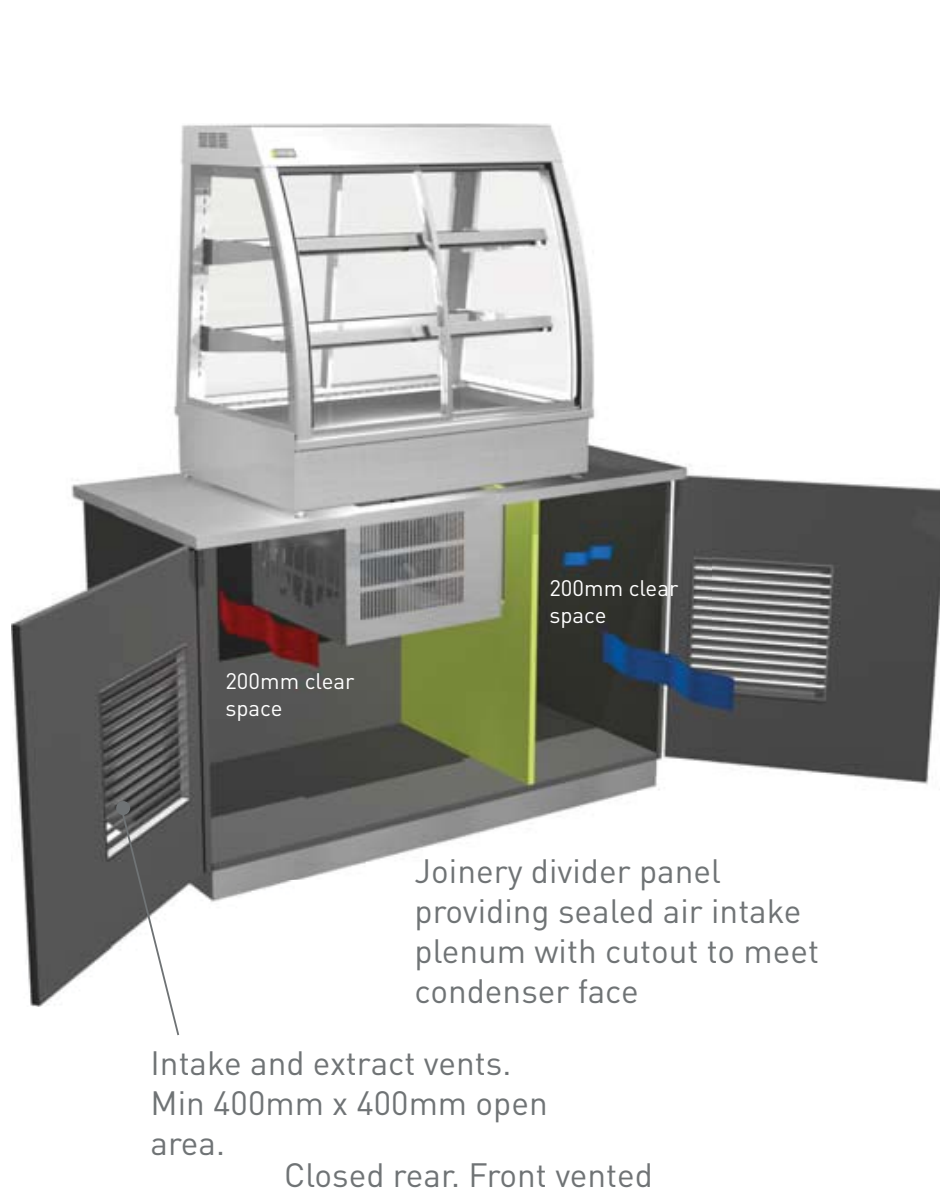



Front Vented

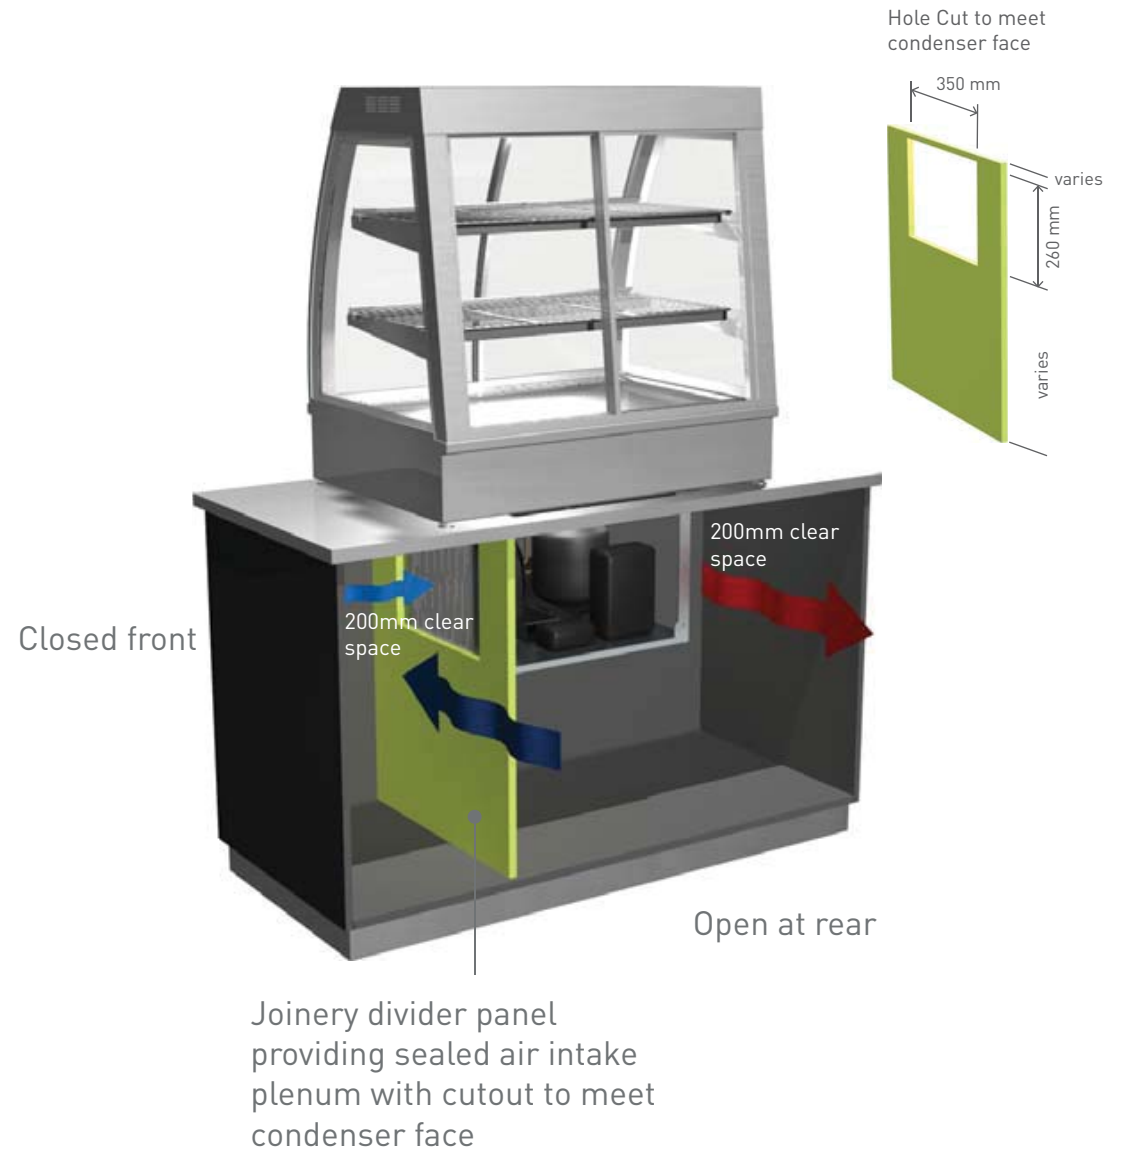

Rear Vented


CURVED - CC5 DROP IN COUNTER TOP CUT OUT DETAILS

COSSIGA

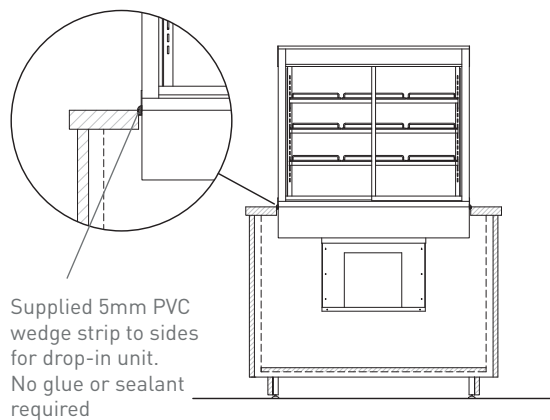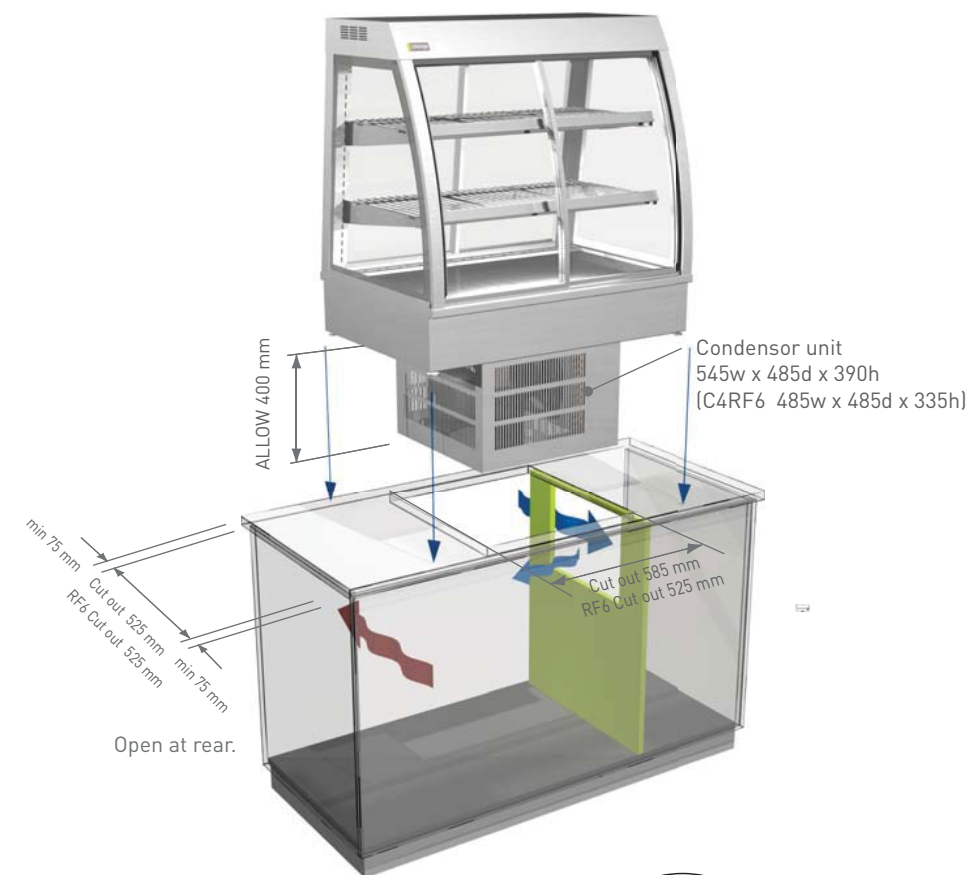


Remove feet for all
drop-in installations

Supplied 5mm PVC
wedge strip to sides
for drop-in unit

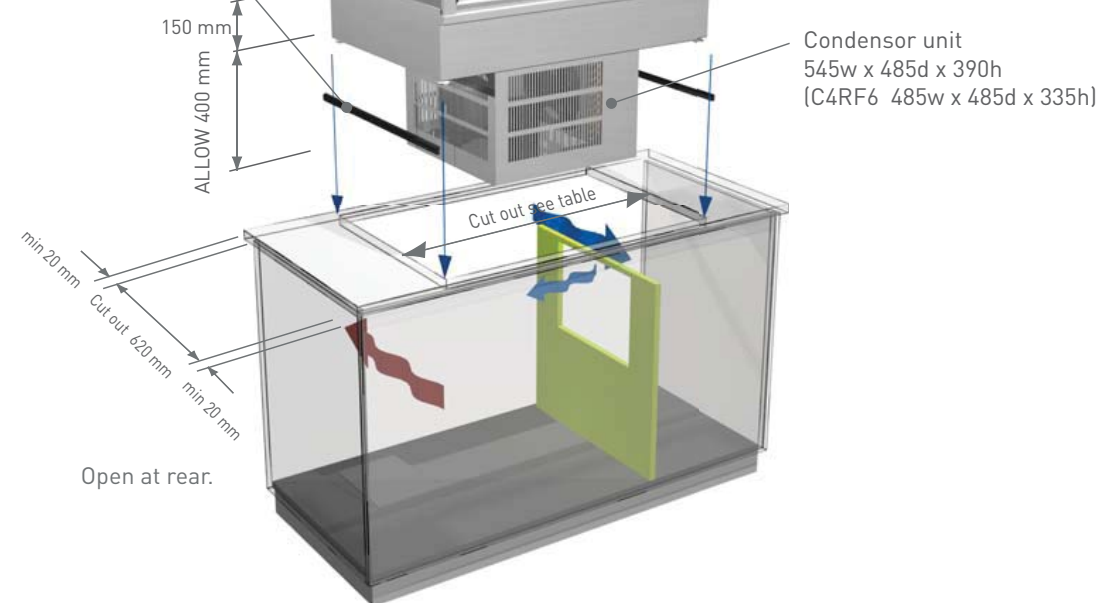

CURVED - CC5 JOINERY TO REAR WALL WITH VENT

coSSiga

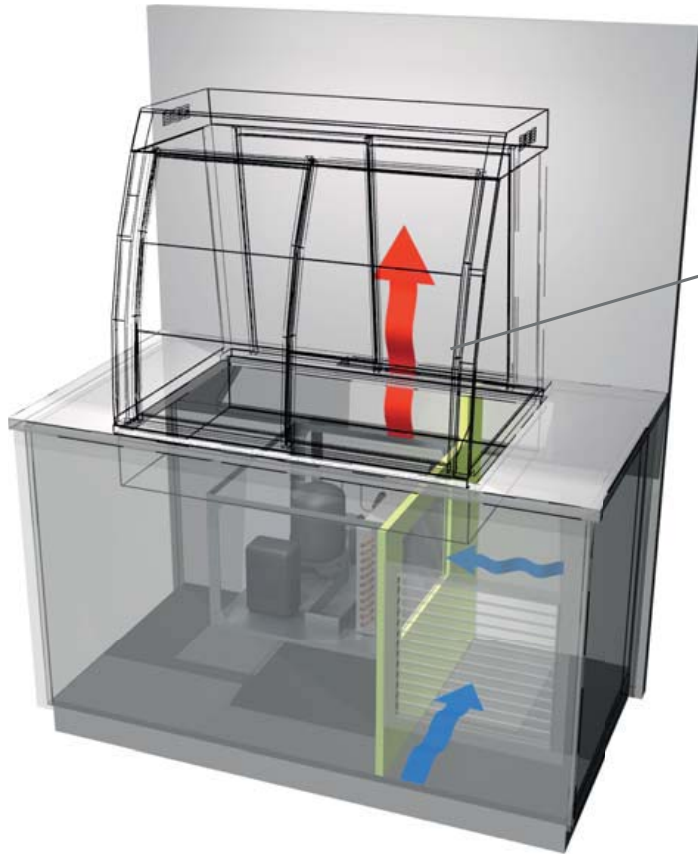


Horizontal vent in cabinet top for hot air extract

Electric biscuit fans can also be fitted to provide mechanical extract

Ambient air ducted in to compressor face through air plenum space

Joinery divider panel providing sealed air intake plenum with cut out to meet condensor face

Allow access for cleaning, servicing and waste evaporator water removal

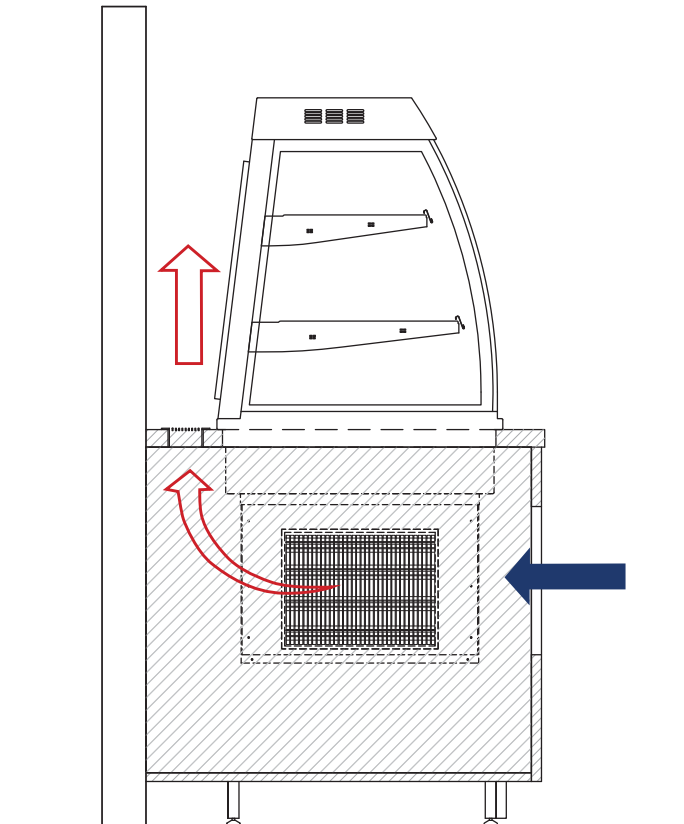


Ambient air is drawn into front vented area


Hot air must escape joinery cabinet

A horizontal vent should be used behind the unit

Vent must be at least 100mm deep and as wide as unit

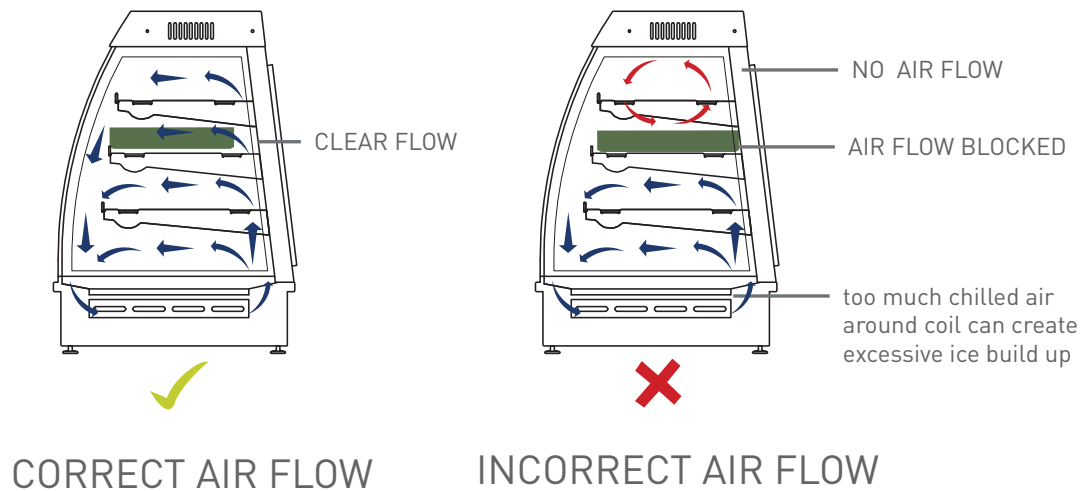

Blocked air flow will retard operation on both HOT and COLD units
Ensure trays or plates are not blocking air flow at rear

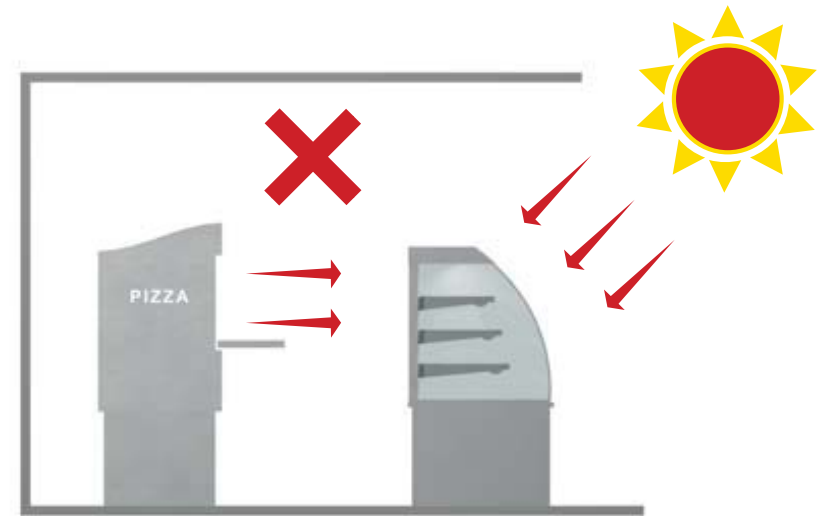

Heat from other equipment and natural conditions can cause cooling failures and overheating of compressors

Locations to avoid are :

- Close to shop front exterior
- In an outside location
- In direct sunlight
- In a high cross wind area
- Near any source producing excessive heat
- Service units more frequently in dusty or polluted areas

Top Mounted Controller Panel

For against wall installations
Sold individually




Price Tabs

Stainless Steel
Write on with marker or adhesive tape
Measure 60mm x 30mm
Sold in packs of 20



Ventilation Grill

Stainless Steel
Sold individually



Base Tray - Heated Units

Stainless Steel
For heated units
Sold in pairs




Tong Holder

Stainless Steel
Drop into counter tray race
Sold individually



Bag Holder

Stainless Steel
Drop into counter tray race
Sold individually



Humidity Dish


Stainless Steel
Perforated lid is removable



Spacers for Counter



- Allows units to be butted together to create a continuous look
- Clear polycarbonate with polished edges
- Available for bench tops and drop in

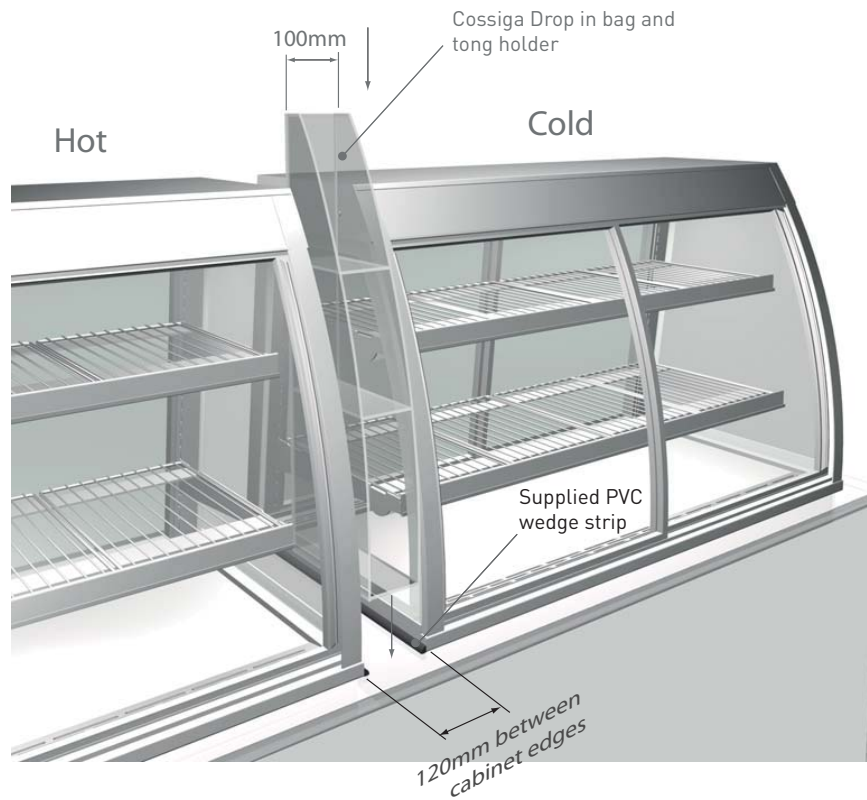

Tong and Bag



- Provides a continuous look with storage for paper bags and tongs
- Insulates when placing chilled next to heated units
- Clear polycarbonate with polished edges

Gastro Norm System

Stainless Steel Construction
Angled display view



GASTRO NORM				
MODEL	CODE	QUANTITY	DIMENSIONS	PAN DEPTH
CC5HT6	F92-315	2 Per Unit	265MM X 325MM PANS AND FRAME	65MM
CC5HT9	F92-316	3 Per Unit	265MM X 325MM PANS AND FRAME	65MM
CC5HT12	F92-317	4 Per Unit	265MM X 325MM PANS AND FRAME	65MM

Pie Trays







Stainless Steel Construction
Placed on shelves for heated food items



PIE TRAYS							
MODEL	CODE	QUANTITY	1ST SHELF DEPTH	2ND SHELF DEPTH	3RD SHELF DEPTH	TOTAL	SHELF WIDTH
CC5HT6	AA16015	4 Per Shelf	325MM	365MM	395MM	12 Trays	120MM
CC5HT9	AA16016	6 Per Shelf	325MM	365MM	395MM	18 Trays	130MM
CC5HT12	AA16017	9 Per Shelf	325MM	365MM	395MM	27 Trays	120MM







DECAL OPTIONS

coSSiga

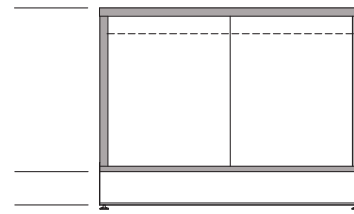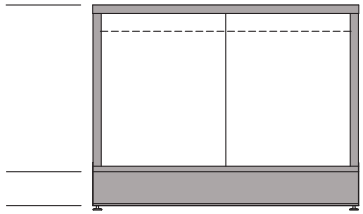


COUNTER TOP MODEL - CURVED OR SQUARE
ALL EXTERIOR VISIBLE AREAS COVERED

DROP IN COUNTER TOP MODEL - CURVED OR SQUARE -
ALL EXTERIOR TOP VISIBLE AREAS COVERED

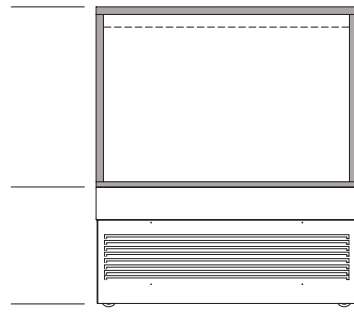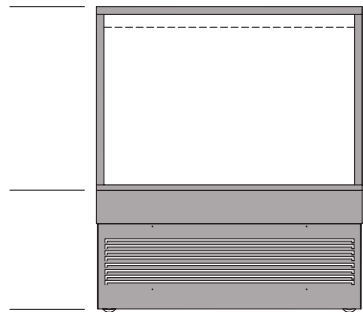

FREE STANDING - CURVED OR SQUARE
ALL EXTERIOR VISIBLE AREAS COVERED

FREE STANDING BEHIND NIB WALL - CURVED OR SQUARE
ALL EXTERIOR TOP VISIBLE AREAS COVERED

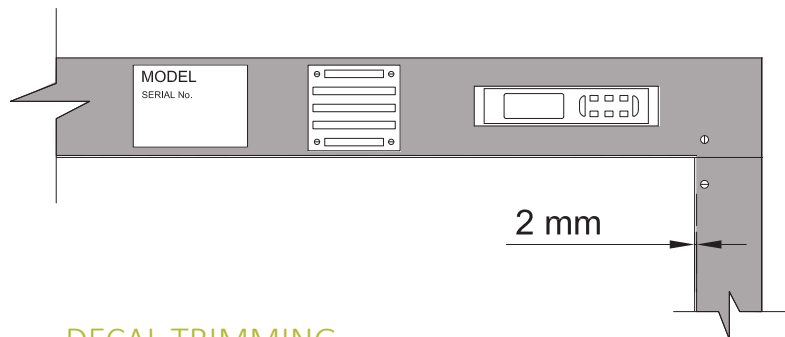

DECAL TRIMMING

- 2mm gap left around rear frame
- Rear of units cut around serial number plate, exhaust fan and controller

WA DEALER
PRACTICAL PRODUCTS PTY LTD

PH: 08 9302 1299
51 Paramount Dr Wangara WA 6065
sales@practicalproducts.com.au
www.practicalproducts.com.au