



PRODUCT FEATURES

- Open front 1500mm high
- Individual shelf heating
- Four Adjustable shelves
- Deck forced heating
- Single glazed
- Hinged rear door
- Ticket strips on shelves and base
- Under shelf and canopy LED lights

CABINET DIMENSIONS & SPECIFICATIONS

Heated 75° factory set point

Model	Cabinet			Shelving no.	SHELVES SIZE				Total food units	Display m2
	Length mm	Depth mm	Height mm		TOP	2ND	3RD	4TH		
TTGOH6	600	750	1500	4+BASE	490X255	490X335	490X415	490X415	548X595	95





Prior to installation see, installation guidelines, ventilation requirements and drainage options documents

Operating Current	Connection	Voltage
		50/60 Hertz
9.3 Amp	10amp 3 pin plug	240V

ELECTRICAL POWER

Electrical power cord 2200mm
3 pin 10 amp 1 phase socket required.

Maximum shelf load weight 15kg
spread evenly

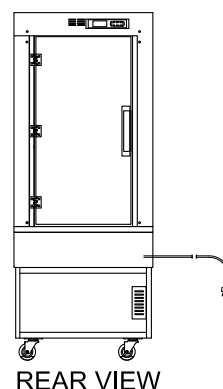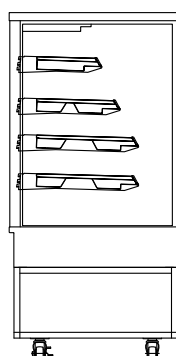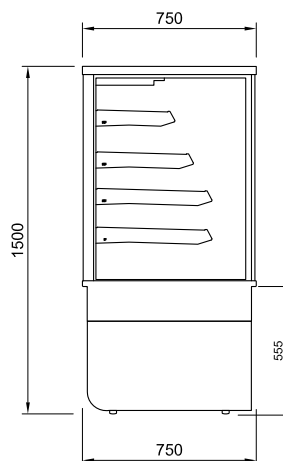

REAR VIEW



PRODUCT FEATURES

- Open front 1500mm high
- Individual shelf heating
- Four Adjustable shelves
- Deck forced heating
- Single glazed
- Sliding rear doors
- Ticket strips on shelves and base
- Under shelf and canopy LED lights

CABINET DIMENSIONS & SPECIFICATIONS

Heated 75° factory set point

Model	Cabinet			Shelving no.	SHELVES SIZE				Total food units	Display m2
	Length mm	Depth mm	Height mm		TOP	2ND	3RD	4TH	BASE(WXD)	
TTGOH9	900	750	1500	4+BASE	790X255	790X335	790X415	790X415	848X595	136






Prior to installation see, installation guidelines, ventilation requirements and drainage options documents

Operating Current	Connection	Voltage
		50/60 Hertz
14.6 Amp	20 lead only	240V

ELECTRICAL POWER

Electrical power cord 2200mm
20 amp 1 phase hard wired to isolator.

Maximum shelf load weight 15kg
spread evenly

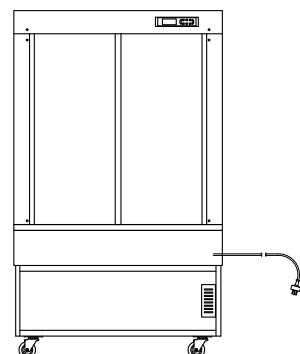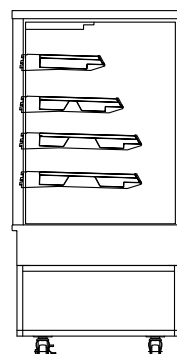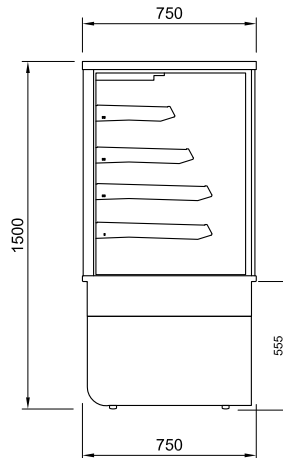

REAR VIEW



WA DEALER
PRACTICAL PRODUCTS PTY LTD

PH: 08 9302 1299
51 Paramount Dr Wangara WA 6065
sales@practicalproducts.com.au
www.practicalproducts.com.au