

TTGRF9 TOWER SERIES TALL REFRIGERATED



COSSIGA

TTGRF9




PRODUCT FEATURES

- Solid glass front
- Heated double glazed glass top, sides and front
- Heated rear sub frame
- Argon filled sliding rear doors
- Deck forced refrigeration
- Four adjustable shelves -flat or angled
- Ticket strips on shelves and base
- Under shelf and canopy LED lights
- Integral condenser
- 1500 mm high

Front doors not available for this model

Maximum shelf load weight 15kg spread evenly
All units rear venting

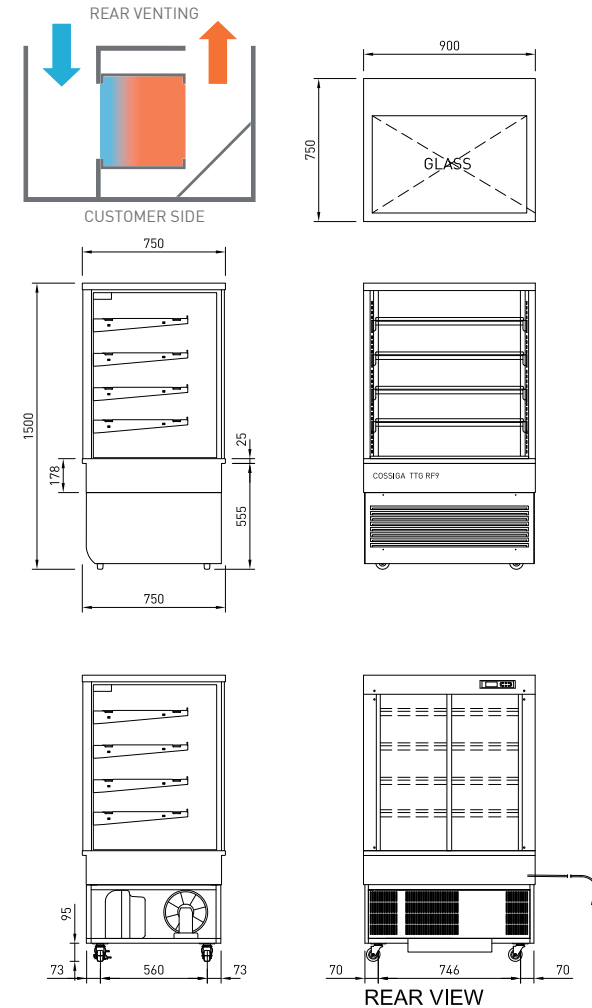

CABINET DIMENSIONS & SPECIFICATIONS

Prior to installation see, installation guidelines, ventilation requirements and drainage options documents

MODEL	CABINET			SHELVING WEIGHT KG	SHELVING 4 + BASE	OPERATING TEMP DEG C	SHELF W X D		TOTAL FOOD 100MM UNITS	DISPLAY M ²	INTERNAL VOLUME M ³	FREQUENCY	REFRIGERANT	POWER		CONNECTION ELECTRICAL POWER CORD 2200MM		VOLTAGE	PACKED FOR SHIPPING			
	LENGTH [MM]	DEPTH [MM]	HEIGHT [MM]				W X D	W X D						KWH	AMP	NZ/AUS 10 AMP	UK 13 AMP		LENGTH [MM]	DEPTH [MM]	HEIGHT [MM]	WEIGHT
TTGRF9	900	750	1500	246	4 + BASE	3-5	790 X 445	845 x515	168	1.84	0.52	50/60 HZ	R290	1.38	6.0	3 PIN PLUG	3 PIN PLUG	220-240V	1000	830	1670	252



TTGRF12 TOWER SERIES TALL REFRIGERATED



COSSIGA


TTGRF12



PRODUCT FEATURES

- Solid glass front
 - Heated double glazed glass top, sides and front
 - Heated rear sub frame
 - Argon filled sliding rear doors
 - Deck forced refrigeration
 - Four adjustable shelves -flat or angled
 - Ticket strips on shelves and base
 - Under shelf and canopy LED lights
 - Integral condenser
 - 1500 mm high
- Front doors not available for this model

Maximum shelf load weight 15kg spread evenly
All units rear venting

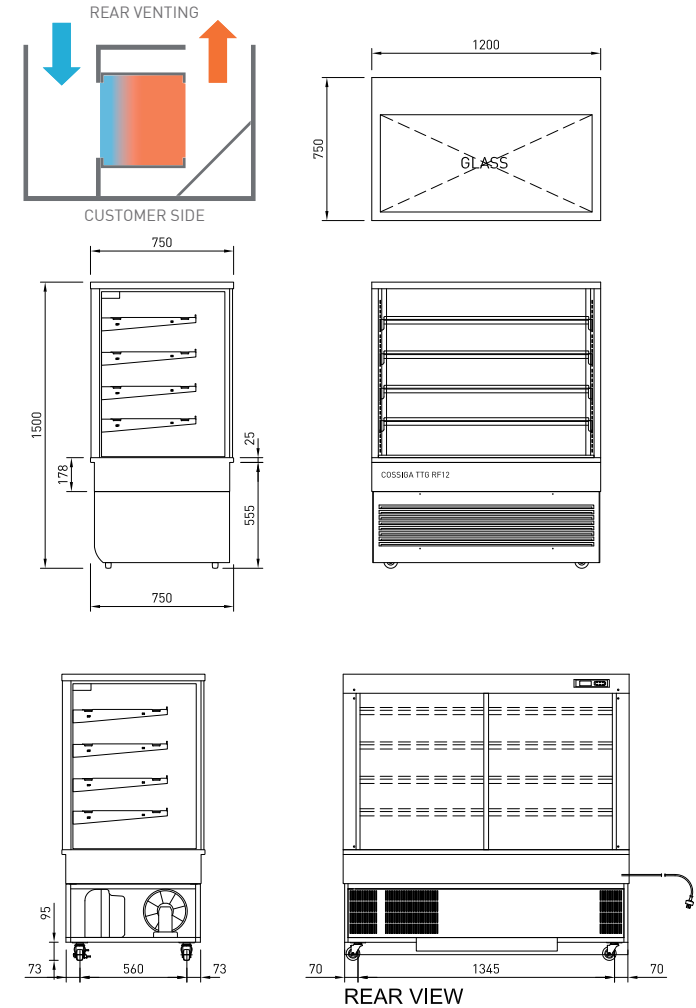

WA DEALER
PRACTICAL PRODUCTS PTY LTD

PH: 08 9302 1299
51 Paramount Dr Wangara WA 6065
sales@practicalproducts.com.au
www.practicalproducts.com.au

CABINET DIMENSIONS & SPECIFICATIONS

Prior to installation see, installation guidelines, ventilation requirements and drainage options documents

MODEL	CABINET			SHELVING WEIGHT KG	SHELVING 4 + BASE	OPERATING TEMP DEG C	SHELF W X D	BASE TRAY W X D	TOTAL FOOD 100MM UNITS	DISPLAY M ²	INTERNAL VOLUME M ³	FREQUENCY	REFRIGERANT	POWER		CONNECTION ELECTRICAL POWER CORD 2200MM		VOLTAGE	PACKED FOR SHIPPING			
	LENGTH [MM]	DEPTH [MM]	HEIGHT [MM]											KWH	AMP	NZ/AUS 10 AMP	UK 13 AMP		LENGTH [MM]	DEPTH [MM]	HEIGHT [MM]	WEIGHT
TTGRF12	1200	750	1500	300	4 + BASE	3-5	1090 X 445	1145 X 515	275	2.52	0.69	50/60 HZ	R290	1.61	7.0	3 PIN PLUG	3 PIN PLUG	220-240V	1300	830	1670	306