



### PRODUCT FEATURES

- Open front
- Individual shelf heating
- Deck forced heating
- Single glazed
- Hinged rear door
- Ticket strips on shelves and base
- Under shelf and canopy LED lights


### CABINET DIMENSIONS & SPECIFICATIONS

Heated 75° factory set point

Model	Cabinet			Shelving no.	SHELVES SIZE				Total food units	Display m2
	Length mm	Depth mm	Height mm		TOP	2ND	3RD	BASE(WXD)	100 X 100	
BTGOH6	600	750	1380	3+BASE	490X255	490X335	490X415	548X595	50	0.81

Prior to installation see, installation guidelines, ventilation requirements and drainage options documents





Operating Current	Connection	Voltage
		50/60 Hertz
8.1 Amp	10amp 3 pin plug	240V



### ELECTRICAL POWER

Electrical power cord 2200mm  
3 pin 10 amp 1 phase socket required.

Maximum shelf load weight 15kg  
spread evenly

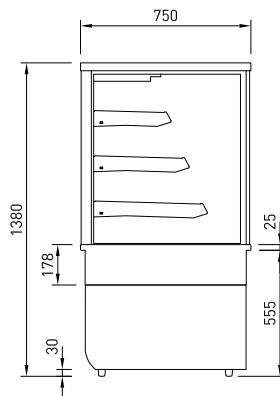

REAR VIEW



### PRODUCT FEATURES

- Open front
- Individual shelf heating
- Deck forced heating
- Single glazed
- Sliding rear doors
- Ticket strips on shelves and base
- Under shelf and canopy LED lights

### CABINET DIMENSIONS & SPECIFICATIONS

Heated 75° factory set point

Model	Cabinet			Shelving no.	SHELVES SIZE				Total food units	Display m2
	Length mm	Depth mm	Height mm		TOP	2ND	3RD	BASE(WXD)	100 X 100	
BTGOH9	900	750	1380	3+BASE	790X255	790X335	790X415	848X595	96	1.29






Prior to installation see, installation guidelines, ventilation requirements and drainage options documents

Operating Current	Connection	Voltage
		50/60 Hertz
12.6 Amp	15amp 3 pin plug	240V

### ELECTRICAL POWER

Electrical power cord 2200mm  
3 pin 15 amp 1 phase socket required.

Maximum shelf load weight 15kg  
spread evenly

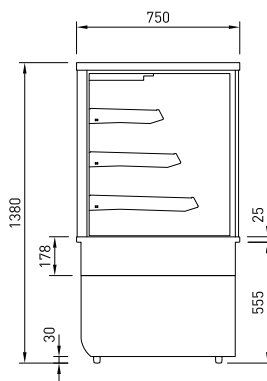

REAR VIEW

**WA DEALER**  
**PRACTICAL PRODUCTS PTY LTD**

PH: 08 9302 1299  
51 Paramount Dr Wangara WA 6065  
sales@practicalproducts.com.au  
www.practicalproducts.com.au