


Single Door Underbench Storage Refrigerators and Freezers

Features:

- Lockable door with handles
- Digital controller and digital temperature display
- Adjustable feet
- Frequency/voltage: 50Hz/220-240 V
- Plastic coated steel shelves
- Refrigerant: R134a
- Ambient temperatures +16°C to +32°C



MC200H

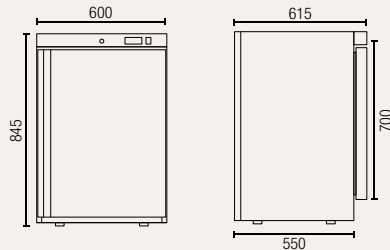


Allow min. 100mm clearance for installation, all vents must be left clear

Gross volume: 140 L
Exterior dimensions in mm: 600w x 615d x 845h
Number of adjustable shelves: 3
Cooling system: static, fan assisted
Defrost system: manual

Temperature set range: 0°C to +10°C
Gross/net weight: 55/45 kg
Door material: stainless steel
Energy consumption in 24h: 2 kWh

MC200G

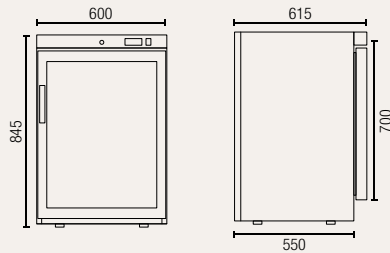

Allow min. 100mm clearance for installation, all vents must be left clear

Gross volume: 140 L
Exterior dimensions in mm: 600w x 615d x 845h
Number of adjustable shelves: 3
Cooling system: static, fan assisted
Defrost system: manual

Temperature set range: 0°C to +10°C
Gross/net weight: 55/45 kg
Door material: glass
Energy consumption in 24h: 2 kWh


MF200H



Fixed top evaporator shelf with railing guard



Sliding drawers for middle and bottom shelf

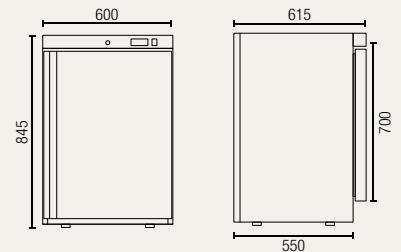

Allow min. 100mm clearance for installation, all vents must be left clear

Gross volume: 140 L
Exterior dimensions in mm: 600w x 615d x 845h
Fixed shelves: 1 + 2 sliding drawers
Cooling system: static
Defrost system: manual

Temperature set range: -10°C to -22°C
Gross/net weight: 55/45 kg
Door material: stainless steel
Energy consumption in 24h: 3 kWh

WA DEALER
PRACTICAL PRODUCTS PTY LTD
 PH: 08 9302 1299
 51 Paramount Dr Wangara WA 6065
 sales@practicalproducts.com.au
 www.practicalproducts.com.au