



FPGWORLD.COM

INLINE

3000 SERIES BAIN MARIE 1200 FREESTANDING/CURVED HEATED

RANGE	INLINE 3000 SERIES BAIN MARIE
TEMPERATURE	HEATED
MODEL	IN-3B12-CU-FF-FS
FRONT	CURVED/FIXED FRONT
INSTALLATION	FREESTANDING
HEIGHT	1261mm
WIDTH	1203mm
DEPTH	663mm

TEMPERATURE RANGE	+30°C - +110°C
RECOMMENDED CORE PRODUCT TEMPERATURE	> +65°C
ENVIRONMENTAL TEST CONDITIONS	22°C / 65% RH



FEATURES

- High energy efficiency: 1.2 kWh per hour (average)**
- Cabinet operating temperature range +30°C - +110°C
Recommended core product temperature >+65°C**

- Smart display with toughened safety glass encased in brushed stainless steel frame

Fixed Front Heated Display

- Fitted with halogen heat lamps, with 3000 hour warm white lighting
- Supplied with 3x 1/1 gastronorm dishes 65mm deep
- Extrusion at top of display area accommodates insert for branding

Operational Excellence

- Sliding doors (staff side) and fixed front (customer side)
- Constructed from stainless and mild steel with toughened safety glass and double-glazed end panels for maximum energy efficiency, climate control and durability
- Low-wattage, high-density element provides even temperature distribution
- Dry operation well only
- Fitted with adjustable 150mm legs (+30mm adjustment)



Showing : Inline 3000 Series Bain Marie heated 1200mm curved freestanding fixed front

OPTIONS & ACCESSORIES

- Add a holding shelf
- Branded decals/insert
- Rear door or end glass mirror application
- Adjustable 100mm legs (+25mm adjustment), lockable castors or unidirectional rollers
- GN pans (various sizes)
- GN dividers
- Ambient rear storage area
- Rear deck assemblies
- Custom joinery solution





FPGWORLD.COM

INLINE

3000 SERIES BAIN MARIE 1200 FREESTANDING/CURVED HEATED

HEATED DATA

MODEL	TEMPERATURE RANGE	RECOMMENDED CORE PRODUCT TEMPERATURE	ENVIRONMENTAL TEST CONDITIONS	HEATING
IN-3B12-CU-FF-FS	+30°C - +110°C	> +65°C	22°C / 65% RH	Low-wattage, high-density element / 2x 100 watt linear halogen

ELECTRICAL DATA

MODEL	VOLTAGE	PHASE	CURRENT	E24H (kWh)	kWh per hour (average)	IP RATING	MAINS		HEAT LAMPS	HALOGEN LIGHTING	
							CONNECTION	CONNECTION PLUG ¹		HOURS	COLOUR
IN-3B12-CU-FF-FS	220-240 V	Single	7.5 A	28.8	1.2	IP 22	3 metre, 3 core cable	10 amp, 3 pin plug	2x 100 watt linear halogen	3000	Warm white

¹Please advise country to change plug specification.

CAPACITY, ACCESS & CONSTRUCTION

MODEL	DISPLAY AREA	NO. OF 1/1 PANS	ACCESS FRONT	ACCESS REAR	CHASSIS CONSTRUCTION
IN-3B12-CU-FF-FS	0.45 m ²	3	Fixed front	Sliding doors	Stainless 304 and mild steel


DIMENSIONS

MODEL	H x W x D mm (Uncrated)	MASS (Uncrated)
IN-3B12-CU-FF-FS	1261 x 1203 x 663	- kg

Crated weights and dimensions vary. Please contact us for information on your shipment.

Installation note:

Model cutout dimensions: IN-3B12-CU-FF-FS models require 1208 x 668 benchtop cutout. Joinery height 652mm (see product manual for installation guide).

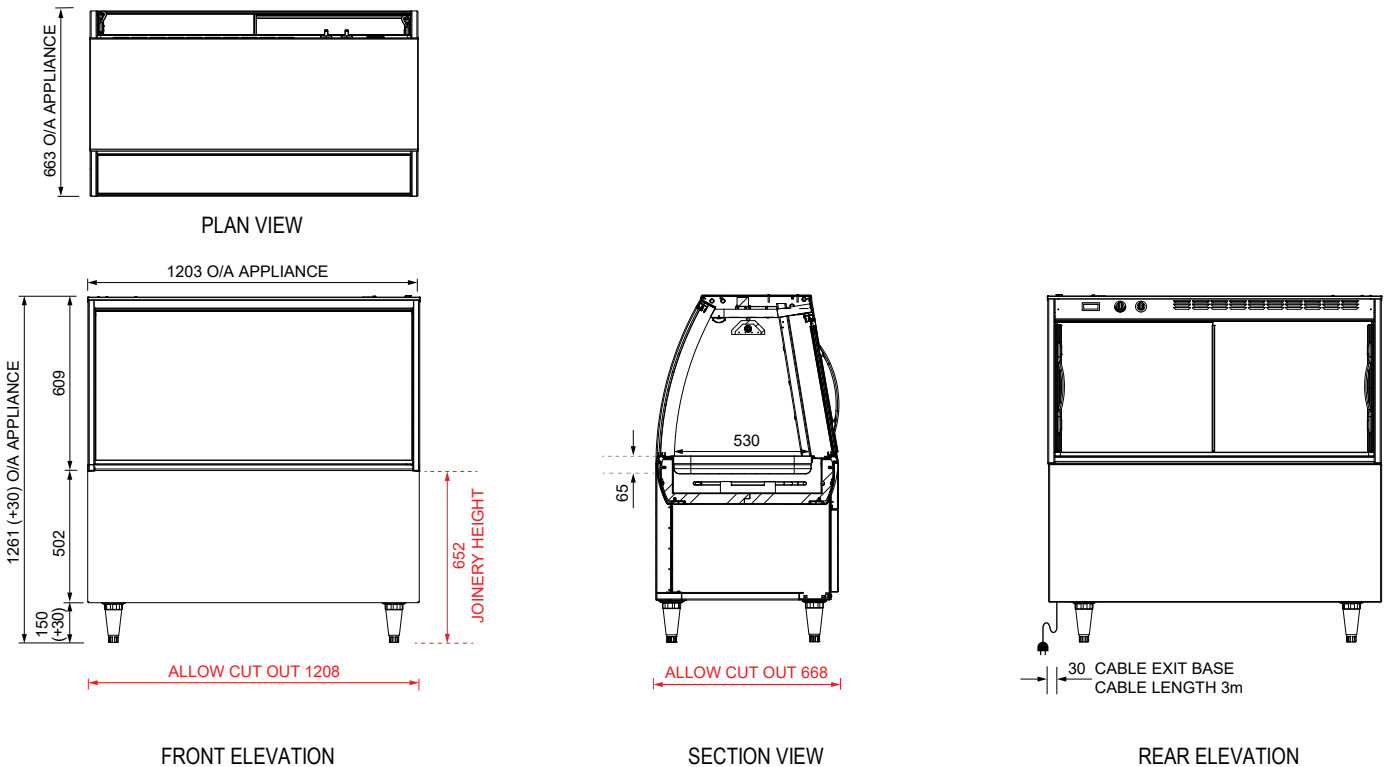

More information including technical data and installation guidelines is available from the Product Manual published on our website.

In line with our policy to continually develop, improve and support our products, Future Products Group Ltd reserves the right to change specifications and design without notice.



PH: 08 9302 1299
51 Paramount Dr Wangara WA 6065
sales@practicalproducts.com.au
www.practicalproducts.com.au