

WATER INLET (G3/4" FEMALE) 1600 LONG OUTSIDE

TECHNICAL DRAWING




PRODUCT FEATURES

- Individual premium crescent cube with no ice bridging.
- Exceptionally hard crystal clear cubes that melt slowly.
- Durable stainless steel exterior.
- Slide in air filter at front for easy cleaning maintaining performance efficiency.
- Double-sided stainless steel evaporator for all water conditions - produces more ice in less cycles.
- Flush mount to rear wall.
- Good in hard water areas.
- Snap in water tank design easy to remove for sanitization.
- Low electrical consumption.
- Low water consumption.

CUBE SIZE:


• 3 year parts and labour warranty on entire unit.



WA DEALER PRACTICAL PRODUCTS PTY LTD

PH: 08 9302 1299 51 Paramount Dr Wangara WA 6065 sales@practicalproducts.com.au www.practicalproducts.com.au



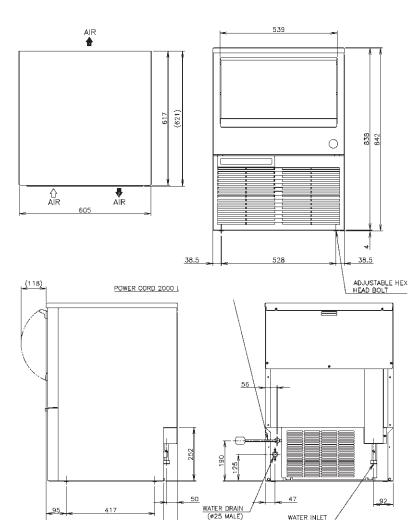

PRODUCT SPECIFICATION

55:

Production Capacity	Approx. 53kg @10°C Air temp; 10°C Water
per 24hours	Approx. 50kg @21°C Air temp; 15°C Water
	Approx. 41kg @32°C Air temp; 21°C Water
Max Storage Capacity	Approx. 23kg (Bin Cont Setting Approx. 19kg)
Freeze Cycle Time	Approx. 28 Min
Ice Production Per cycle	Approx. 1.03kg/110pcs
Dimensions	605mm (W) x 617mm (D) x 842mm (H)
	(Adjustable legs are optional)
Cooling	Air
Weight Net/Gross (kg)	46 / 58
AC Supply Voltage	1 PHASE 220-240V 50Hz /10amp Plug
Amperage	Running: 1.9A Starting: 15.5A
Refrigerant Charge	R134a / 210g
Operating Conditions	Ambient Temp.: 1-40°C
	Water Supply Temp.: 5-35°C
	Water Supply Pressure: 0.07-0.8MPa (0.7-8bar)
	Voltage Range: ± 6%

65

Descriptions and specifications are subject to change at any time, without notice. Illustrations for demonstration purposes.

Copyright $\ensuremath{\mathbb{C}}$ 2019 Hoshizaki Lancer Pty Ltd. All right reserved. E&OE Date: Sept 2020