

## ELEVATION SERIES CUBE ICE MAKER CIMO825



Model:




CIM0825 ON B42

# **Features and Benefits**

- 22.25" (565 mm) wide space-saving design.
- Produces up to 418 kg of ice per day.
- Energy and Environment
  - Exceeds new 2018 DOE (Department of Energy) regulations.
  - Up to 20% more energy efficient than other models.
  - Environmentally friendly, including BPA-free plastic and recyclable parts.
- Sanitation
  - Plastic Food Zone eliminates hard-to-clean nooks and crannies, allowing for effortless wipe down and easy, long-lasting sanitation.
  - Built in Agion<sup>®</sup> ensures unbeatable antimicrobial protection.
  - Smart LED light indicates machine status and when cleaning is required.
  - Simple, one-touch controls for sanitization and descaling.
  - BPA-free snap-in, snap-out dishwasher-safe components.
- Unique Dual Exhaust Air-cooled machines are designed to discharge hot air from both the side and top of the unit, increasing installation flexibility and reducing the potential of obstructed exhaust.
- Universal Smart Harness<sup>™</sup> control board simplifies installation and servicing with better access, digital diagnostics, universal components and common configuration.

#### Ice Form



CUBE

(NSE)

	ICE STORAGE BINS										
Kits	Model No. Capacity Width 10 kg 762 mm		ICB110SC 110 kg 560 mm	<b>B40</b> 156 kg 762 mm	<b>B42</b> 160 kg 559 mm	ICB180SC 180 kg 760 mm	<b>B55</b> 232 kg 762 mm	ICB230SC 232 kg 764 mm	<b>CIB400</b> 400 kg 1,220 mm	<b>B110</b> 388 kg 1,219 mm	
	CIM0825	BT55	Kit Not Required	BT55	Kit Not Required	BT55			ΒΤιοο		



Bin Chart Kits for Combining Wider Bins with Smaller Models

\*See Price List for Adapter Kits to combine ice makers with most available ice/beverage dispensers.

### **Options & Accessories**

WATER FILTERS								
Ice Machine Model	Manifold							
	System	Replacement						
CIMO825	CD20B	CD200B						

Note: All modular cube CIM units can be installed with manufacturer approved ozone delivery systems.


### Ice Maker Warranty

COMMERCIAL WARRANTY					
Ice Maker	3 YEARS parts and labour				
Evaporator and Compressor	5 YEARS parts				







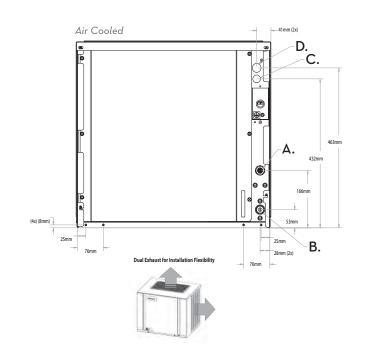

#### Air Cooled


Please note: air-cooled units require 152 mm clearance for air intake and exhaust.

- A. Ice maker potable water in, 3/8" FPT.
- B. Ice maker water out, 3/4" FPT.
- C. Hole for electrical connections, 7/8".
- D. Electrical connection junction box, 7/8".

## **Operating Requirements**

	MINIMUM	MAXIMUM		
		50Hz		
Ambient Temp. Range Air	10°C	43°C		
Water Temp.	4.4°C	43 0		
Water Pressure	1.4 BAR	5.5 BAR		

#### Dimensions



### **Specifications**

		Half-Cube Ice Production per 24hrs		<b>Water Usage</b> litres per 45 kg of Ice 32°c air/21°c water		kWH Used	Watts Used				
Model Number	Cond. Unit	21°c air/ 10°c water (kg)	32°c air/ 21°c water (kg)	Potable	Condenser			Voltage Characteristics	Min. Circuit Ampacity	Fuse Size	Refrigeration Capacity per hour
CIM0825A	Air	418	329	68	-	473	1440	220-240/50/1	10.8	16	4,206

\* Daily ice production based on half cube configuration. When installing a CIM on a drink dispenser, the KCUBEDISPB MUST be used.

Notes: Number of Wires: Approx. Shipping Weight Ibs (kg): Refrigerant Type:

3 (including ground) CIMO825A 100 R4O4A



PH: 08 9302 1299 51 Paramount Dr Wangara WA 6065 sales@practicalproducts.com.au www.practicalproducts.com.au