



Features

- Space-saving 30" (762 mm) wide undercounter design.
- Produces up to 136 kg of ice per day.
- Harvest Assist provides consistent ice production for the life of the ice maker while reducing energy consumption and increasing capacity.
- *Pure Ice®* exclusively by Ice-O-Matic. Built-in antimicrobial protection for the life of the ice maker inhibits bacteria growth on ice maker surfaces. Coast's optional water filtration system provides protection against unpleasant tastes, odours and scale formation.
- Durable, electroless nickel plating on all evaporator plates ensures reliability.
- Constructed from corrosion-resistant stainless steel and fingerprint-proof plastic.

• Made in U.S.A

Options & Accessories

	WATER FILTERS				
	lce Machine Model	Manifold			
		System	Replacement		
	ICEU305	CD20B	CD200B		

Ice Maker Warranty

Every Ice-O-Matic ice maker is backed by a warranty that provides both parts and labor coverage.

- Three years **Parts** and **Labor**.
- Five years **Parts** coverage on the evaporator and compressor.

Ice Form



Space-Saving Solutions

- Front air discharge design for compact spaces.
- Low profile top saves counter space.
- Stores up to 44 kg of ice.
- Easy front access to ice.



ICEU305 - SELF CONTAINED CUBE ICE MAKER

Air In-Front

991 mm




ICEU305 SELF CONTAINED CUBE ICE MAKER

Air and Water Cooled

- A. Ice maker water in 3/8" FPT.
- B. Bin and ice maker drain, $^{3}\!/\!_{4}$ " FPT.

771 mm

C. Electrical cord on 115 Volt unit.

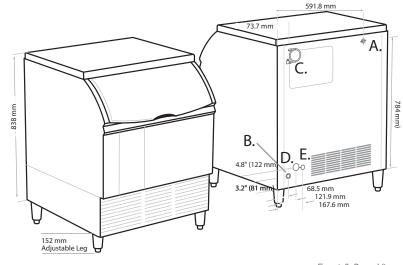

Front & Rear View

Operating Requirements

Air Out-Front

761 mm

	MINIMUM	MAXIMUM		
		50 Hz		
Ambient Temp. Range Air	10°C	43°C		
Water Temp.	4.4°C			
Water Pressure	1.4 BAR	4.1 BAR		

Dimensions

ALL MODELS						
W x D x H (mm)	771 x 761 x 991					
870mm high on castors						

Specifications

Model Number Cond. Unit		Ice Production per 24hrs		Water Usage	kWH Used	Watts Used	Voltage Characteristics	Min. Circuit Ampacity	Fuse Size	Approx. BTUs per hour
	21°c air/ 10°c water kg	32°c air/ 21°c water kg	Litres per 45 kg of ice @ 32°c air / 21°c water	Per 45 kg of ice @ 32°c air / 21°c water	Per Hr @ 32°c air / 21°c water					
ICEU305A	Air	136	101	116	7.70	720	220-240/50/1	6.6	16	5,392

NOTES: Number of Wires: Approx. Shipping Weight kg: Refrigerant Type:

3 (including ground) ICEU305A 93 R404A

WA DEALER PRACTICAL PRODUCTS PTY LTD

> PH: 08 9302 1299 51 Paramount Dr Wangara WA 6065 sales@practicalproducts.com.au www.practicalproducts.com.au