



Icematic introduces a new range of full cube ice machines, with fully electronic functions, that respects the most stringent **anti-pollution parameters** by using **Propane natural gas (R290)**.

Self contained ice maker.

Up to 45kg production per 24/hr of medium ice cube.
22kg storage bin.


Complete with legs, water & drain hoses + 1 ice scoop.
10 AMP power supply.

180 mm drain height including legs to finished floor.




ICE PRODUCTION



Air Cooled Unit

| Air Temp. |  | Water Temperature | | | |
|-----------|---|-------------------|-----------|-----------|-----------|
| | | 32° | 21° | 15° | 10° |
| °C | | 32° | 21° | 15° | 10° |
| °F | | 90° | 70° | 60° | 50° |
| 10° | | 42 | 49 | 53 | 54 |
| 50° | | 93 | 108 | 117 | 119 |
| 21° | | 35 | 41 | 45 | 46 |
| 70° | | 77 | 90 | 99 | 101 |
| 32° | | 32 | 38 | 42 | 43 |
| 90° | | 71 | 84 | 93 | 95 |
| 38° | | 28 | 34 | 38 | 39 |
| 100° | | 62 | 75 | 84 | 86 |

Water Cooled Unit

| Air Temp. |  | Water Temperature | | | |
|-----------|---|-------------------|-----------|-----------|-----------|
| | | 32° | 21° | 15° | 10° |
| °C | | 32° | 21° | 15° | 10° |
| °F | | 90° | 70° | 60° | 50° |
| 10° | | 48 | 50 | 53 | 54 |
| 50° | | 106 | 110 | 117 | 119 |
| 21° | | 44 | 47 | 49 | 51 |
| 70° | | 97 | 104 | 108 | 112 |
| 32° | | 42 | 45 | 47 | 49 |
| 90° | | 93 | 99 | 104 | 108 |
| 38° | | 40 | 43 | 45 | 47 |
| 100° | | 88 | 95 | 99 | 104 |

CUBE TYPE




20g weight BRIGHT CUBE

32mm x 35mm x 37mm

The Bright Ice Cube, appreciated for its versatility, is perfect for use in ice buckets, whiskey on the rocks, cocktails and appetisers. The crystal clear appearance of the Bright Cube makes it essential when a high quality is required.

CONTROL PANEL




Start-standby Switch
Status Led


BIN CAPACITY

22 Kg - 48.5 lbs | 1100 pcs

DIMENSIONS

W x D x H (mm)

 500 x 580 x 800/835

 560 x 640 x 960

OPERATING REQUIREMENTS

Rejected Heat 1707 W





Air Volume 310 m³/h
















220-240/50/1




R290 GWP = 3

| MIN | | MAX | |
|----------------|---|----------------|--|
| 10°C (50°F) |  | 40°C (104°F) | |
| 5°C (41°F) |  | 35°C (95°F) | |
| - 10 % |  | + 10 % | |
| 1 Bar (14 psi) |  | 5 Bar (70 psi) | |

SPECIFICATIONS

| |  cond |  comp. W |  ABS. W |  Fuse |  kWh/100kg |  L / hr |  kg |  lbs |  kg |  lbs |  Ton CO2 equiv. |
|------------------|--|---|--|--|---|--|--|---|--|---|--|
| CS54 ZP A |  | 1167 | 520 | 10 | 23.3 | 4.5 | 42 | 93 | 50 | 110 | 0 |
| CS54 ZP W |  | 1167 | 440 | 10 | 20.6 | 43.4 | 42 | 93 | 50 | 110 | 0 |




Vista frontale
Front view

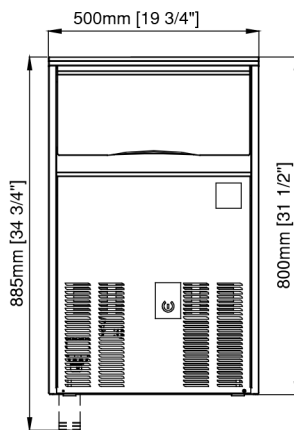

Vista laterale
Lateral view



Vista superiore
Top view



Kit 4 Feet Optional
Kit 4 piedini Optional
Ø50mm H100-120 mm

- (B)** Electrical cable supply / Ingresso alimentazione elettrica
- (C)** Water outlet connection / Attacco scarico acqua diam. 20 mm

- (D)** Water outlet connection water condensation / Uscita acqua condensatore ad acqua diam. 20 mm
- (E)** Water inlet connection / Attacco entrata acqua - 3/4"gas