

makes it simple to adjust speed and temperature.

footprint (1387mm height to top conveyor).

Stackable up to three oven cavities high

Temperature is adjustable from 121°C to 316°C

Front-loading access door with cool handle Direct conveyor drive is powered by an AC motor

2032W x 1537D x 1121H mm (single deck) 2032W x 1537D x 1610H mm (double deck) 2032W x 1537D x 1692H mm (triple deck)

PRODUCTION EXAMPLE PER DECK Single deck: 90 x 12" pizzas/hr at 6mins

40" (1016mm) baking chamber

Stainless Steel top, front and sides

large cooking outputs.

STANDARD FEATURES FastBake[™] technology

OPTIONAL FEATURES

DIMENSIONS

(other lengths available)

Clearance: Rear: 152mm

•

•

•

.

•

The Lincoln Impinger 1600 Series is a self-contained conveyorised Impinger gas oven that is stackable up to three high and designed for medium to

The Impinger has a 32" (812mm) wide x 40" (1016mm) deep baking chamber and a front access door with cool handle. The digital control panel

The low profile design allows for triple stacking within a manageable

Standard with FastBake[™] technology which can reduce bake time by as much as 30% without increased noise levels or loss of product quality.

32" (813mm) wide, 73" (1854mm) long conveyor belt with product stop

Conveyor speed is adjustable from 1 minute to 30 minutes cooking time

· 3/4" X 1200mm Flexible gas hose with quick disconnect - 432018-1200HK

Right side: 610mm

Oven Start-Up/Check-Out by service agent included in price

1600 SERIES IMPINGER




LOW PROFILE CONVEYOR OVEN



triple deck shown

ORDERING GUIDE		
Model Numbers	Qty	Description
1600 Single Deck		
1633-NG	1	Natural Gas
1634-LP		Propane Gas
1609		Oven Top
1627		Top Cap Motor Cover
1612		High Stand With Casters
1082		Take Off Shelf
1600 Double Deck		
1633-NG	2	Natural Gas
1634-LP		Propane Gas
1609	1	Oven Top
1627	1	Top Cap Motor Cover
1612	1	High Stand With Casters
1082	2	Take Off Shelf
1600 Triple Deck		
1633-NG	3	Natural Gas
1634-LP	5	Propane Gas
1609	1	Oven Top
1627	1	Top Cap Motor Cover
1610	1	Low Stand With Casters

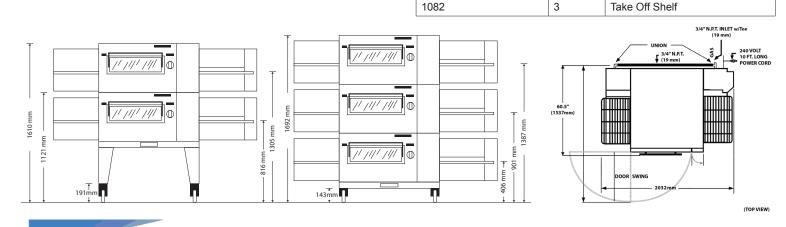



PH: 08 9302 1299 51 Paramount Dr Wangara WA 6065 sales@practicalproducts.com.au www.practicalproducts.com.au

TECHNICAL DATA Gas Connection: 3/4"

Gas Approval No: AGA 4930 G

Power Supply Model \delta 1633-NG <u> 1634-LP</u>

Output 1NAC 230V 1 Phase 50Hz 4amp 116MJ per deck 2.5m Lead & Plug included

116MJ per deck

🚺 Natural Gas 🛛 🕺 Propane Gas

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.