



AF Series Self Contained Flake Ice Machine - up to 67kg AF 80 AS OX Flake Ice







Note: Ice production rate is measured with the water temperature at 10°C and an ambient temperature of 21°C.

- Up to 67kg daily production rate
- 25kg storage bin capacity
- Air cooled version
- XSafe Natural Sanitation System
- Stainless steel auger and freezing cylinder evaporator
- Water in / ice out concept limits excess energy, water and time wastage
- Agion Technology resists the growth of microbes and the development of unpleasant odours
- Simple, reliable electromechanic controls
- Clean alert indicator to clean filter
- Resistant stainless steel exterior
- Easy access front condenser air filter
- External indicator lights to show operation status
- Includes removable air filter, ice scoop, water and drain hose

















AF Series Self Contained Flake Ice Machine - up to 67kg AF 80 AS OX

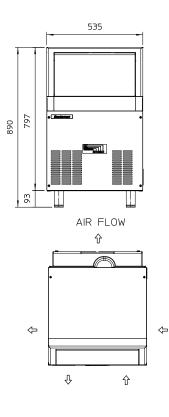

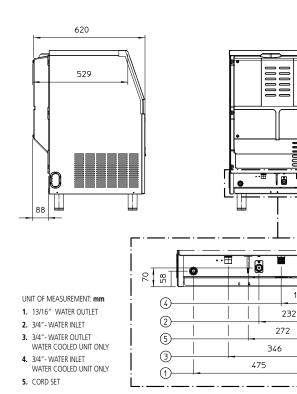

Ice production per 24 hours

| Ambient temperature / Water temperature | | | |
|---|-------------|-------------|-------------|
| | 10°C / 10°C | 21°C / 10°C | 32°C / 21°C |

| 70 67 53 | 10 C / 10 C | 21 C / 10 C | 52 07 21 0 |
|----------|-------------|-------------|------------|
| | 70 | 67 | 53 |

Dimensions W

| Width: | 535mm |
|----------------|------------------------|
| Depth: | 620mm |
| Height: | 890mm (including legs) |
| Nett weight: | 50kg |
| Packed weight: | 58kg |

Water consumption

Air cooled version: 2.2 litres per hour

Electrical rating

Air cooled version: 230-240V, 1P+N+E, 50Hz, 340W, 10A cordset supplied

No. Circuit wire: 3 Compressor: 790W Energy consumption: 6.9kW/24hr

WA DEALER PRACTICAL PRODUCTS PTY LTD

PH: 08 9302 1299 51 Paramount Dr Wangara WA 6065 sales@practicalproducts.com.au www.practicalproducts.com.au

Refrigerant type

R134A

Installation distance from wall 100mm Rear Sides 150mm Operating requirement air temperature 10-43°C

149

Water connection requirements

Inlet connection: R 3/4" 5-35°C Cold water: Pressure: 100-500kPa Water outlet connection: ؾ"