

EC Series Self Contained Gourmet Ice Machines – with Progressive Water Discharge – up to 74kg **ECM 127 AS OX** Medium gourmet cube 20g, Ø30mm x 34mm



Medium gourmet cube
20g, 30mm dia x H 34mm




Note: Ice production rate is measured with the water temperature at 10°C and an ambient temperature of 21°C.

- Up to 74kg daily production rate
- 39kg storage bin capacity
- Air cooled version
- Produces individual transparent Gourmet crystal clear supercubes
- Hydrocarbons R290 refrigerant gas
- XSafe - Natural Sanitation System
- PWD-Progressive water discharge: pumps excess residual water up to a distance up to 15 meters
- Agion Technology resists the growth of microbes and the development of unpleasant odours
- Simple, reliable electromechanic controls
- Horizontal ice evaporator spray-system technology
- Resistant stainless steel exterior
- Front access condenser air filter, removable and washable
- Routine maintenance visible alarm light on front panel
- Ergonomically designed ice storage access with disappearing door and door closing movement dampening system
- Includes removable air filter, ice scoop, water and drain hose

EC Series Self Contained Gourmet Ice Machines – with Progressive Water Discharge – up to 74kg

ECM 127 AS OX

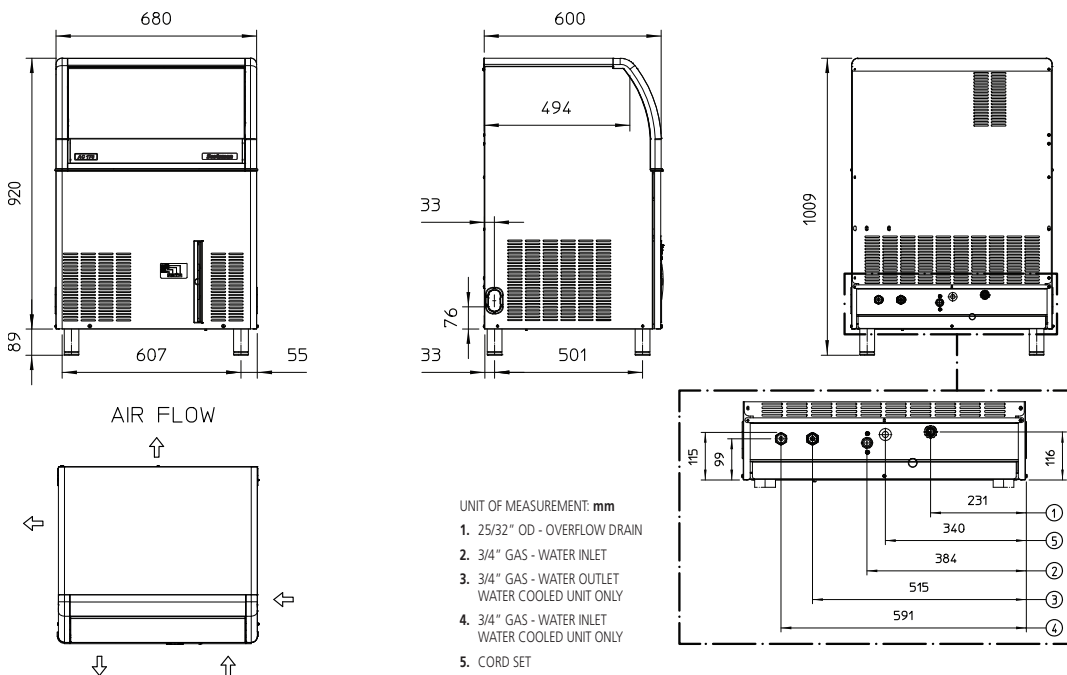

Ice production per 24 hours

Ambient temperature / Water temperature

| 10°C / 10°C | 21°C / 10°C | 32°C / 21°C |
|-------------|-------------|-------------|
| 75 | 74 | 60 |

Dimensions

| | |
|----------------|-------------------------|
| Width: | 680mm |
| Depth: | 600mm |
| Height: | 1009mm (including legs) |
| Nett weight: | 67kg |
| Packed weight: | 77kg |

Water consumption

Air cooled version: 7.4 litres per hour

Electrical rating

Air cooled version: 230-240V, 1P+N+E, 50Hz, 670W,
10A cordset supplied

| | |
|---------------------|-----------|
| No. Circuit wire: | 3 |
| Compressor: | 1400W |
| Energy consumption: | 12.9kW/hr |

Refrigerant type

R290

Installation distance from wall

| | |
|---|-------|
| Rear | 100mm |
| Sides | 150mm |
| Operating requirement air temperature 10-43°C | |

Water connection requirements

| | |
|--------------------------|------------|
| Inlet connection: | R 3/4" |
| Cold water: | 5-38°C |
| Pressure: | 100-500kPa |
| Water outlet connection: | Ø3/4" |

Important Notice:

Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.



© Copyright Moffat Ltd
AU.SM.2001



WA DEALER
PRACTICAL PRODUCTS PTY LTD

PH: 08 9302 1299
51 Paramount Dr Wangara WA 6065
sales@practicalproducts.com.au
www.practicalproducts.com.au