



# EC Series Self Contained Gourmet Ice Machines — with Progressive Water Discharge — up to 31kg

ECS 57 AS OX Small gourmet cube 8g, Ø21mm x 25mm



Small gourmet cube 8g, 21mm dia x H 25mm



Note: Ice production rate is measured with the water temperature at  $10^{\circ}$ C and an ambient temperature of  $21^{\circ}$ C.

- Up to 31kg daily production rate
- 12kg storage bin capacity
- · Air cooled version
- Produces individual transparent Gourmet crystal clear supercubes
- · Hydrocarbons R290 refrigerant gas
- XSafe Natural Sanitation System
- PWD-Progressive water discharge: pumps excess residual water up to a distance up to 15 meters
- Agion Technology resists the growth of microbes and the development of unpleasant odours
- Simple, reliable electromechanic controls
- Horizontal ice evaporator spray-system technology
- · Resistant stainless steel exterior
- Front access condenser air filter, removable and washable

- Routine maintenance visible alarm light on front panel
- Ergonomically designed ice storage access with disappearing door and door closing movement dampening system
- Includes removable air filter, ice scoop, water and drain hose
- Optional legs available
















# EC Series Self Contained Gourmet Ice Machines — with Progressive Water Discharge — up to 31kg

# ECS 57 AS OX

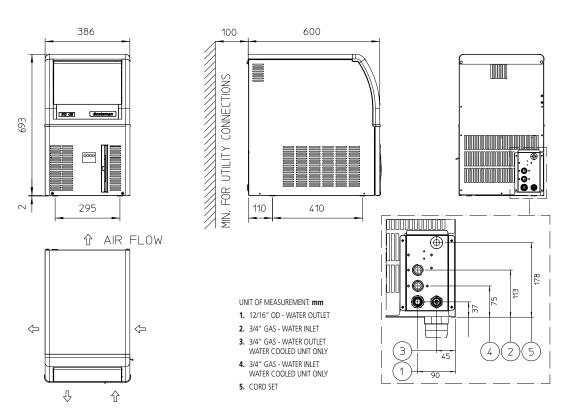

## Ice production per 24 hours

Ambient temperature / Water temperature

| 10°C / 10°C | 21°C / 10°C | 32°C / 21°C |
|-------------|-------------|-------------|
| 33          | 31          | 25          |

#### Dimensions

Width: 386mm
Depth: 600mm
Height: 695mm
Nett weight: 38kg
Packed weight: 45kg

#### Water consumption

Air cooled version: 4.0 litres per hour

## Electrical rating

Air cooled version: 230-240V, 1P+N+E, 50Hz, 370W, 10A cordset supplied

No. Circuit wire: 3

Compressor: 730W
Energy consumption: 6.6kW/hr

# Refrigerant type

R290

## Installation distance from wall

Rear 100mm Sides 150mm

Operating requirement air temperature 10-43°C

#### Water connection requirements

Inlet connection: R <sup>3</sup>/<sub>4</sub>"
Cold water: 5-38°C
Pressure: 100-500kPa
Water outlet connection: Ø<sup>3</sup>/<sub>4</sub>"

Important Notice:

Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.



© Copyright Moffat Ltd



PH: 08 9302 1299 51 Paramount Dr Wangara WA 6065 sales@practicalproducts.com.au www.practicalproducts.com.au