


MFN Series Modular Nugget Ice makers – up to 265kg

MFN S 46 AS OX Nugget ice – 1g – Ø11mm x H 13mm



Nugget ice
1g – Ø11mm x H 13mm

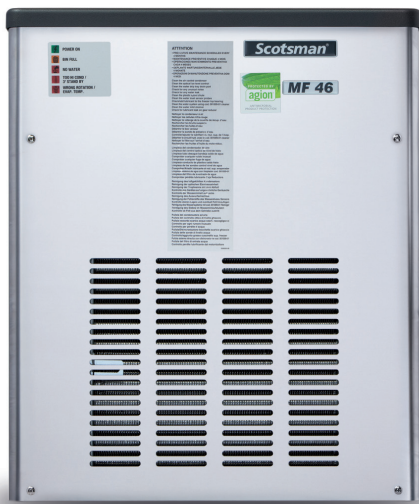

Note: Ice production rate is measured with the water temperature at 10°C and an ambient temperature of 21°C.

- Maximum production rate 265kg/day
- Head only ice maker: requires a separate storage bin to store the ice produced
- XSafe - Natural Sanitation System
- Agion Technology resists the growth of microbes and the development of unpleasant odours
- Air cooled version
- Hermetic compressor
- Stainless steel auger and freezing cylinder (evaporator)
- Plug-and-work technology
- Water in / ice out concept limits excess energy, water and time wastage
- Simple, reliable electromechanic controls
- External indicator lights to show operation status and maintenance alert
- Double protection – electronic rotation sensor & drive coupling

- Low-water sensor protection
- Stainless steel finish, top cover in PS plastic with removable panels for ease of maintenance
- Includes removable air filter, water and drain hose

Recommended storage bins


- NB 193 with CBT 22 EFCD cover – 129kg storage capacity
- NB 393 with CBT 30 EFSD cover – 178kg storage capacity
- NB 530 with CBT 30 EFSD cover – 243kg storage capacity
- NB 948 with CBT 48 FMCD cover – 406kg storage capacity



XSafe

MFN Series Modular Nugget Ice makers – up to 265kg

MFN S 46 AS OX

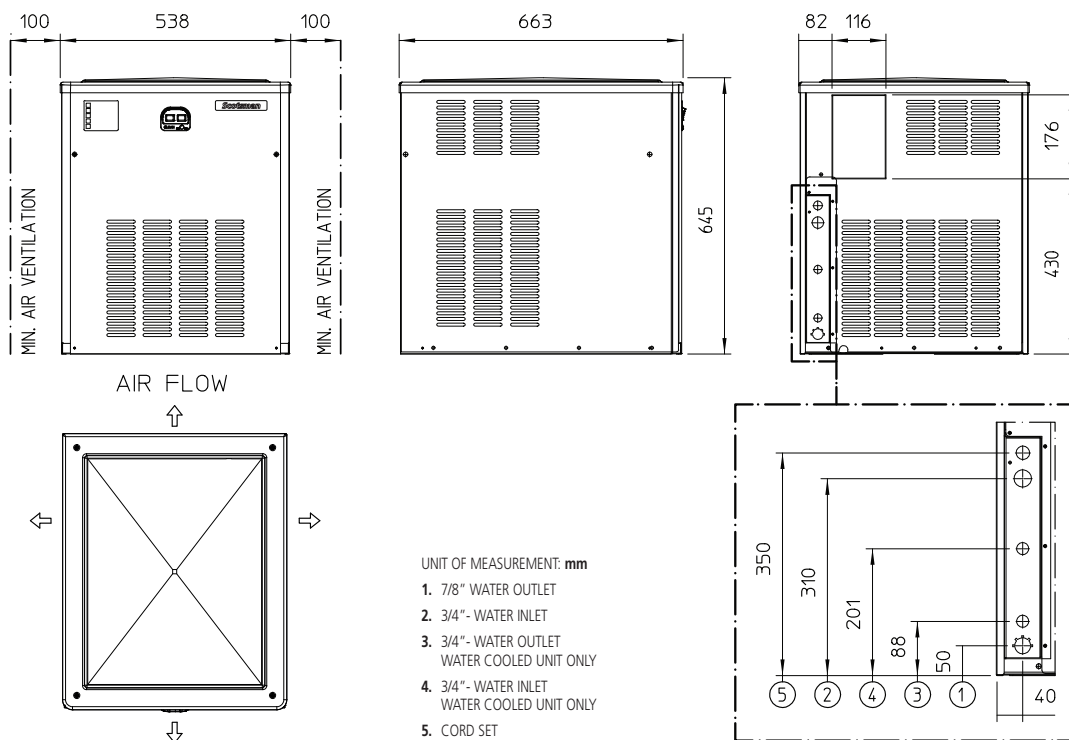

Ice production per 24 hours

Ambient temperature / Water temperature

10°C / 10°C	21°C / 10°C	32°C / 21°C
270	265	215

Dimensions

Width:	538mm
Depth:	663mm
Height:	645mm
Nett weight:	78kg
Packed weight:	87kg

Water consumption

Air cooled version: 9 litres per hour

Electrical rating

Air cooled version: 230-240V, 1P+N+E, 50Hz, 1200W,
15A cordset supplied

No. Circuit wire: 3
Compressor: 2650W
Energy consumption: 25kW/hr

Refrigerant type

R404a

Installation distance from wall

Rear 100mm
Side 150mm

Operating requirement air temperature 10-43°C

Water connection requirements

Inlet connection: R 3/4"
Cold water: 5-38°C
Pressure: 100-500kPa
Water outlet connection: Ø7/8"

Important Notice:

Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

© Copyright Moffat Ltd
AU.SM.2001



WA DEALER
PRACTICAL PRODUCTS PTY LTD

PH: 08 9302 1299
51 Paramount Dr Wangara WA 6065
sales@practicalproducts.com.au
www.practicalproducts.com.au