

Technical data sheet for

P85M8 DOUBLE STACKED

Full Size 8 Tray Manual / Electric Prover/Holding Cabinet Double Stacked



P85M8/2

P85M8 units shall be Moffat electrically heated Turbofan Prover and Holding Cabinets. The prover and holding cabinets shall have double skin construction with stainless steel interior and exterior sides, front and top. Doors shall be side hinged and field reversible. Units shall have capacity for 8 18" x 29" trays, or 8 18" x 29" trays with optional 18" rack set. A single speed fan shall gently and evenly circulate air around the cabinet. Cabinets shall be controlled by a mechanical thermostat and humidity via a control of the water tank, thermometers shall indicate the cabinet temperature. Prover and Holding Cabinets shall be fitted with 10A cordsets. The prover and holding cabinets shall be double stacked using Double Stacking Kit DSKP85. Units shall be supplied in 100% recyclable shipping packaging.

Double stacked models are supplied as two individual prover and holding cabinets and a double stacking kit for field assembly.

STANDARD FEATURES

DOUBLE STACKED

- Two 8 tray capacity
- 910mm width
- Full stainless steel spacer frame

PROVER/HOLDING CABINET (each)

- Dual function Prover and Holding Cabinet
- 8 406mm x 736mm / 16" x 29" tray capacity
- 76mm tray spacing
- 10A cordset fitted
- Full double skin construction
- Auto water fill system with optional integrated water filter kit
- Continuous door seal
- Side hinged door (standard LH hinge). Optional RH hinge (field convertible)
- Off / Proof / Hold mode selection
- Low velocity circulation fan system
- Mechanical thermostat
- Humidity level control
- Dual halogen cabinet interior lamps
- Cabinet temperature display thermometer

OPTIONS

- 457mm x 762mm / 18" x 30" tray rack set for prover

ACCESSORIES

- Optional M236060 Core Temperature Probe Kit
- Optional 3M Cuno water filter kit complete with cartridge and connection fittings (Installs in pre-fitted rear housing of cabinet for flush rear installation)

P85M8/2 Full Size Manual / Electric Prover/Holding Cabinet

CONSTRUCTION- PROVERS

304 stainless steel interior cabinet
Stainless steel front, sides and top exterior
Stainless steel interior side racks
Stainless steel frame side hinged door
5mm thick door glass
Stainless steel control panel
Aluminised coated steel base and rear panels

CONSTRUCTION - DOUBLE STACKING KIT

All stainless steel construction
Stainless steel spacer frame

CONTROLS (each prover)

Off / Proof / Holding mode selector switch.
Mechanical thermostat 20-85°C
Air heating ON control panel indicator
Humidity level control
Humidity tank ON control panel indicator
Cabinet temperature thermometer
Auto-fill water system standard

CLEANING

Stainless steel top and side exterior panels
Stainless steel interior chamber
Easy access to all interior surfaces
Fully removable stainless steel rack support
Removable humidity water tank (no tools)

SPECIFICATIONS

Electrical Requirements (each prover)
230-240V, 50Hz, 1.5kW, 1 phase, 6.2A
10A cordset fitted

Water Requirements (optional)

Cold water connection ¾" BSP male
80psi maximum inlet pressure / 20psi minimum inlet pressure

External Dimensions

Width 910mm
Height 1789mm
Depth 880mm

Prover Internal Dimensions (each prover)

Width 465mm
Height 730mm
Depth 795mm
Volume 0.27m³

Nett Weight (double stack complete)

164kg

Packing Data (P85M8 provers each)

133kg
1.05m²
Width 950mm
Height 1070mm
Depth 1020mm

Packing Data (Stacking Kit)

7kg
0.13m³
Width 770mm
Height 970mm
Depth 170mm

Double Stacking Kits


For after market double stacking two P85M8 prover/holding cabinets
DSKP85 - Double stacking kit

INSTALLATION CLEARANCES

Rear 25mm
LH Side 25mm
RH Side 25mm

CLEARANCE FROM SOURCES OF HEAT

A minimum distance of 300mm from the appliance sides is required

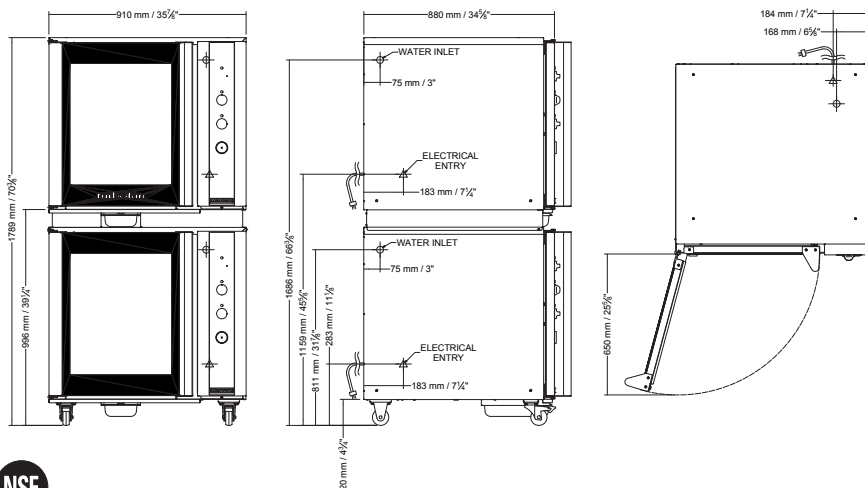

WA DEALER
PRACTICAL PRODUCTS PTY LTD

PH: 08 9302 1299
51 Paramount Dr Wangara WA 6065
sales@practicalproducts.com.au
www.practicalproducts.com.au