

Technical data sheet for

## **P8M DOUBLE STACKED**

Full Size Manual / Electric Prover/Holding Cabinet Double Stacked



P8M/2

P8M units shall be Moffat electrically heated Turbofan Prover and Holding Cabinets. The prover and holding cabinets shall have double skin construction with stainless steel interior and exterior sides, front and top. Doors shall be side hinged and field reversible. Units shall have capacity for up to 16 half size sheet pans or 8 full size sheet pans. A single speed fan shall gently and evenly circulate air around the cabinet. Cabinets shall be controlled by a mechanical thermostat and humidity via a control of the water tank, thermometers shall indicate the cabinet temperature. Prover and Holding Cabinets shall be fitted with 10A plug-in cordsets. The prover and holding cabinets shall be double stacked using Double Stacking Kit DSKP8. Units shall be supplied in 100% recyclable shipping packaging.

Double stacked models are supplied as two individual prover and holding cabinets and a double stacking kit for field assembly.

### STANDARD FEATURES

#### DOUBLE STACKED

- Two 8 full size sheet pan capacity
- Two 16 half size sheet pan capacity
- Compact 735mm width
- Full stainless steel spacer frame

#### PROVER/HOLDING CABINET FEATURES (each)

- Dual function Prover and Holding Cabinet
- 8 18" x 26" / 460 x 660 full size sheet pan capacity
- 16 18" x 13" / 460 x 330 half size sheet pan capacity
- 8 600 x 400 tray capacity (optional kit)
- 76mm tray spacing
- 10A plug-in cordset fitted
- Full double skin construction
- Auto water fill system with optional integrated water filter kit
- Continuous door seal
- Side hinged door (standard LH hinge). Optional RH hinge (field convertible)
- Off / Prove / Hold mode selection
- Low velocity circulation fan system
- Mechanical thermostat
- Humidity level control
- Dual halogen cabinet interior lamps
- Cabinet temperature display thermometer

### ACCESSORIES

- 600 x 400 tray racking kit
- Optional 3M Cuno water filter kit complete with cartridge and connection fittings
- Installs in pre-fitted rear housing of cabinet for flush rear installation

### P8M/2 Full Size Manual / Electric Prover/Holding Cabinet

#### CONSTRUCTION- PROVERS

304 stainless steel interior cabinet  
Stainless steel front, sides and top exterior  
Stainless steel interior side racks  
Stainless steel frame side hinged door  
5mm thick door glass  
Stainless steel control panel  
Aluminised coated steel base and rear panels

#### CONSTRUCTION - DOUBLE STACKING KIT

Stainless steel spacer frame

#### CONTROLS

Off / Prove / Holding mode selector switch.  
Mechanical thermostat 20-85°C  
Air heating ON control panel indicator  
Humidity level control  
Humidity tank ON control panel indicator  
Cabinet temperature thermometer  
Auto-fill water system standard

#### CLEANING

Stainless steel top and side exterior panels  
Stainless steel interior chamber  
Easy access to all interior surfaces  
Fully removable stainless steel rack support  
Removable humidity water tank (no tools)

#### SPECIFICATIONS

Electrical Requirements (each prover)  
230-240V, 50Hz, 1P+N+E, 1.5kW, 6.3A  
10A cordset fitted

Water Requirements (optional)  
Cold water connection ¾" BSP male  
550kpa maximum inlet pressure /  
150kpa minimum inlet pressure

#### External Dimensions

Width 735mm  
Height 1792mm  
Depth 810mm

#### Prover Internal Dimensions (each prover)

Width 465mm  
Height 730mm  
Depth 700mm  
Volume 0.24m3

#### Nett Weight

164kg

#### Packing Data (P8M provers each)

95.3kg  
0.76m3  
Width 760mm  
Height 1080mm  
Depth 925mm

### Double Stacking Kits


For after market double stacking two P8M prover/holding cabinets  
DSKP8 - Double stacking kit

#### INSTALLATION CLEARANCES

Rear 0mm  
LH Side 0mm  
RH Side 25mm

#### CLEARANCE FROM SOURCES OF HEAT

A minimum distance of 300mm from the appliance sides is required

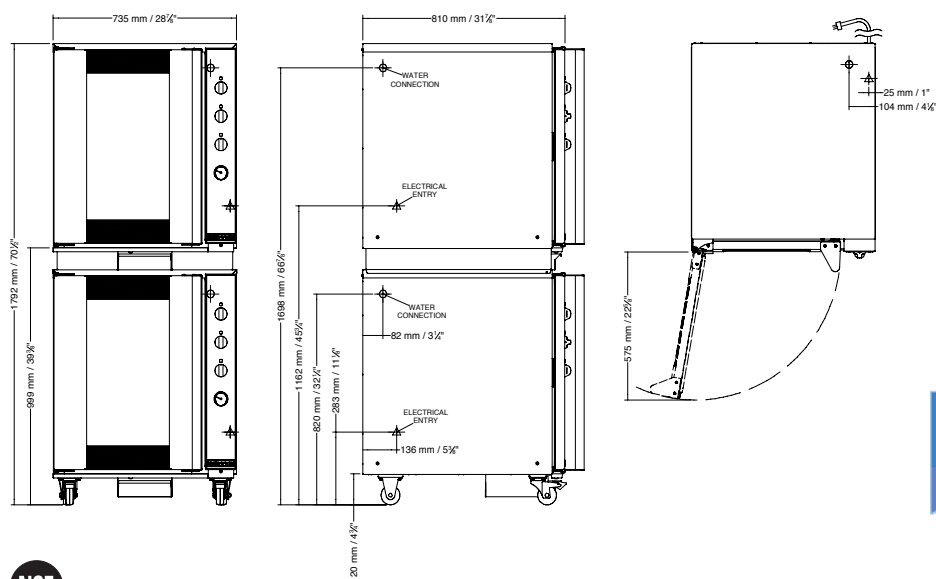

**WA DEALER**  
**PRACTICAL PRODUCTS PTY LTD**

PH: 08 9302 1299  
51 Paramount Dr Wangara WA 6065  
sales@practicalproducts.com.au  
www.practicalproducts.com.au