

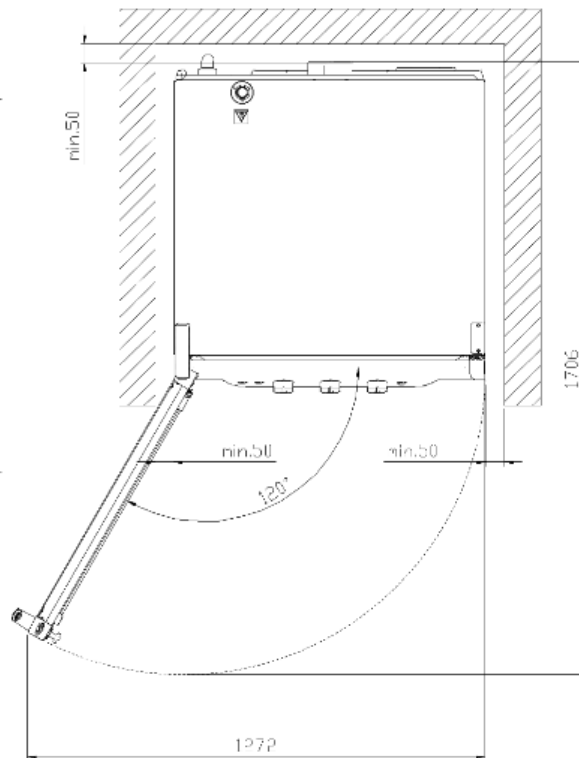
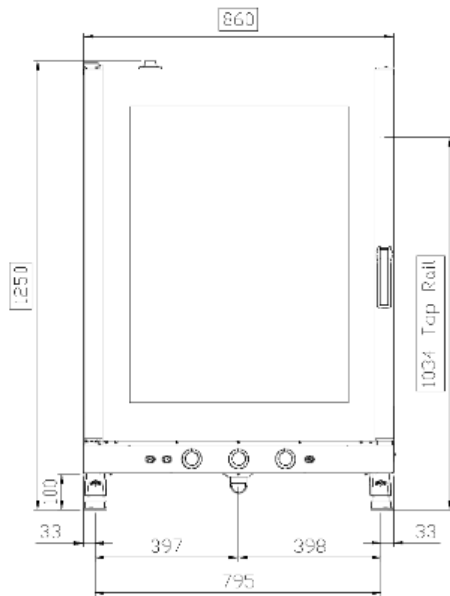


XB893

ELECTRIC

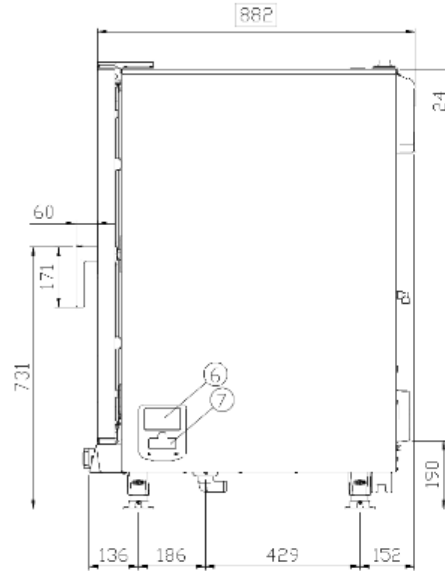

capacity	10 600x400
distance	80 mm
frequency	50 / 60 Hz
Voltage	400 V~ 3N
power	15,8 kW
heat power	-
Dimensions	860x882x1250
weight	112 Kg

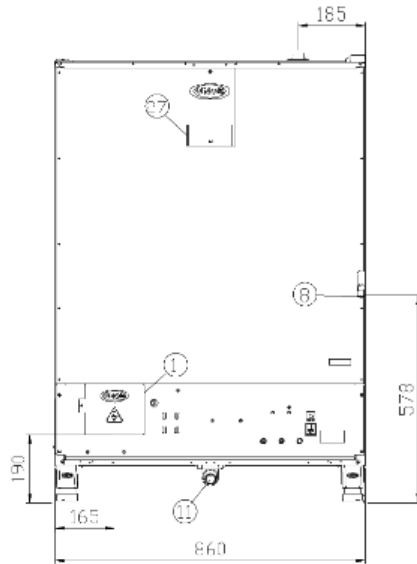

■ :Standard □ :Optional - :Not available

DYNAMIC

MANUAL

BAKING MODES

Convection baking 30 °C - 260 °C

■

■

Convection baking + Humidity 48 °C a 260 °C

■

■

Maximum pre-heating temperature 260 °C

■

■

AIR DISTRIBUTION IN THE BAKING CHAMBER

AIR.Plus technology: multiple auto-reversing fans

■

■

AIR.Plus technology: dual fan speeds

■

■

CLIMA MANAGEMENT IN THE BAKING CHAMBER

DRY.Plus technology: rapid humidity extraction

■

■

STEAM.Plus technology: humidity setting from 20 to 100%, programmable by the user

■

-

STEAM.Plus technology: manual humidity activation

-

■

HIGH PERFORMANCE ATMOSPHERIC BURNER

Spido.GAS™ technology: suitable for G20 / G25 / G30 / G31 gas types (only for gas ovens)

-

■

Spido.GAS™ technology: straight heat exchanger pipes for an easy service (only for gas ovens)

-

■

PATENTED DOOR

Door hinges made of high durability and self-lubricating techno-polymer

■

■

Reversible door, even after the installation (not for 16 600x400 models)

■

■

Door docking positions at 60°-120°-180°

■

■

AUXILIARY FUNCTIONS

99 baking programs memory, each one made of 3 baking steps + pre-heating

■

-

Protek.SAFE™ technology: maximum thermal efficiency and working safety (cool door glass and external surfaces)

■

■

Visualisation of the residual baking time

■

■

Continuous functioning «INF»

■

■

Visualisation of the nominal value of baking chamber temperature

■

-

«COOL» function for rapid chamber cooling

■

-

Temperature unit in °C or °F

■

-

TECHNICAL DETAILS

Rounded stainless steel AISI 304 baking chamber for hygiene and ease of cleaning

■

■

Cavity lighting through external LED lights (only for 16 600x400 model)

-

■

Cavity lighting through long-life halogen lights (only for 10 and 6 600x400 models)	■	■
High-durability carbon fibre door lock	■	■
Side opening internal glass to simplify the door cleaning	■	■
Stainless steel L-shaped rack rails	■	■
Light weight – heavy duty structure using innovative materials	■	■
Autodiagnostic system	■	-
USB and LAN port	0	-
Safety temperature switch	■	■



WA DEALER
PRACTICAL PRODUCTS PTY LTD

PH: 08 9302 1299
51 Paramount Dr Wangara WA 6065
sales@practicalproducts.com.au
www.practicalproducts.com.au