

Countertop Twin Pan Electric Multi Pan

JUMP 101DS - 58 LITRE



- 2 x 29 litre pan capacity
- 2 x 1/1 GN pan size
- 2 x 20dm² cooking surface
- 170mm depth pan
- Multi pan for cooking, frying, braising, grilling, searing, broiling and sous-vide cooking
- Automatic basket lifting
- Automatic water filling system with accuracy of 1 decilitre
- Electromechanical tray tilting at variable speed
- 10" colour touch screen for intuitive operation and cook progress display
- Automatic and manual meal preparation mode with memory for 350 programs with 20 steps
- Four point core temperature probe
- Integrated retractable hand shower

Overall Construction

- Base frame with 3mm 304 grade stainless steel
- Frame cover with 304 grade stainless steel
- Tray with 3mm 316 grade stainless steel
- Special sandwich design pan base
- Stainless steel SUPER BLOCK JPX 17 full area heat distribution system
- Robust double insulated cover with automatic lifting function
- Excessive steam exhaust on cover
- Integrated 230V / 16A socket
- Retractable switchboard panel on right pillar allowing integration of multiple pans in a single block

Controls

- Fast base preheating
- Temperature range from 30°C-250°C
- Accurate sensory measurement of temperature
- Liquid level gauge
- Integrated drainage in the tray bottom with automatic closure
- Preset technological procedures

- Automatic extension of baskets - allows operation with cover closed
- Safety sensor for basket arm detection
- Fault messages shown on display
- Water pressure controller
- HACCP recording
- USB port for data backup

Cleaning and Servicing

- Easy clean stainless steel surface
- Easy services access from front and top sides
- Technical and service information on display

Countertop Twin Pan Electric Multi Pan

JUMP 101DS - 58 LITRE

Specifications

Dimensions

Width 1280mm
Depth 850mm
Height 500mm

Capacity

58 litre

Nett weight

220kg

Packing data

548kg
Width 1450mm
Depth 1870mm
Height 710mm

Electrical rating

400-415V, 3P+N+E, 50Hz, 32A
Energy consumption: 23.3kW


Water connection requirements

Inlet connection: R 3/4
Water outlet connection: Ø 40

Installation conditions

(for precise installation instructions please refer to our installation manual)

- 1 Drain DN 40
- 2 Water Inlet 3/4"
- 3 Power Connection
- 4 LAN Jack RJ 45
- 5 Equipotential Bonding

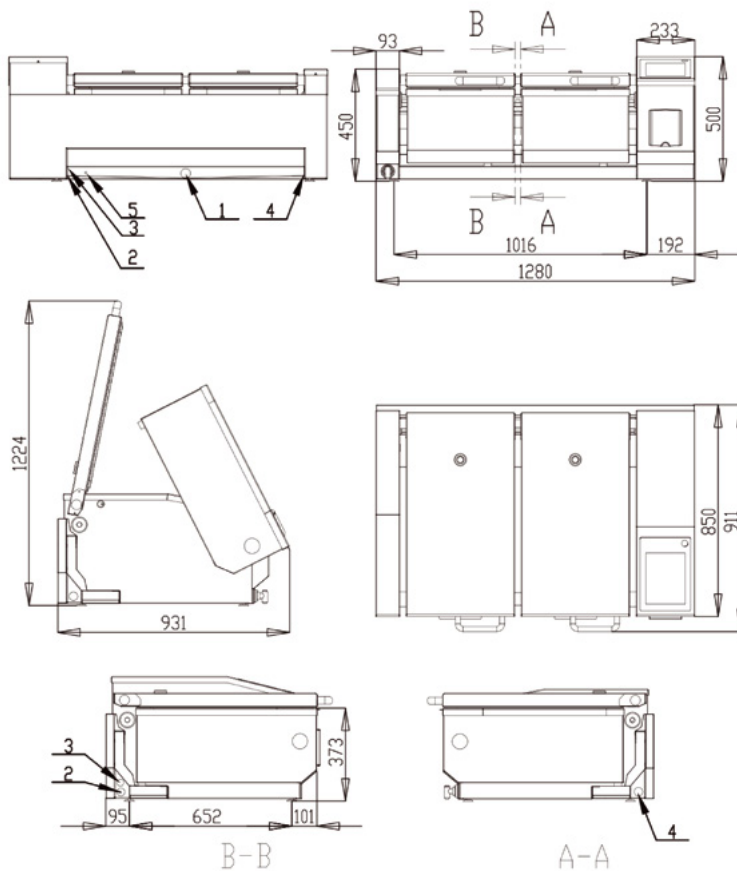

WA DEALER
PRACTICAL PRODUCTS PTY LTD

PH: 08 9302 1299
51 Paramount Dr Wangara WA 6065
sales@practicalproducts.com.au
www.practicalproducts.com.au