

GE

Economy Compact Glasswasher W 440mm x D 515mm x H 780mm

Washtech's GE is a compact glasswasher ideal for the tightest of locations. The XG features Washtech Hybrid Controls which combine IP65 stainless switches, tried-and-tested switchgear, with a customisable electronic timer.


Since 1981 Washtech dishwashers and glasswashers have been constructed from heavy-duty stainless steel, and are engineered specifically for Australian conditions and regulations. Backed by the most extensive service network and spare parts inventory in the region, your Washtech glasswasher will not let you down.

Standard Features

- Rapid 1 minute glasswashing wash cycle
- Washes up to 540 glasses per hour
- Hot water consumption of 4.5 litres per cycle
- Washtech Hybrid Controls
- Self-cleaning cycle
- Selectable cold rinse
- Easy installation, supplied complete with:
 - Dual water supply hoses (hot & cold)
 - Detergent injector with injector line
 - 15 amp plugset
 - No commissioning required
- Heavy-duty stainless steel construction
- Lower wash/rinse arm with precision moulded jets and an upper rinse jet
- Watermark approved backflow prevention
- Comprehensive 5-2-1 Warranty


Includes:

- 1 x 365mm glass rack (K0401)



GE

Economy Compact Glasswasher
W 440mm x D 515mm x H 780mm

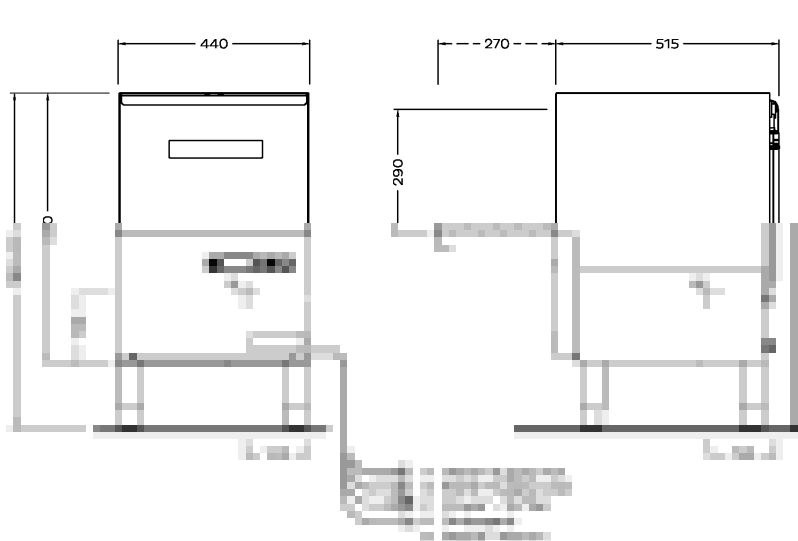

| | |
|---------------------|----------------------------|
| A Hot water | |
| Temperature | 65°C |
| Connection | 3/4" male; hose supplied |
| Pressure | 200-350kPa |
| Flow | 20 litres per min |
| Quality | Potable - refer table |
| Backflow Prevention | Atmospheric Vacuum Breaker |
| Consumption | 4.5 litres per cycle* |

| | |
|-------------------------------------------|----------------------------|
| D Cold water (optional cold rinse) | |
| Temperature | 20°C |
| Connection | 3/4" male; hose supplied |
| Pressure | 200-350kPa |
| Flow | 20 litres per min |
| Quality | Potable - refer table |
| Backflow Prevention | Atmospheric Vacuum Breaker |

| | |
|----------------|----------|
| B Waste | |
| Connection | 1.5" BSP |
| Line | 2" BSP |

| | | | | | |
|---------------------|--|----------|-----------|----------------|---------------|
| C Electrical | | V | Hz | A/phase | max kW |
| Single Phase | | 240 | 50 | 15 | 3 |

Refer operator manual for installation instructions. Isolating switch must be within 1m of, and not directly behind the machine.

*Consumption may vary with site conditions.

| | | | |
|-------------------|-----|----------------|---------------|
| Dimensions | | Machine | Packed |
| Width | 440 | 480 | |
| Depth | 515 | 570 | |
| Height | 780 | 740 | |
| Weight | 26 | 39 | |
| Cubicmetres | | 0.2 | |

| | | | |
|----------------------|----|------------|------------|
| Water Quality | | Min | Max |
| pH | 7 | 8 | |
| Hardness ppm | 20 | 100 | |
| Cl ⁻ | | 100 | |
| SO ₄ | | 400 | |
| Fe | | 0.1 | |
| Mn | | 0.5 | |
| Cu | | 0.05 | |
| Cl ₂ | | 0.1 | |

WA DEALER
PRACTICAL PRODUCTS PTY LTD

PH: 08 9302 1299
51 Paramount Dr Wangara WA 6065
sales@practicalproducts.com.au
www.practicalproducts.com.au