

UD

Professional Undercounter Dishwasher – 500mm rack
W 575mm x D 595mm x H 845mm

The Washtech UD is a versatile and highly efficient undercounter dishwasher that combines the latest technology with heavy duty stainless steel construction and components. With economical water consumption rates and powerful rinse heating, the UD provides excellent wash results while being light on operating costs and the environment.

The UD's intuitive electronic controls provide Soft Start, EcoPower, cycle customisation, chemical adjustability and immediate fault diagnosis. Capable of washing 1,500 glasses or 1,080 plates per hour, the UD is the perfect machine for busy cafes, childcare centres or office kitchens.

Since 1981 Washtech dishwashers have been constructed from heavy-duty stainless steel, and are engineered specifically for Australian conditions and regulations. Backed by the most extensive service network and spare parts inventory in the region, your Washtech UD will not let you down.

Standard Features

- 1, 2 and 3 minute cycles
- Capacity of up to 1,500 glasses / 1,080 plates per hour
- Low hot water consumption of 2.2 litres per cycle
- Sanitising rinse of >82°C
- Heavy-duty stainless steel construction
- Heavy-duty stainless steel componentry including double filtration via scrap trays and separate wash inlet filter
- Advanced electronic controls
- Soft start wash cycle
- Quick connection including:
 - Water supply hose
 - Detergent and rinse aid pumps with injector lines
 - Drain pump with outlet hose
 - 15 amp plugset
- Self-cleaning cycle
- EcoPower – reduced temperatures and energy consumption when machine is idle
- Insulated door – reduced noise and heat emissions
- Watermark approved backflow prevention
- Moffat's comprehensive 5-2-1 Warranty


Includes:

- 1 x 500mm dish rack (600 70028)
- 1 x 500mm cup rack (600 70029)
- 1 x cutlery container (C660503)



WASHTECH

UD

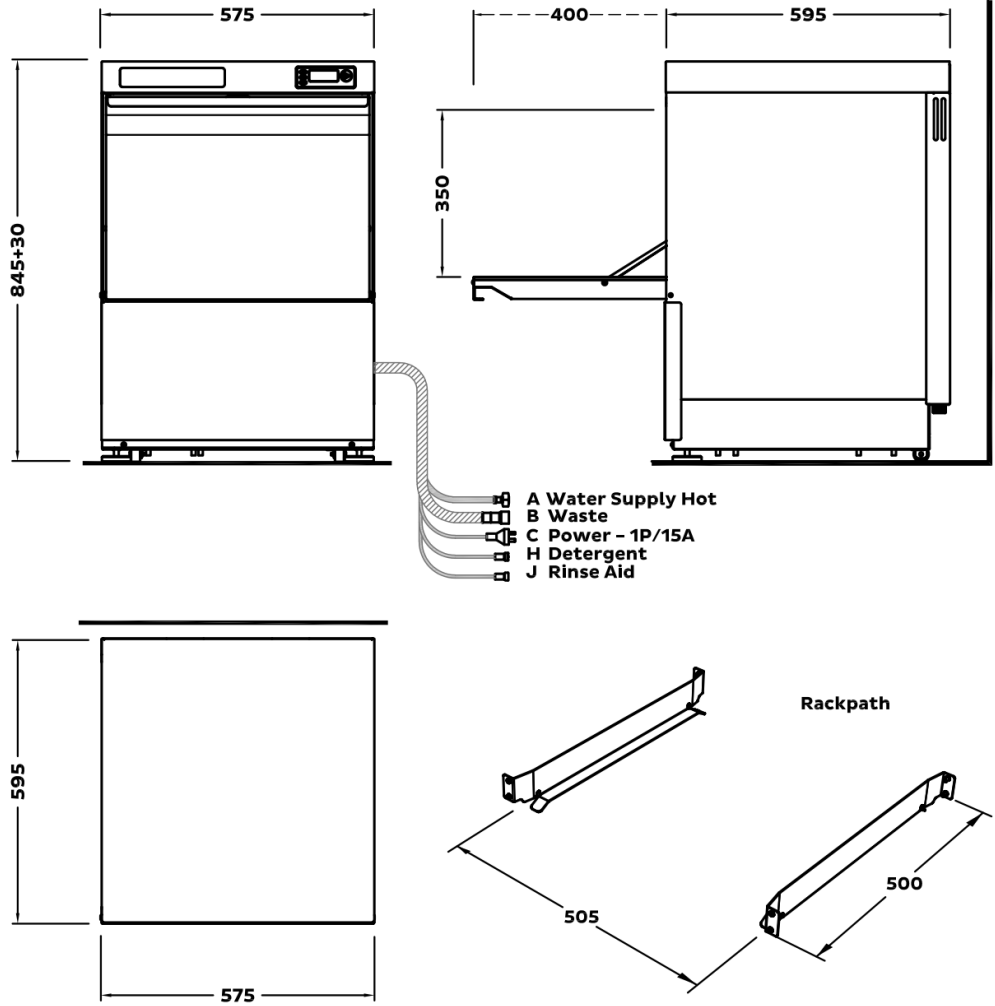

A - Hot Water

Temperature 65°C
 Connection 3/4" male; hose supplied
 Pressure 200-350kPa
 Flow 20 litres per min
 Quality Potable - refer table
 Backflow Prevention AVB
 Consumption 2.2 litres per cycle*

B - Waste - Pumped Drain

Connection 20mm male; drain pump outlet hose supplied (up to 25mm connection)
 Outlet Temp No greater than wash water temp (default = 60°C to 65°C)

| C - Electrical | V | Hz | A/phase | Max kW |
|----------------|-----|----|---------|--------|
| Single Phase | 240 | 50 | 15 | 3.37 |

Dimensions

| | Machine | Packed |
|--------------------------|---------|--------|
| Width (mm) | 575 | 620 |
| Depth (mm) | 595 | 675 |
| Height (mm) | 845 | 940 |
| Weight (kg) | 75 | 78 |
| Volume (m ³) | | 0.39 |

Water Quality

| | Min | Max |
|-----------------|-----|------|
| pH | 7 | 8 |
| Hardness (ppm) | 20 | 100 |
| Cl ⁻ | | 100 |
| SO ₄ | | 400 |
| Fe | | 0.1 |
| Mn | | 0.5 |
| Cu | | 0.05 |
| Cl ₂ | | 0.1 |

Isolating switch must be within 1m of, and not directly behind the machine.

* Water consumption rates may vary based on site conditions.

Refer to operator manual for installation instructions.