

## XM

Economy Compact Passthrough Dishwasher – 450mm rack  
**W 655mm x D 660mm x H 1530mm**

The Washtech XM is a simple-to-use and easy-to-maintain passthrough dishwasher. It's compact footprint fits neatly into a 510mm benchgap with 600mm deep benching. With one of the industry's lowest water consumption rates, the XM is highly productive, economical to operate and light on the environment.

The XM features Washtech hybrid controls which combine IP65 stainless switches and tried-and-tested switchgear with a customisable electronic timer. In addition it is equipped with a heavy duty stainless steel wash manifold.

Since 1981 Washtech dishwashers have been constructed from heavy-duty stainless steel, and are engineered specifically for Australian conditions and regulations. Backed by the most extensive service network and spare parts inventory in the region, your Washtech XM will not let you down.

### Standard Features



- 60, 120 and 180 second cycles – autostart upon hood closure
- Capacity of up to 960 glasses / 840 plates per hour
- Low hot water consumption of 2.2 litres per cycle
- Heavy-duty stainless steel construction and wash manifold
- Washtech hybrid controls
- Quick connection including:
  - Water supply hose
  - Detergent and rinse aid pumps with injector lines
  - Drain pump with outlet hose
  - 15 amp plugset
- Watermark approved backflow prevention
- Moffat's comprehensive 5-2-1 Warranty

### Includes:




- 2 x 450mm dish rack (600 70081)
- 1 x 450mm cup rack (600 70080)
- 1 x cutlery container (C660503)



## XM

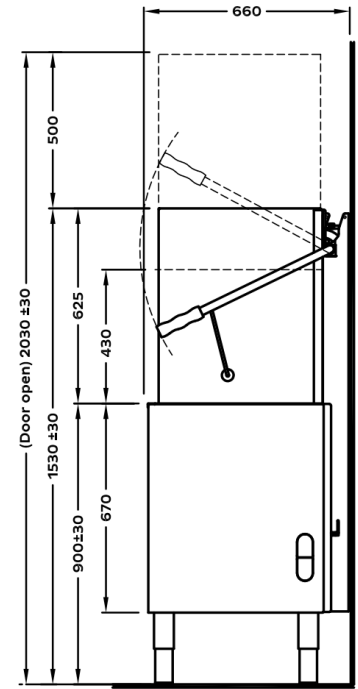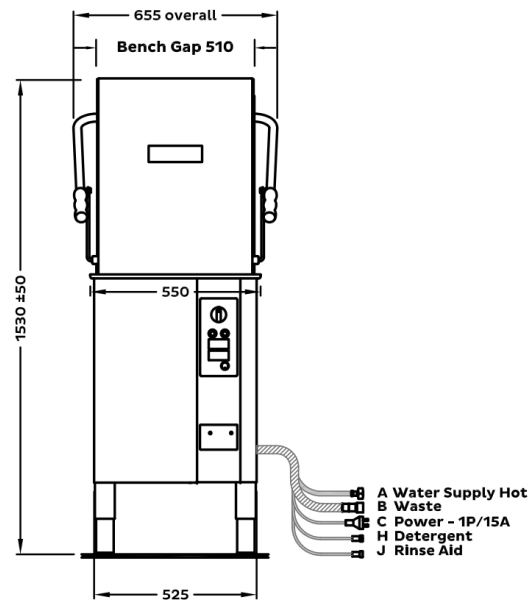

### Bench detail



### A - Hot Water

Temperature 65°C  
 Connection 3/4" male; hose supplied  
 Pressure 200-350kPa  
 Flow 20 litres per min  
 Quality Potable - refer table  
 Backflow Prevention AVB  
 Consumption 2.2 litres per cycle\*

### B - Waste - Pumped Drain

Connection Hose supplied for 38mm open standpipe 750mm high or connection to sink trap

| C - Electrical | V   | Hz | A/phase | Max kW |
|----------------|-----|----|---------|--------|
| Single Phase   | 230 | 50 | 15      | 3.37   |

### Dimensions

|                          | Machine | Packed |
|--------------------------|---------|--------|
| Width (mm)               | 655     | 685    |
| Depth (mm)               | 660     | 710    |
| Height (mm)              | 1530    | 1450   |
| Weight (kg)              | 73      | 94     |
| Volume (m <sup>3</sup> ) |         | 0.71   |

### Water Quality

|                 | Min | Max  |
|-----------------|-----|------|
| pH              | 7   | 8    |
| Hardness (ppm)  | 20  | 100  |
| Cl <sup>-</sup> |     | 100  |
| SO <sub>4</sub> |     | 400  |
| Fe              |     | 0.1  |
| Mn              |     | 0.5  |
| Cu              |     | 0.05 |
| Cl <sub>2</sub> |     | 0.1  |

### Corner Installation Notes

- Machine must face left for easy access to controls
- Allow 300 clearance to front for service access
- Splashback return must be no higher than 150mm

\* Water consumption rates may vary based on site conditions.

Isolating switch must be within 1m of, and not directly behind the machine.

Refer to operator manual for installation instructions.



**WA DEALER**  
**PRACTICAL PRODUCTS PTY LTD**

PH: 08 9302 1299  
 51 Paramount Dr Wangara WA 6065  
 sales@practicalproducts.com.au  
 www.practicalproducts.com.au

