

BASIN

Wash Basin Knee Operated – Type 3

Stoddart Manufacturing designed and introduced the Knee Operated Wash Basin with the full front knee operated panel to provide easy access to hygienic hand washing. A simple nudge with either your left or right knee or thigh activates the timed water flow.

This commercial kitchen unit comes with an integrated stainless steel splashback with bevelled top to comply with the health and plumbing requirements. Integrated splashback allows fascia mount without need to run pipe in wall.

The most popular option for kitchens has a tempering valve pre-fitted to provide comfort and improved cleaning.

With the optional Tempering valve, this basin meets AS 4674 for the design, construction & fit out of food premises.

Models:

SPPL.WB.KO3.xx

Code explanation:

SPPL = Standard Product Plumbing

WB = Wash Basin

KO3 = Knee operated, with lower plumbing shroud, integrated splashback, tap mounted in splashback and enclosed plumbing.

xx = TV – Tempering valve (optional)

e.g.: for specification and ordering

SPPL.WB.KO3.TV



Features and Benefits:

- Meets the requirements for hand washing in food premises as detailed in AS4674:2004 (4.4)
- Full front panel Easy Push button can easily be activated with either left or right knee for hygienic hands free use.
- Timed flow valve provides effective hand washing and saves water.
- Includes hygienic, aerated, WELS rated high rise spout for easy access and minimum splash.
- Plumbing components supplied with this fixture are marked with watermark licence.
- Integrated splashback, spout and shroud enclose plumbing for maximum kitchen hygiene.
- Sturdy stainless steel construction ensures lifelong service.
- Easy mount bracket has multiple fixing holes for quick installation by plumber.
- Approved for wheel chair disabled access.



Suitable for use where disabled access is required



Rating for std spout

Specifications:

- Construction:** 304 grade stainless steel construction, no 4 satin finish. Fully pre plumbed. Knee operated timed flow valve.
- Water Supply:** 15mm (1/2" BSP).
Additional a water strainer/filter to protect valves from water-borne dirt and scale is fitted as standard.
- Waste Connection:** 40mm, supplied.
- Unit Fixing:** Unit is supplied with wall mounting bracket with 10mm fixing holes. Basin is fixed with 6mm fixings.
- Disabled Fixing Height:** The unit can be mounted at 800-830mm above finished floor level for disabled use.

Models:

SPPL.WB.KO3.xx

Code explanation:

SPPL = Standard Product Plumbing


WB = Wash Basin

KO3 = Knee operated, with lower plumbing shroud, integrated splashback, tap mounted in splashback and enclosed plumbing.



xx = TV – Tempering valve (optional)

e.g.: for specification and ordering

SPPL.WB.KO3.TV

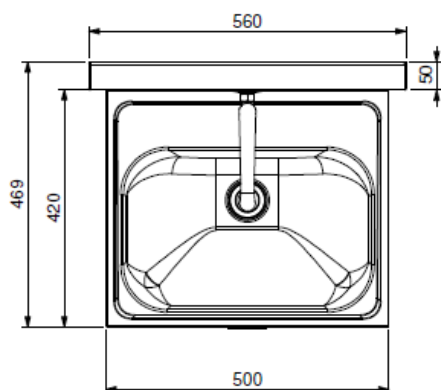

Inline Strainer Included
Water Connection

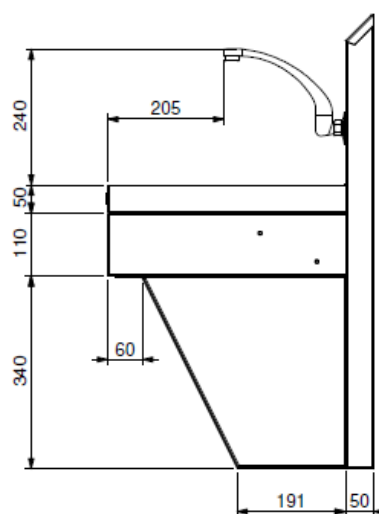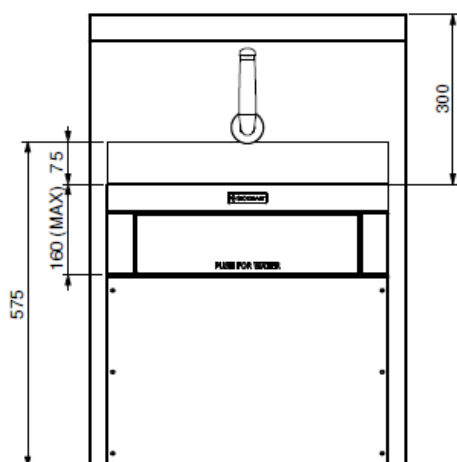

Model No.	Length (mm)	Width (mm)	Height (mm)
SPPL.WB.KO3.xx	560	469	800