

# $E15\text{-}RD\ Series\ \mathsf{ice\ and\ water\ dispenser\ with\ Chewblet}\ \mathsf{`ice\ machine}$







Shown with optional base stand #00956292

230 V 50 Hz	V 50 Hz – ice and water dispensers		
Ice storage capacity	Configuration	Item number	
6.8 kg	countertop ice and water	E15CI100A-IW-NF-ST-RD	
(15 lb)	countertop ice-only	E15CI100A-NW-NF-ST-RD	

rear draining countertop

# **Features**

Compact footprint, only 37.1 cm (14.62") W x 59.7 cm (23.50") D 6.8 kg (15 lb) ice storage capacity

Integral air-cooled ice machine with up to 54.4 kg (120 lb) daily production of popular Chewblet ice

- designed to make up to 400 servings per 12 hours<sup>1</sup>
- soft, chewable, compressed nugget ice is preferred over cubes<sup>2</sup>
- environmentally responsible R134a refrigerant with zero ozone depletion potential
- energy saving sleep mode
- quiet production without noisy harvest cycles

## Durable, attractive dispenser

- modern styling, stainless steel exterior with accent trim
- dispense-activated soft blue light illuminates point-of-use
- easy-to-clean, removable 591 ml (20 oz) drip tray
- dispenser top can support 15.9 kg (35 lb)

# Designed with sanitation in mind

- Agion\* silver-based antimicrobial product protection of key ice and water contact components<sup>3</sup>
- capacitive touch dispensing eliminates direct user contact with ice
- accommodates cups up to 22.4 cm (8.80") tall

#### Installation

- comes fully assembled

## Warranty

- 2 years parts, 5 years compressor parts

# Accessories

Base stand for converting countertop models (item# 00956292)

10.16 cm (4.00") leg kit for CI - countertop models (item# 00956300)

15.24 cm (6.00") leg kit for optional base stand (item# 00956318)

Drip tray drain kit for countertop models (includes 10.16 cm (4.00") legs) (item# 00981977)


Drip tray drain kit for models other than countertop models (item# 00956375)

Claris\* hardness removal filtration system (item# 00986059)



PH: 08 9302 1299 51 Paramount Dr Wangara WA 6065 sales@practicalproducts.com.au www.practicalproducts.com.au







	Specification	
	Ice storage capacity	6.8 kg (15 lb)
	<b>W1</b> Width	37.1 cm (14.62")
	<b>D1</b> Depth of bottom	56.2 cm (22.12")
	<b>D2</b> Depth of top	59.7 cm (23.50")
	<b>H1</b> Height – countertop models	57.2 cm (22.50")
	<b>H2</b> Height with optional base stand	119.4 cm (47.00")
	<b>H3</b> Height, base stand	62.2 cm (24.50")
	<b>H4</b> Dispense height clearance	22.40 cm (8.80")
	Ventilation clearance	7.62 cm (3.00") on each side
	Service clearance	7.62 cm (3.00") behind and on each side
	<b>C1</b> 230 V/50/1 electrical	5 amps. Connect to dedicated 10 amp circuit fuse or breaker. Dispenser has IEC 60320-C13 connector in rear of dispenser for use with appropriate modular cord.
	C2 Water inlet	1/4" MPT
	C3 Drain	1/2" ID
	Air temperature	10 - 38 C (50 -100 F)
	Water temperature	4 - 32 C (40 - 90 F)
	Water pressure	69 - 482 kpa (10 - 70 psi)
	Ice production at 21 C (70 F) air and 10 C (50 F) water	54.4 kg (120 lb) /day
	Ice production at 32 C (90 F) air and 21 C (70 F) water	40.8 kg (90 lb) /day
	Energy consumption 32 C (90 F) air and 21 C (70 F) water	7.1 kWh per 45.4 kg (100 lb) ice
	Heat rejection	1700 BTU/hr
	Water consumption	45.4 L (12 gal) of potable water per 45.4 kg (100 lb) of ice
	Approximate net weight	43 kg (95 lb)
	Approximate shipping weight	46 kg (100 lb)

NOTE: For indoor use only. Designed for commercial use. Follett is not able to provide in-house services for residential installations.


SHORT FORM SPECIFICATION: (Choose one) \_\_\_\_\_ Ice and water or \_\_\_\_\_ ice-only dispenser to be Follett\* automatic load in countertop configuration, with 6.8 kg (15 lb) of storage. Environmentally responsible R134a ice machine to be air-cooled. Ice machine to produce approximately 54.4 kg (120 lb) of Chewblet compressed nugget ice at air temperature of 21 C (70 F) and water temperature of 10 C (50 F). Ice machine to be equipped with printed circuit board and diagnostics to allow simplified servicing and with capacitive touch user interface. Storage area to be insulated with non-CFC, high density foam-in-place polyurethane. 230 V/50/1. Dispenser has IEC 60320-C13 connector in rear of dispenser for use with appropriate modular cord. CE listed.


# WA DEALER PRACTICAL PRODUCTS PTY LTD

PH: 08 9302 1299 51 Paramount Dr Wangara WA 6065 sales@practicalproducts.com.au www.practicalproducts.com.au

E15-RD Series countertop

# Dimensional drawing

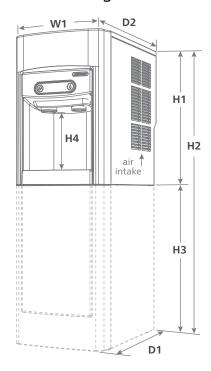

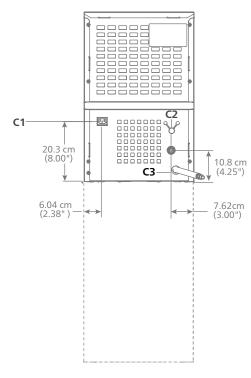

- 1 355 ml (12 oz) cups, 1/3 full of ice.
- Independent third party studies. Contact Follett for details.
- 3 Disclaimer: Antimicrobial protection is limited to the treated components and does not treat water or ice.

Claris is a registered trademark of the Aquis GmbH in Switzerland.

Agion is a registered trademark of Sciessent LLC.

Chewblet and Follett are registered trademarks of Follett LLC, registered in the US.

Follett reserves the right to change specifications at any time without obligation. Certifications may vary depending on country of origin.

Follett Europe Polska Sp. z o.o. Mokry Dwór 26C 83-021 Wiślina, Poland Phone: +48 (58) 785-6140 | Fax: +48 (58) 785-6159 folletteurope.com



 $(\epsilon$