

## NW Series Modular Dice Ice Machines – up to 630kg

**NW 1408 AS OX** Dice cube 10g, 22mm x 22mm x 22mm

**NWH 1408 AS OX** Half dice cube 6g, 10mm x 22mm x 28mm

**NWL 1408 AS OX** Large dice cube 15g, 29mm x 22mm x 29mm



Dice cube 10 g  
W 22 x D 22 x H 22 mm



Half dice cube 6 g  
W 10 x D 22 x H 28 mm



Large dice cube 15 g  
W 29 x D 22 x H 29 mm



Note: Ice production rate is measured with the water temperature at 10°C and an ambient temperature of 21°C.


- Up to 630kg daily production rate
- Head only ice maker - requires a separate storage bin to store the ice produced
- Air cooled version
- Vertical evaporator spray-system technology
- XSafe - Natural Sanitation System
- Agion Technology resists the growth of microbes and the development of unpleasant odours
- T304 grade stainless steel exterior
- Auto-alert indicator lights to show operation status and maintenance
- One touch cleaning for time and labour saving
- Front evaporator access for easy servicing
- Includes removable air filter, water and drain hose

### Recommended storage bins

- NB 530 – 243kg storage capacity
- NB 948 with CBT 48 EAMCD cover – 406kg storage capacity
- UBH 1100 – Upright storage bin with 553kg storage capacity

## NW Series Modular Dice Ice Machines – up to 630kg

### NW 1408 AS OX, NWH 1408 AS OX, NWL 1408 AS OX

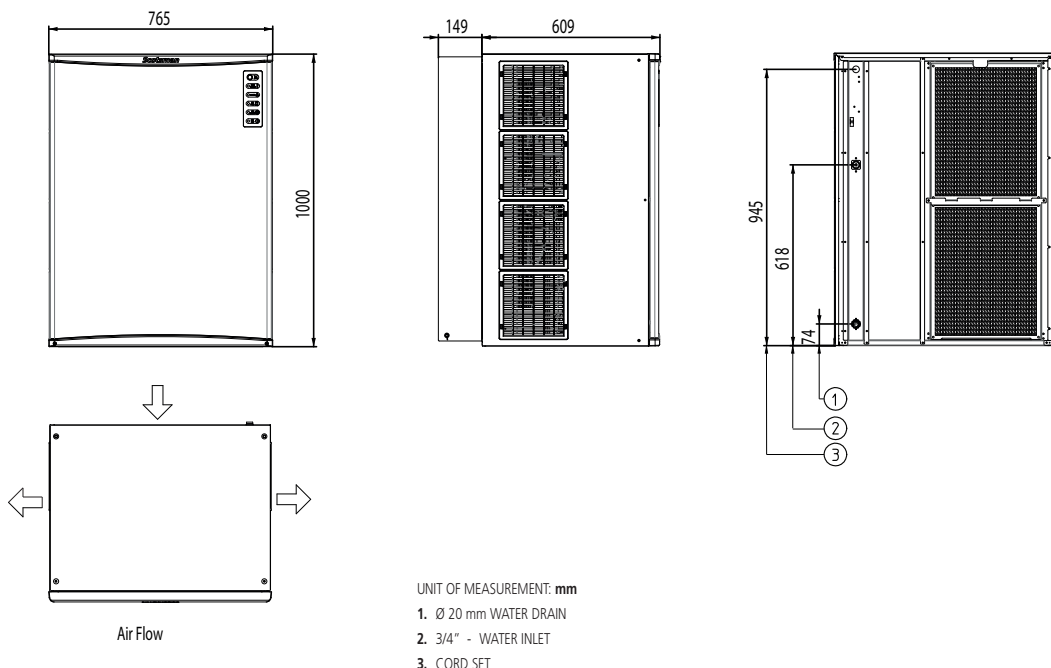

#### Ice production per 24 hours

Ambient temperature / Water temperature

	10°C / 10°C	21°C / 10°C	32°C / 21°C
NW 1408 AS OX	660	650	530
NWH 1408 AS OX	640	630	500
NWL 1408 AS OX	620	600	510

#### Dimensions

Width:	760mm
Depth:	620mm
Height:	1001mm
Nett weight:	130kg
Packed weight:	145kg

#### Water consumption

Air cooled version:

NW 1408 AS:	31.1 litres per hour
NWH 1408 AS:	26.6 litres per hour
NWL 1408 AS:	27.6 litres per hour

#### Electrical rating

Air cooled version: 230-240V, 1P+N+E, 50Hz, 2100W, 20A cordset supplied

No. Circuit wire: 5

Compressor: 9300W

Energy consumption: 68kW/hr (NW 1408 AS)  
60.8kW/hr (NWH 1408 AS)

#### Refrigerant type

R404a

#### Installation distance from wall

Rear	100mm
Sides	150mm
Operating requirement air temperature 10-43°C	

#### Water connection requirements

Inlet connection:	R 3/4"
Cold water:	5-38°C
Pressure:	100-500kPa
Water outlet connection:	Ø 20mm

#### Important Notice:

Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.



© Copyright Moffat Ltd  
AU.SM.2001

an Ali Group Company



The Spirit of Excellence



**WA DEALER**  
**PRACTICAL PRODUCTS PTY LTD**

PH: 08 9302 1299  
51 Paramount Dr Wangara WA 6065  
sales@practicalproducts.com.au  
www.practicalproducts.com.au