





Automatic rack-type dishwasher, capacity up to 150 racks, 2.700 plates or 5.400 glasses per hour



Connections mirrorwise for R/L working direction


Machine shown with optional D-90-15 dryer.

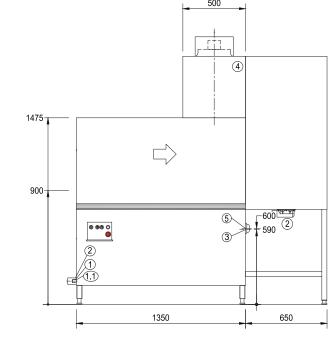



Product Advantages:

- Single rinse system 260 l/h
- Stainless steel tank cover strainer system
- Optimum hygiene safety deep drawn tank
- Two speed 100 / 150 racks / hr
- Optional heat recovery for lower operating costs
- Stainless steel 1.5kW wash pump
- Including main switch and emergency stop
- Drop-In wash arms with no end caps
- Colour-coded cleaning assistance

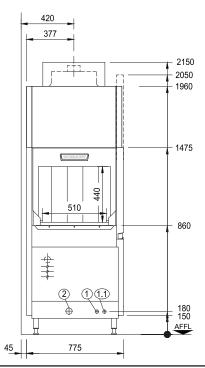

1	Warm water connection (filling)	R 3/4" 0 - 3°d, (1,4mmol/l);	
1	55-65 degrees Celcius		
1.1	For machine operation		
	Warm water connection for machine without heat recovery		
	Cold water connection for machine with heat recovery		
		R 3/4" 0 - 3°d, (1,4mmol/l);	
		max. 260 l/h; demineralized water blended to have appr. 80 µs/cm	
2	Drain	DN 50	
3	Power supply	415/50/3 N+E	
Without dryer - 28.5kW / With dryer (D90) - 32.1kW			
4	Exhaust	approx. 600m³/hr	
5	Main switch		
	Table height 900mm Machine height +/- 25mm feet ad	justable	

WA DEALER
PRACTICAL PRODUCTS PTY LTD