

## MF Series Modular Flake Ice Makers – up to 1070kg **MF 66 AS OX** Superflake ice



Superflake ice



Note: Ice production rate is measured with the water temperature at 10°C and an ambient temperature of 21°C.


- Up to 1070kg daily production rate
- Head only ice maker: requires a separate storage bin to store the ice produced
- XSafe - Natural Sanitation System
- Agion Technology resists the growth of microbes and the development of unpleasant odours
- Air cooled version
- Hermetic compressor
- Stainless steel auger and freezing cylinder (evaporator)
- Simple, reliable electromechanic controls
- Double protection – electronic rotation sensor & drive coupling
- Low-water sensor protection
- Stainless steel finish, top cover in PS plastic with removable panels for ease of maintenance
- Includes removable air filter, water and drain hose

### Recommended Storage Bins

- UBH 1100 – Upright storage bin – 553kg capacity
- SIS 700 – Ice shuttle storage system – 318kg + 73kg capacity

## MF Series Modular Flake Ice Makers – up to 1070kg

### MF 66 AS OX

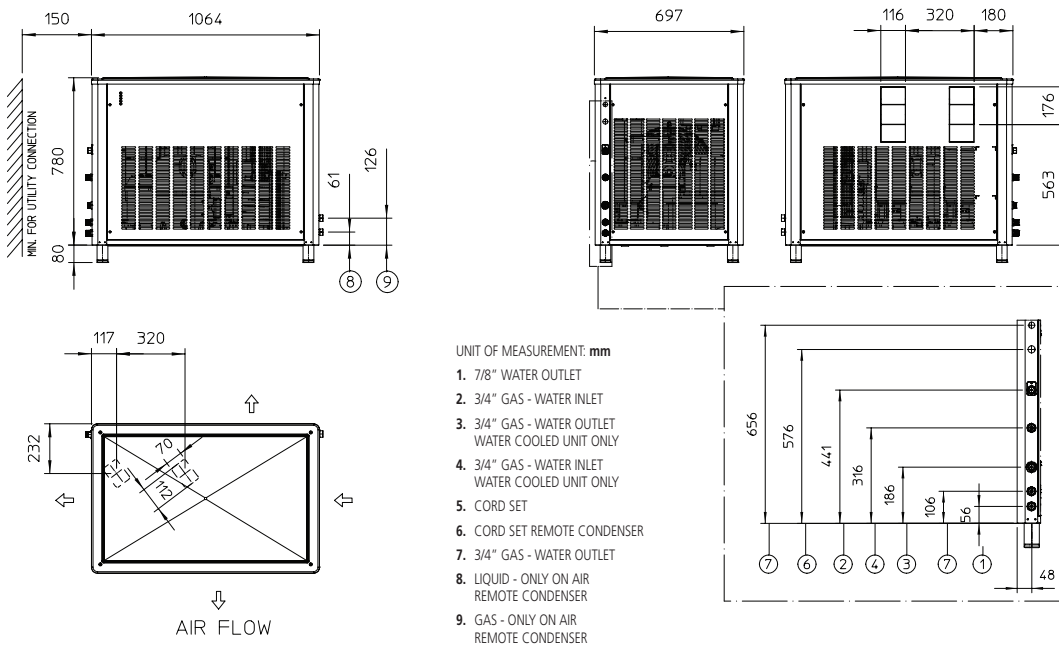

#### Ice production per 24 hours

Ambient temperature / Water temperature

| 10°C / 10°C | 21°C / 10°C | 32°C / 21°C |
|-------------|-------------|-------------|
| 1150        | 1070        | 870         |

#### Dimensions

|                |        |
|----------------|--------|
| Width:         | 1064mm |
| Depth:         | 697mm  |
| Height:        | 860mm  |
| Nett weight:   | 179kg  |
| Packed weight: | 198kg  |

#### Water consumption

Air cooled version: 36.3 litres per hour

#### Electrical rating

Air cooled version: 230-240V, 1P+N+E, 50Hz, 3900W,  
16A  
No. Circuit wire: 5  
Compressor: 3135W  
Energy consumption: 80kW/24hr

#### Refrigerant type

R452a

#### Installation distance from wall

Rear 150mm  
Sides 150mm

Operating requirement air temperature 10-43°C

#### Water connection requirements

Inlet connection: R 3/4"  
Cold water: 5-38°C  
Pressure: 100-500kPa  
Water outlet connection: Ø7/8"

#### Important Notice:

Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

© Copyright Moffat Ltd  
AU.SM.2201

**WA DEALER**  
**PRACTICAL PRODUCTS PTY LTD**

PH: 08 9302 1299  
51 Paramount Dr Wangara WA 6065  
sales@practicalproducts.com.au  
www.practicalproducts.com.au