



NW Series Modular Dice Ice Machines — up to 290kg

NW 608 AS OX Dice cube 10g, 22mm x 22mm x 22mm **NWH 608 AS OX** Half dice cube 6g, 10mm x 22mm x 28mm



Dice cube 10 g W 22 x D 22 x H 22 mm



Half dice cube 6 g W 10 x D 22 x H 28 mm



Note: Ice production rate is measured with the water temperature at 10°C and an ambient temperature of 21°C.

- Up to 290kg daily production rate
- Head only ice maker requires a separate storage bin to store the ice produced
- Air cooled version
- Vertical evaporator spray-system technology
- XSafe Natural Sanitation System
- Agion Technology resists the growth of microbes and the development of unpleasant odours
- T304 grade stainless steel exterior
- Auto-alert indicator lights to show operation status and maintenance
- One touch cleaning for time and labour saving
- Front evaporator access for easy servicing
- Includes air filter, water and drain hose
- Double stack option available

Recommended storage bins

- NB 393 178kg storage capacity
- NB 530 243kg storage capacity
- NB 948 with CBT 48 EAMCD cover 406kg storage capacity






















NW Series Modular Dice Ice Machines – up to 290kg

NW 608 AS OX, NWH 608 AS OX

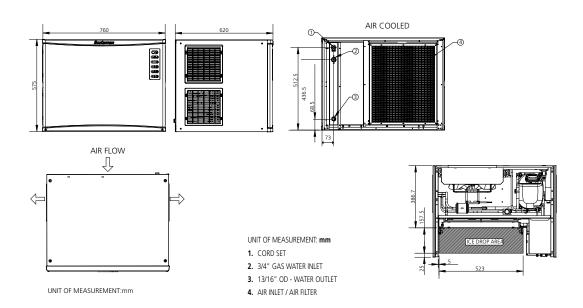

Ice production per 24 hours

Ambient temperature / Water temperature

	10°C / 10°C	21°C / 10°C	32°C / 21°C
NW 608 AS OX	315	290	230
NWH 608 AS OX	320	290	225

Dimensions

Width: 760mm
Depth: 620mm
Height: 575mm
Nett weight: 73kg
Packed weight: 88kg

Water consumption

Air cooled version: 16.9 litres per hour

Electrical rating

Air cooled version: 230-240V, 1P+N+E, 50Hz, 1600W,

10A cordset supplied

No. Circuit wire: 3 Compressor: 48500W Energy consumption: 36.6kW/24hr

Refrigerant type

R404a

Installation distance from wall Rear 100mm

Sides 150mm Operating requirement air temperature 10-43°C

Mateura and action we suring account

Water connection requirements

Inlet connection: R ¾"
Cold water: 5-38°C
Pressure: 100-500kPa
Water outlet connection: Ø 20mm